





Stelrad[®]
Radiator Group

The Radiator Book

2018

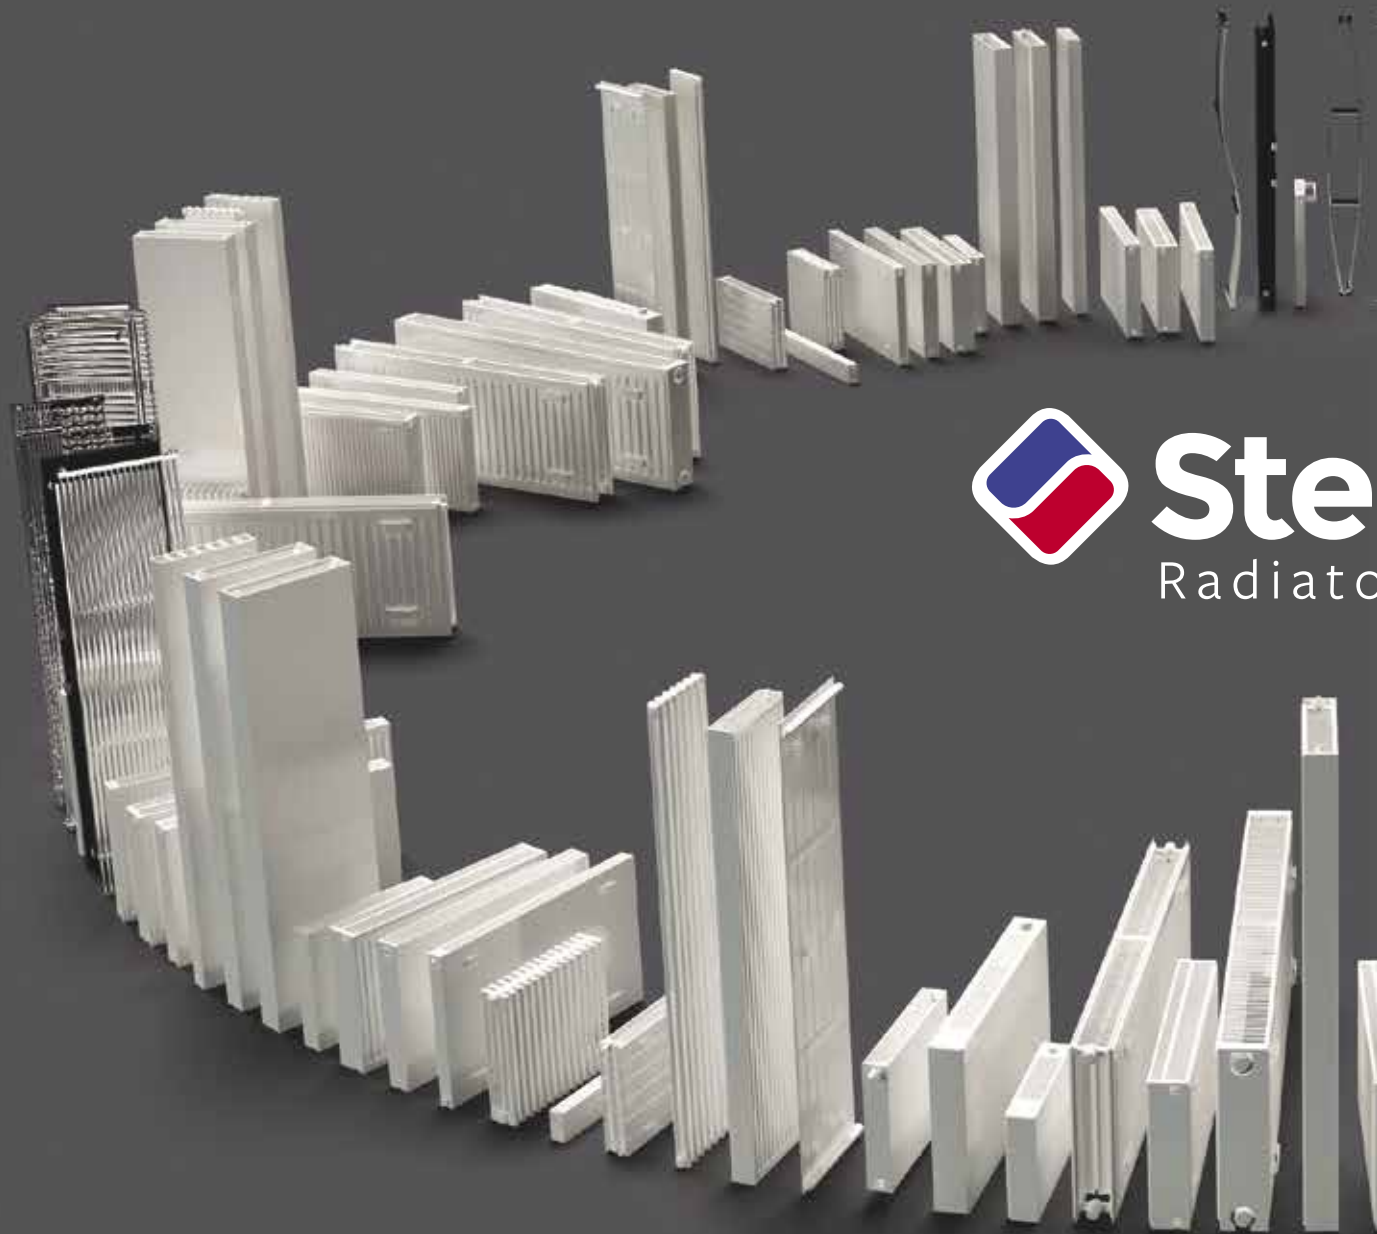

STELRAD. CONTINUALLY DEVELOPING

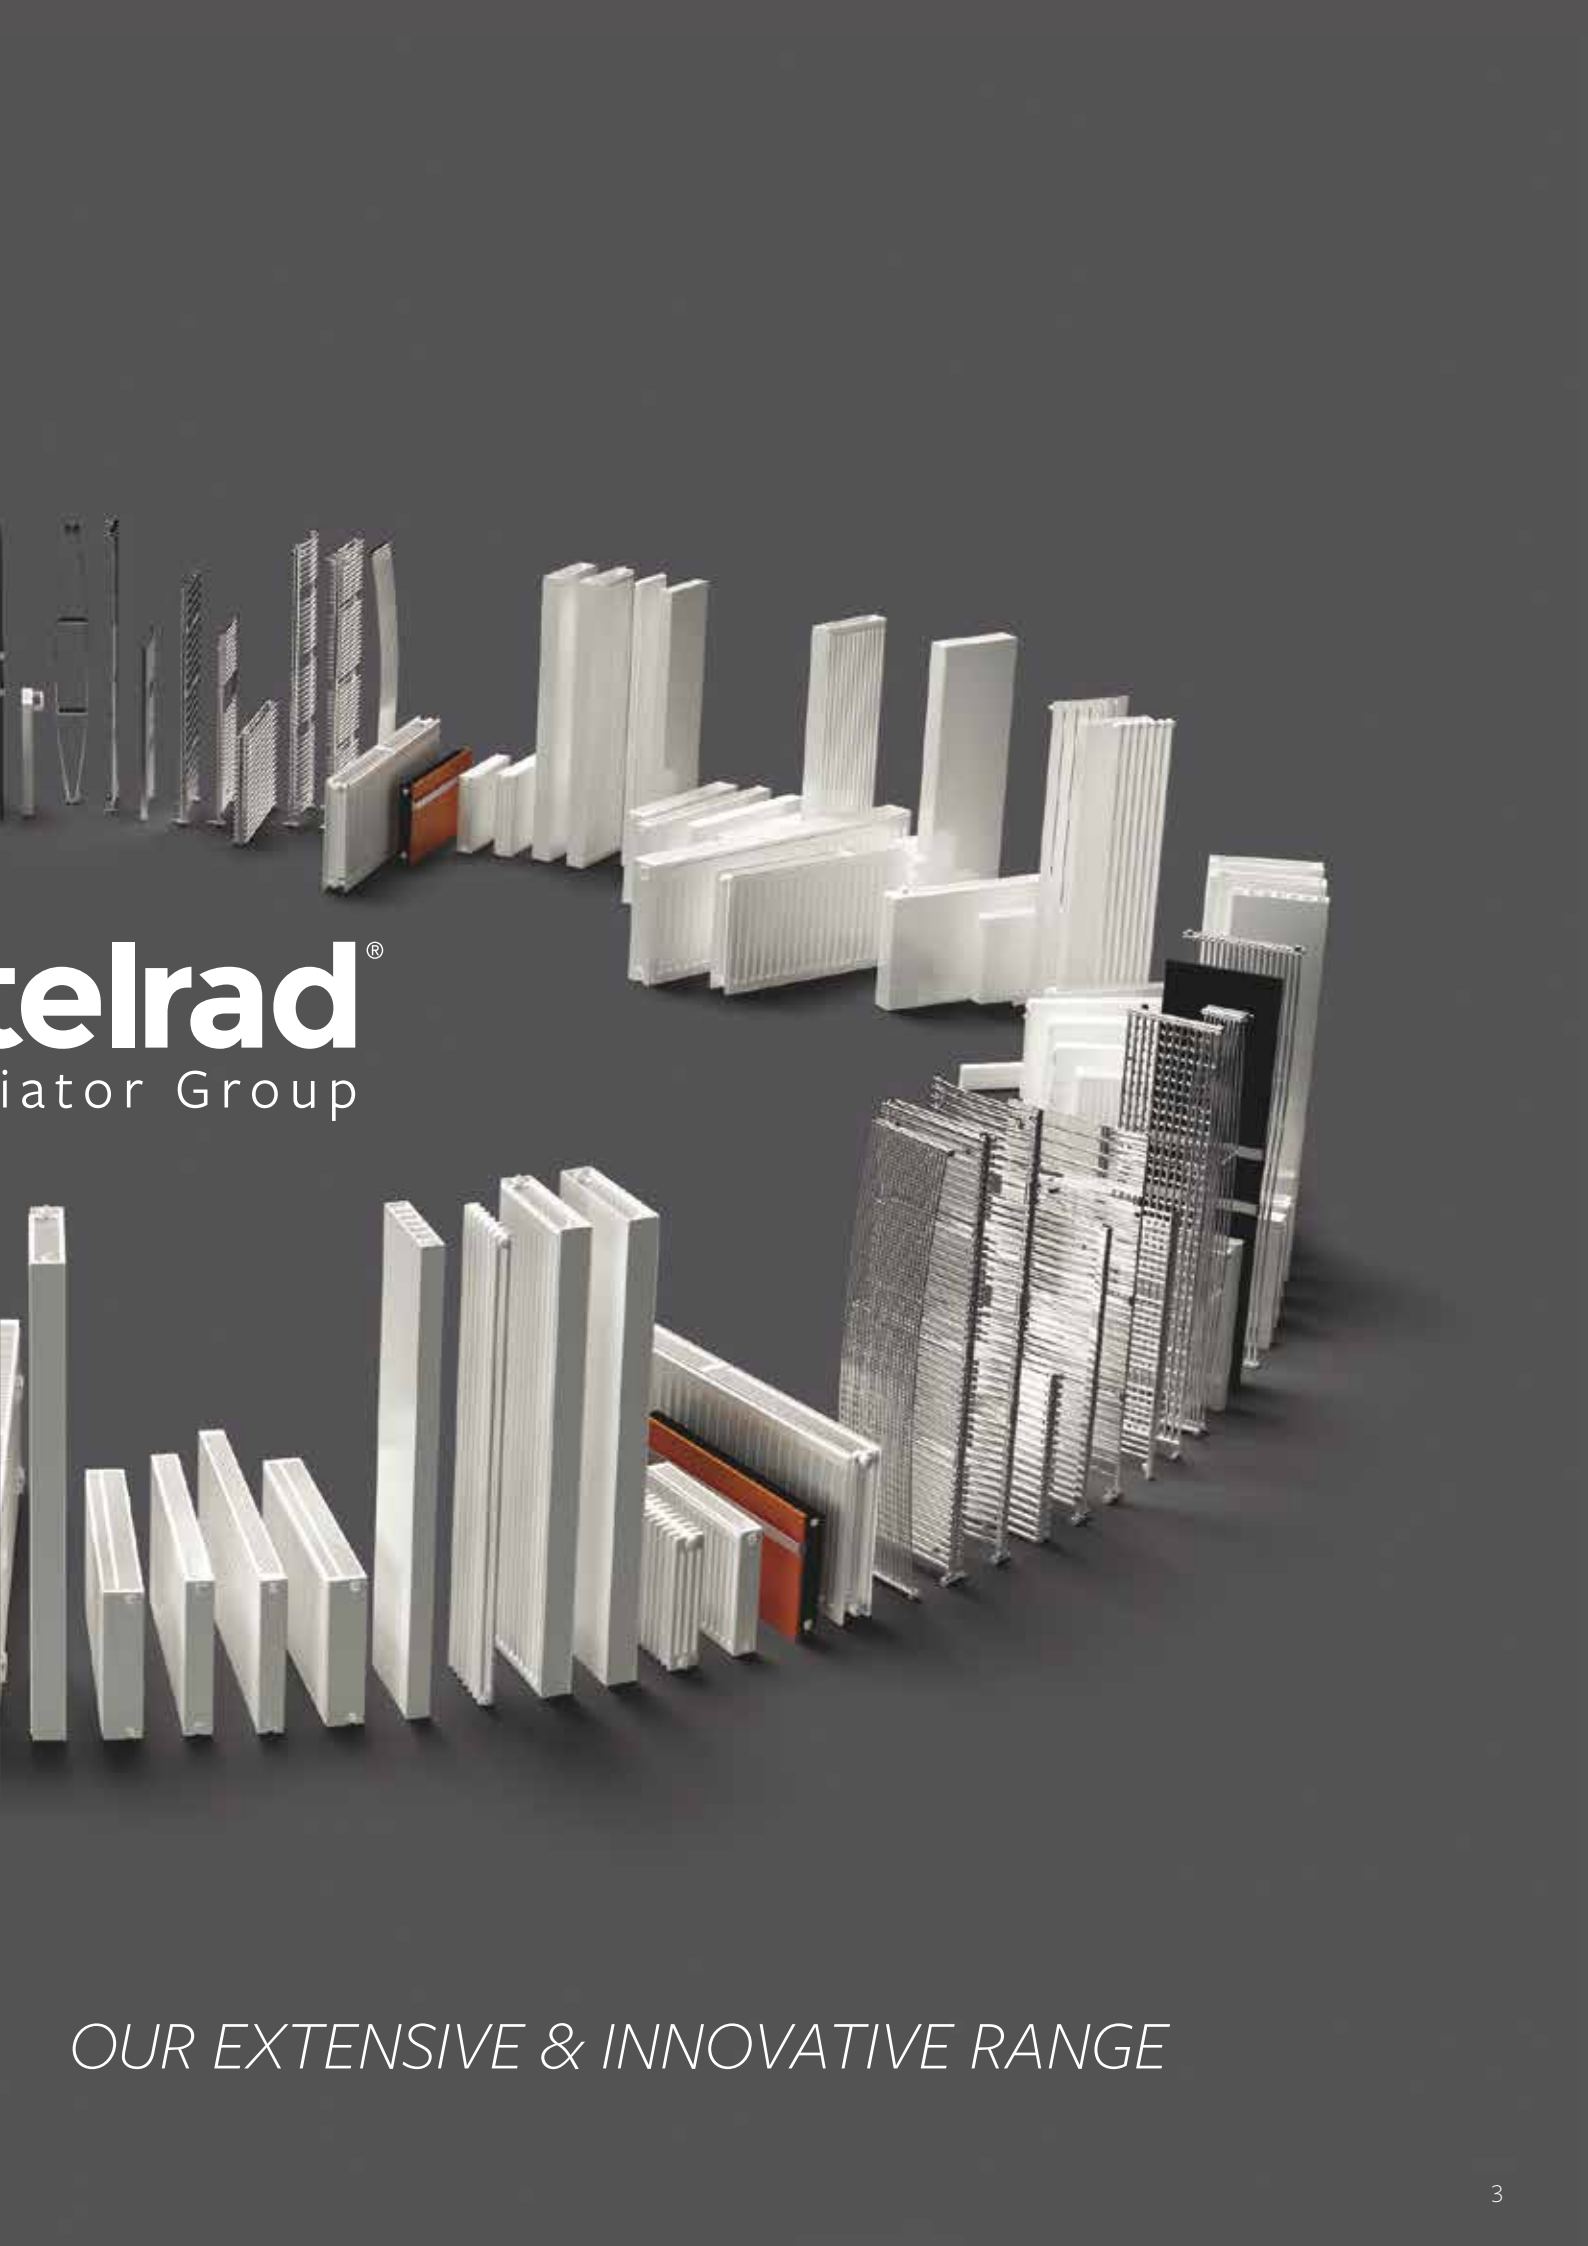

celrad[®]
iator Group

OUR EXTENSIVE & INNOVATIVE RANGE

OUR RADIATORS AT A GLANCE

STELRAD SERIES



Elite 10



Compact 12



Compact Vertex 14

VITA SERIES



Vita Value 20



Vita Compact 22



Vita Eco 24



Vita Deco 26



NEW Vita Deco Concept 28



Vita Ultra 40



Vita Compact Vertical 42



Vita Deco Vertical 44



Vita Plan Vertical 46



Vita Compact K3 48

Look out
for radiator
upgrades



AQUA SERIES

DECORATIVE COLLECTION



Slimline Towel Rail 52




Classic Towel Rail 54



STR (Stelrad Towel Radiator) 56



Caliente Rail 58



Caliente Curved Rail 60

DESIGNER COLLECTION



Vertical Ultra 66



Excel 68



Arc & Wave 70



Vistaline 72



Ellipse 74

SOFTLINE SERIES

Look out
for radiator
upgrades



Softline Compact 82



Softline Deco 84



NEW Softline Deco Concept 86



Softline Plan 88



NEW Softline Plan Concept 90

DESIGNER SERIES



Compact with Style Horizontal 108



Compact with Style Lo-Line 110



Compact with Style Vertical 112



Planar Horizontal 114



Planar Vertical 116



Classic Column Horizontal 126



Classic Column Vertical 128



Swing 130



Caliente Horizontal 132



Caliente Vertical 134

SPECIAL APPLICATION SERIES



Heavy Duty Planar 138



Compact K3 140



Compact 300 142



Compact Xtra Protection 144

RANGE
EXTENSION

SAFETY SERIES



LST Standard 148



LST Plus Vertical 150



LST i Plus 152



NEW LST i Plus Xtra Protection 154

ENERGY SAVING SERIES



Radical 158

Our extensive collection features attractive radiators in a range of sizes and heat outputs, designed to look stylish and create an unparalleled feeling of warmth and comfort.



Vita Plan 30



NEW Vita Plan Concept 32



Vita Column Horizontal 34



Vita Column Concept 36



Vita Column Vertical 38



Concord Rail 62



Esprit 64



Optia 76



NEW Softline Column Horizontal 92



NEW Softline Column Concept 94



NEW Softline Column Vertical 96



Softline Compact Vertical 98



Softline Deco Vertical 100



Softline Plan Vertical 102



Softline Compact K3 104



Concord Plane 118



Concord Lo-Line 120



Concord Vertical 122



Concord Slimline 124



LEADING THE WAY

Stelrad has been manufacturing high quality, steel radiators since 1936, so it's safe to say we know a thing or two about heating.

Since our beginnings, we've grown into the UK's number one radiator brand, manufacturing and distributing over 2.5 million radiators and products every year. With an expert research facility in Belgium, we're dedicated to continually developing innovative products and widening our extensive range to enable you to offer your customers the largest selection of technically-advanced radiator styles and sizes in the UK.

THINGS TO CONSIDER

Innovation, development and customer service is at the heart of everything we do, and we offer ranges of radiators to suit your every need. Energy saving, safety, designer style, kitchens, bathrooms - a huge choice, many available in 36 colours to match your taste and decor. Ordering is easy, and you can download simple fitting instructions and guides from our website. So when you're thinking about radiators, there's just one name to consider... Stelrad.

PRODUCT RANGES

Discover our range of designer radiators, expertly designed and styled to suit every taste and interior. You can choose from a range of shapes, sizes, colours and finishes.

COLOURS

These days you are not limited to a traditional white radiator, you have the freedom to choose the most suitable colour radiator which will complement the colour scheme of your room. Most of our radiators can be ordered in a choice of 36 colours and have up to an 8 week lead time.



FITTING

Plumbers and installers are at the heart of everything we do. Our definitive range of products offer a solution for every project and requirement. View our helpful range of downloadable installation documents and videos at Stelrad.com

QUOTE SERVICE

Our nationwide Specification and Quotes Teams are on hand to discuss your requirements for your project. Contact our expert Quotes Team for a personalised quote on 01709 572267 or email stelrad.quotes@stelrad.com

ORDERING

If you would like to order a product, please visit Stelrad.com to find your nearest stocking branch.





OUR BEST-SELLING RANGE

Stelrad is the UK's most popular radiator brand. The Stelrad Series comprises of all the best-selling products which underpin Stelrad's reputation for outstanding quality and performance.

STELRAD SERIES

Elite

Compact

Compact Vertex



The Stelrad Elite is the perfect solution when maximum heat output is needed from a steel panel radiator. The Elite range is readily available nationwide and offers versatility, quality and performance making it the UK's most popular radiator.

50 Δt

(75/65/20°C)


P1



K1



P+



K2



Height mm	Length mm	Sections	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr
300	500	15	-	-	-	8430	259	884	8436	388	1324	8442	506	1727
	1000	30	-	-	-	8431	517	1765	8437	776	2648	8443	1012	3454
	1500	45	-	-	-	8432	776	2648	8438	1164	3973	8444	1518	5181
	2000	60	-	-	-	8433	1034	3529	8439	1552	5297	8445	2024	6908
	2500	75	-	-	-	8434	1293	4413	8440	1940	6621	8446	2530	8635
	3000	90	-	-	-	8435	1551	5294	-	-	-	8447	3036	10362
450	400	12	8448	190	648	8461	307	1048	8479	442	1509	8497	564	1925
	500	15	8449	238	812	8462	384	1311	8480	553	1887	8498	705	2406
	600	18	8450	286	976	8463	461	1573	8481	664	2266	8499	845	2884
	700	21	8451	333	1137	8464	538	1836	8482	774	2642	8500	986	3365
	800	24	8452	381	1300	8465	614	2096	8483	885	3021	8501	1127	3846
	900	27	8453	428	1461	8466	691	2358	8484	995	3396	8502	1268	4328
	1000	30	8454	476	1625	8467	768	2621	8485	1106	3775	8503	1409	4809
	1100	33	-	-	-	8468	845	2884	8486	1217	4154	8504	1550	5290
	1200	36	8456	571	1949	8469	922	3147	8487	1327	4529	8505	1691	5771
	1400	42	8457	666	2273	8470	1075	3669	8488	1548	5283	8506	1973	6734
	1600	48	8458	762	2601	8471	1229	4195	8489	1770	6041	8507	2254	7693
	1800	54	-	-	-	8472	1382	4717	8490	1991	6795	8508	2536	8655
	2000	60	-	-	-	8473	1536	5242	8491	2212	7550	8509	2818	9618
	2200	66	-	-	-	8474	1690	5768	-	-	-	8510	3100	10580
	2400	72	-	-	-	8475	1843	6290	-	-	-	8511	3382	11543
	2600	78	-	-	-	8476	1997	6816	-	-	-	8512	3663	12502
	2800	84	-	-	-	8477	2150	7338	-	-	-	8513	3945	13464
	3000	90	-	-	-	8478	2304	7864	-	-	-	8514	4227	14427
600	400	12	8515	244	833	8528	400	1365	8546	564	1925	8564	711	2427
	500	15	8516	305	1041	8529	500	1707	8547	705	2406	8565	889	3034
	600	18	8517	366	1249	8530	600	2048	8548	845	2884	8566	1067	3642
	700	21	8518	427	1457	8531	700	2389	8549	986	3365	8567	1245	4249
	800	24	8519	488	1666	8532	800	2730	8550	1127	3846	8568	1422	4853
	900	27	8520	549	1874	8533	900	3072	8551	1268	4328	8569	1600	5461
	1000	30	8521	610	2082	8534	1000	3413	8552	1409	4809	8570	1778	6068
	1100	33	-	-	-	8535	1100	3754	8553	1550	5290	8571	1956	6676
	1200	36	8523	732	2498	8536	1200	4096	8554	1691	5771	8572	2134	7283
	1400	42	8524	854	2915	8537	1400	4778	8555	1973	6734	8573	2489	8495
	1600	48	8525	976	3331	8538	1600	5461	8556	2254	7693	8574	2845	9710
	1800	54	-	-	-	8539	1800	6143	8557	2536	8655	8575	3200	10922
	2000	60	-	-	-	8540	2000	6826	8558	2818	9618	8576	3556	12137
	2200	66	-	-	-	8541	2200	7509	-	-	-	8577	3912	13352
	2400	72	-	-	-	8542	2400	8191	-	-	-	8578	4267	14563
	2600	78	-	-	-	8543	2600	8874	-	-	-	8579	4623	15778
	2800	84	-	-	-	8544	2800	9556	-	-	-	8580	4978	16990
	3000	90	-	-	-	8545	3000	10239	-	-	-	8581	5334	18205
700	400	12	-	-	-	8595	457	1560	8613	639	2181	8631	804	2744
	500	15	-	-	-	8596	571	1949	8614	799	2727	8632	1006	3433
	600	18	-	-	-	8597	685	2338	8615	958	3270	8633	1207	4119
	700	21	-	-	-	8598	799	2727	8616	1118	3816	8634	1408	4806
	800	24	-	-	-	8599	914	3119	8617	1278	4362	8635	1609	5492
	900	27	-	-	-	8600	1028	3509	8618	1437	4904	8636	1810	6178
	1000	30	-	-	-	8601	1142	3898	8619	1597	5451	8637	2011	6864
	1100	33	-	-	-	8602	1256	4287	8620	1757	5997	8638	2212	7550
	1200	36	-	-	-	8603	1370	4676	8621	1916	6539	8639	2413	8236
	1400	42	-	-	-	8604	1599	5457	8622	2236	7631	8640	2815	9608
	1600	48	-	-	-	8605	1827	6236	8623	2555	8720	8641	3218	10983
	1800	54	-	-	-	8606	2056	7017	8624	2875	9812	8642	3620	12355
	2000	60	-	-	-	8607	2284	7795	-	-	-	8643	4022	13727
	2200	66	-	-	-	8608	2512	8573	-	-	-	8644	4424	15099
	2400	72	-	-	-	8609	2741	9355	-	-	-	8645	4826	16471
	2600	78	-	-	-	8610	2969	10133	-	-	-	8646	5229	17847
	2800	84	-	-	-	8611	3198	10915	-	-	-	8647	5631	19219
	3000	90	-	-	-	8612	3426	11693	-	-	-	8648	6033	20591

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.





The Stelrad Compact is the UK's best-selling and most comprehensive range of compact radiators. They're proven, high performance winners - ideal for every room and every application where space is at a premium.

50 Δt

(75/65/20°C)

K1



P+



K2



Height mm	Length mm	Sections	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr
300	500	15	143650	255	870	143656	373	1273	143662	491	1676
	1000	30	143651	509	1737	143657	745	2543	143663	982	3352
	1500	45	143652	764	2608	143658	1118	3816	143664	1473	5027
	2000	60	143653	1018	3474	143659	1490	5085	143665	1964	6703
	2500	75	143654	1273	4345	143660	1863	6358	143666	2455	8379
	3000	90	143655	1527	5212	143661	2235	7628	143667	2946	10055
450	400	12	143680	302	1031	143698	422	1440	143716	548	1870
	500	15	143681	378	1290	143699	528	1802	143717	686	2341
	600	18	143682	454	1550	143700	633	2160	143718	823	2809
	700	21	143683	529	1805	143701	739	2522	143719	960	3276
	800	24	143684	605	2065	143702	844	2881	143720	1097	3744
	900	27	143685	680	2321	143703	950	3242	143721	1234	4212
	1000	30	143686	756	2580	143704	1055	3601	143722	1371	4679
	1100	33	143687	832	2840	143705	1161	3962	143723	1508	5147
	1200	36	143688	907	3096	143706	1266	4321	143724	1645	5614
	1400	42	143689	1058	3611	143707	1477	5041	143725	1919	6550
	1600	48	143690	1210	4130	143708	1688	5761	143726	2194	7488
	1800	54	143691	1361	4645	143709	1899	6481	143727	2468	8423
	2000	60	143692	1512	5160	143710	2110	7201	143728	2742	9358
	2200	66	143693	1663	5676	143711	2321	7922	143729	3016	10294
	2400	72	143694	1814	6191	143712	2532	8642	143730	3290	11229
	2600	78	143695	1966	6710	143713	2743	9362	143731	3565	12167
	2800	84	143696	2117	7225	143714	2954	10082	143732	3839	13103
	3000	90	143697	2268	7741	143715	3165	10802	143733	4113	14038
600	400	12	143746	392	1338	143764	538	1836	143782	693	2365
	500	15	143747	490	1672	143765	673	2297	143783	866	2956
	600	18	143748	588	2007	143766	807	2754	143784	1039	3546
	700	21	143749	686	2341	143767	942	3215	143785	1212	4137
	800	24	143750	784	2676	143768	1076	3672	143786	1386	4730
	900	27	143751	882	3010	143769	1211	4133	143787	1559	5321
	1000	30	143752	980	3345	143770	1345	4590	143788	1732	5911
	1100	33	143753	1078	3679	143771	1480	5051	143789	1905	6502
	1200	36	143754	1176	4014	143772	1614	5509	143790	2078	7092
	1400	42	143755	1372	4683	143773	1883	6427	143791	2425	8277
	1600	48	143756	1568	5352	143774	2152	7345	143792	2771	9457
	1800	54	143757	1764	6021	143775	2421	8263	143793	3118	10642
	2000	60	143758	1960	6689	143776	2690	9181	143794	3464	11823
	2200	66	143759	2156	7358	143777	2959	10099	143795	3810	13004
	2400	72	143760	2352	8027	143778	3228	11017	143796	4157	14188
	2600	78	143761	2548	8696	143779	3497	11935	143797	4503	15369
	2800	84	143762	2744	9365	143780	3766	12853	143798	4850	16553
	3000	90	143763	2940	10034	143781	4035	13771	143799	5196	17734
700	400	12	143812	447	1526	143830	612	2089	143848	784	2676
	500	15	143813	559	1908	143831	765	2611	143849	981	3348
	600	18	143814	670	2287	143832	918	3133	143850	1177	4017
	700	21	143815	782	2669	143833	1071	3655	143851	1373	4686
	800	24	143816	894	3051	143834	1224	4178	143852	1569	5355
	900	27	143817	1005	3430	143835	1377	4700	143853	1765	6024
	1000	30	143818	1117	3812	143836	1530	5222	143854	1961	6693
	1100	33	143819	1229	4195	143837	1683	5744	143855	2157	7362
	1200	36	143820	1340	4573	143838	1836	6266	143856	2353	8031
	1400	42	143821	1564	5338	143839	2142	7311	143857	2745	9369
	1600	48	143822	1787	6099	143840	2448	8355	143858	3138	10710
	1800	54	143823	2011	6864	143841	2754	9399	143859	3530	12048
	2000	60	143824	2234	7625	143842	3060	10444	143860	3922	13386
	2200	66	143825	2457	8386	143843	3366	11488	143861	4314	14724
	2400	72	143826	2681	9150	143844	3672	12533	143862	4706	16062
	2600	78	143827	2904	9911	143845	3978	13577	143863	5099	17403
	2800	84	143828	3128	10676	143846	4284	14621	143864	5491	18741
	3000	90	143829	3351	11437	143847	4590	15666	143865	5883	20079

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.





COMPACT VERTEX

Stelrad® Series

The Stelrad Compact Vertex is a stylish, attractive compact radiator for applications where space is at a premium. Designed specifically to complement the UK's best-selling Stelrad Compact range.


50 Δt

(75/65/20°C)

P2



K2



Height mm	Length mm	Sections	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr
1800	400	12	148095	1146	3911	31182204	1584	5405
	500	15	-	-	-	31182205	1980	6756
	600	18	148103	1719	5867	31182206	2376	8107
	700	21	148107	2006	6846	31182207	2772	9458
2000	400	12	148096	1248	4259	31202204	1716	5855
	500	15	-	-	-	31202205	2145	7319
	600	18	148104	1872	6389	31202206	2574	8782
	700	21	148108	2184	7454	31202207	3003	10246
2200	300	9	-	-	-	31222203	1386	4729
	400	12	148097	1356	4628	31222204	1848	6305
	500	15	-	-	-	31222205	2310	7882
	600	18	148105	2034	6942	31222206	2772	9458
	700	21	148109	2373	8099	-	-	-

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV NOW AVAILABLE

Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00
145317	Angled Right White	£50.00	£60.00
145318	Angled Right Chrome	£50.00	£60.00





MARKET LEADING PRICES FROM YOUR MARKET LEADER

The Vita Series is made up of fifteen expertly selected radiators for the home, which provide unbeatable value, quality & design to suit every budget and taste.



VITA SERIES

Vita Value

Vita Compact

Vita Eco

Vita Deco

NEW Vita Deco Concept

Vita Plan

NEW Vita Plan Concept

Vita Column Horizontal

Vita Column Concept

Vita Column Vertical

Vita Ultra

Vita Compact Vertical

Vita Deco Vertical

Vita Plan Vertical

Vita Compact K3

WHY NOT UPGRADE?

VITA PLAN

from **£51.21**
exc. VAT.*



UPGRADE TO
A VITA PLAN
FROM **£17.06**



VITA DECO

from **£34.15**
exc. VAT.*



UPGRADE TO
A VITA DECO
FROM **£14.07**



VITA COMPACT

from **£20.08**
exc. VAT.*



All our Vita Series premium panel radiators have the same lugs and brackets plus all the same easy installation features that make them the UK's No.1 choice.

VITA COMPACT VERTICAL

from **£174.23** exc. VAT.**



VITA DECO VERTICAL

from **£241.13** exc. VAT.**



VITA PLAN VERTICAL

from **£259.91** exc. VAT.**



UPGRADE TO
A VITA DECO
FROM **£66.90**



UPGRADE TO
A VITA PLAN
FROM **£18.78**






Stelrad quality at the best price on the market. The Stelrad Vita Value is the obvious choice for homeowners.

50 Δt

(75/65/20°C)

K1



P+



K2



Height mm	Length mm	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT
300	500	75301105	250	851	£18.60	£22.32	-	-	-	-	-	75302205	506	1727	£27.72	£33.26
	1000	75301110	499	1703	£30.35	£36.42	-	-	-	-	-	75302210	1012	3454	£48.25	£57.90
	1500	75301115	749	2554	£43.17	£51.80	-	-	-	-	-	75302215	1518	5181	£74.11	£88.93
	400	75451104	291	992	£19.00	£22.80	-	-	-	-	-	75452204	564	1925	£30.16	£36.19
450	500	75451105	364	1240	£21.09	£25.31	-	-	-	-	-	75452205	705	2406	£35.02	£42.02
	600	75451106	436	1488	£22.16	£26.59	-	-	-	-	-	75452206	845	2884	£38.79	£46.55
	700	75451107	509	1736	£25.85	£31.02	-	-	-	-	-	75452207	986	3365	£42.24	£50.69
	800	75451108	582	1984	£29.53	£35.44	-	-	-	-	-	75452208	1127	3846	£44.82	£53.78
	900	75451109	654	2232	£33.23	£39.88	-	-	-	-	-	75452209	1268	4328	£48.48	£58.18
	1000	75451110	727	2481	£36.92	£44.30	-	-	-	-	-	75452210	1409	4809	£51.71	£62.05
	1100	75451111	800	2729	£40.62	£48.74	-	-	-	-	-	75452211	1550	5290	£56.89	£68.27
	1200	75451112	872	2977	£44.31	£53.17	-	-	-	-	-	75452212	1691	5771	£62.07	£74.48
	1400	75451114	1018	3473	£51.69	£62.03	-	-	-	-	-	75452214	1974	6734	£79.94	£95.93
	1600	75451116	1163	3969	£59.08	£70.90	-	-	-	-	-	75452216	2255	7693	£91.36	£109.63
600	1800	75451118	1309	4465	£72.14	£86.57	-	-	-	-	-	75452218	2537	8655	£102.80	£123.36
	400	75601104	375	1279	£20.70	£24.84	75602104	564	1925	£27.66	£33.19	75602204	711	2427	£32.92	£39.50
	500	75601105	469	1599	£23.02	£27.62	75602105	705	2406	£32.23	£38.68	75602205	889	3034	£38.19	£45.83
	600	75601106	562	1918	£24.17	£29.00	75602106	845	2884	£35.86	£43.03	75602206	1067	3642	£42.30	£50.76
	700	75601107	656	2238	£28.20	£33.84	75602107	986	3365	£38.55	£46.26	75602207	1245	4249	£46.07	£55.28
	800	75601108	750	2558	£32.22	£38.66	75602108	1127	3846	£44.04	£52.85	75602208	1422	4853	£48.91	£58.69
	900	75601109	843	2877	£36.25	£43.50	75602109	1268	4328	£49.56	£59.47	75602209	1600	5461	£52.90	£63.48
	1000	75601110	937	3197	£40.27	£48.32	75602110	1409	4809	£55.08	£66.10	75602210	1778	6068	£56.42	£67.70
	1100	75601111	1031	3517	£44.31	£53.17	75602111	1550	5290	£60.58	£72.70	75602211	1957	6676	£62.07	£74.48
	1200	75601112	1124	3836	£48.32	£57.98	75602112	1691	5771	£66.08	£79.30	75602212	2134	7283	£67.69	£81.23
	1400	75601114	1312	4476	£56.39	£67.67	75602114	1974	6734	£77.09	£92.51	75602214	2490	8495	£87.23	£104.68
	1600	75601116	1499	5115	£64.45	£77.34	75602116	2255	7693	£88.11	£105.73	75602216	2846	9710	£99.66	£119.59
700	1800	75601118	1687	5755	£78.70	£94.44	-	-	-	-	-	75602218	3201	10922	£112.13	£134.56
	2000	-	-	-	-	-	-	-	-	-	-	75602220	3557	12137	£171.61	£205.93
	400	75701104	427	1458	£28.30	£33.96	-	-	-	-	-	75702204	804	2744	£44.98	£53.98
	500	75701105	534	1822	£31.45	£37.74	-	-	-	-	-	75702205	1006	3433	£52.21	£62.65
	600	75701106	641	2186	£33.01	£39.61	-	-	-	-	-	75702206	1207	4119	£57.84	£69.41
	700	75701107	748	2551	£38.53	£46.24	-	-	-	-	-	75702207	1408	4806	£62.96	£75.55
	800	75701108	854	2915	£44.03	£52.84	-	-	-	-	-	75702208	1610	5492	£66.83	£80.20
	900	75701109	961	3280	£49.55	£59.46	-	-	-	-	-	75702209	1811	6178	£72.29	£86.75
	1000	75701110	1068	3644	£55.04	£66.05	-	-	-	-	-	75702210	2012	6864	£77.10	£92.52
	1100	75701111	1175	4008	£60.54	£72.65	-	-	-	-	-	75702211	2213	7550	£84.83	£101.80
	1200	75701112	1282	4373	£66.06	£79.27	-	-	-	-	-	75702212	2414	8236	£92.53	£111.04
	1400	75701114	1495	5102	£77.07	£92.48	-	-	-	-	-	75702214	2816	9608	£119.20	£143.04
	1600	75701116	1709	5830	£88.06	£105.67	-	-	-	-	-	75702216	3219	10983	£136.22	£163.46
	1800	75701118	1922	6559	£107.58	£129.10	-	-	-	-	-	75702218	3621	12355	£153.25	£183.90

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.






The Stelrad Vita Compact is a stylish compact radiator, with a compact price to match.


50 Δt

(75/65/20°C)

K1



P+



K2



Height mm	Length mm	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT
300	500	76301105	247	843	£20.08	£24.10	-	-	-	-	-	76302205	491	1676	£29.94	£35.93
	1000	76301110	494	1686	£32.77	£39.32	-	-	-	-	-	76302210	982	3352	£52.09	£62.51
	1500	76301115	741	2528	£46.61	£55.93	-	-	-	-	-	76302215	1473	5027	£80.04	£96.05
	400	76451104	286	977	£20.50	£24.60	-	-	-	-	-	76452204	548	1870	£32.58	£39.10
450	500	76451105	358	1221	£22.78	£27.34	-	-	-	-	-	76452205	686	2341	£37.82	£45.38
	600	76451106	430	1466	£23.93	£28.72	-	-	-	-	-	76452206	823	2809	£41.89	£50.27
	700	76451107	501	1710	£27.91	£33.49	-	-	-	-	-	76452207	960	3276	£45.61	£54.73
	800	76451108	573	1954	£31.90	£38.28	-	-	-	-	-	76452208	1097	3744	£48.41	£58.09
	900	76451109	644	2199	£35.89	£43.07	-	-	-	-	-	76452209	1234	4212	£52.37	£62.84
	1000	76451110	716	2443	£39.87	£47.84	-	-	-	-	-	76452210	1371	4679	£55.85	£67.02
	1100	76451111	788	2687	£43.86	£52.63	-	-	-	-	-	76452211	1508	5147	£61.45	£73.74
	1200	76451112	859	2932	£47.84	£57.41	-	-	-	-	-	76452212	1645	5614	£67.03	£80.44
	1400	76451114	1002	3420	£55.81	£66.97	-	-	-	-	-	76452214	1920	6550	£86.33	£103.60
	1600	76451116	1146	3909	£63.79	£76.55	-	-	-	-	-	76452216	2195	7488	£98.66	£118.39
600	1800	76451118	1289	4397	£77.92	£93.50	-	-	-	-	-	76452218	2469	8423	£111.02	£133.22
	400	76601104	369	1260	£22.37	£26.84	76602104	538	1836	£29.87	£35.84	76602204	693	2365	£35.55	£42.66
	500	76601105	462	1575	£24.85	£29.82	76602105	673	2297	£34.81	£41.77	76602205	866	2956	£41.26	£49.51
	600	76601106	554	1890	£26.10	£31.32	76602106	807	2754	£38.73	£46.48	76602206	1039	3546	£45.70	£54.84
	700	76601107	646	2204	£30.45	£36.54	76602107	942	3215	£41.62	£49.94	76602207	1212	4137	£49.76	£59.71
	800	76601108	738	2519	£34.80	£41.76	76602108	1076	3672	£47.57	£57.08	76602208	1386	4730	£52.80	£63.36
	900	76601109	831	2834	£39.14	£46.97	76602109	1211	4133	£53.52	£64.22	76602209	1559	5321	£57.11	£68.53
	1000	76601110	923	3149	£43.49	£52.19	76602110	1345	4590	£59.47	£71.36	76602210	1732	5911	£60.93	£73.12
	1100	76601111	1015	3464	£47.84	£57.41	76602111	1480	5051	£65.42	£78.50	76602211	1906	6502	£67.03	£80.44
	1200	76601112	1108	3779	£52.18	£62.62	76602112	1615	5509	£71.36	£85.63	76602212	2078	7092	£73.11	£87.73
	1400	76601114	1292	4409	£60.89	£73.07	76602114	1884	6427	£83.26	£99.91	76602214	2426	8277	£94.19	£113.03
	1600	76601116	1477	5039	£69.60	£83.52	76602116	2153	7345	£95.16	£114.19	76602216	2772	9457	£107.64	£129.17
700	1800	76601118	1661	5669	£85.00	£102.00	-	-	-	-	-	76602218	3119	10642	£121.09	£145.31
	2000	-	-	-	-	-	-	-	-	-	-	76602220	3465	11823	£185.33	£222.40
	400	76701104	421	1436	£30.57	£36.68	-	-	-	-	-	76702204	784	2676	£48.58	£58.30
	500	76701105	526	1795	£33.97	£40.76	-	-	-	-	-	76702205	981	3348	£56.38	£67.66
	600	76701106	631	2154	£35.66	£42.79	-	-	-	-	-	76702206	1177	4017	£62.45	£74.94
	700	76701107	736	2513	£41.61	£49.93	-	-	-	-	-	76702207	1373	4686	£68.00	£81.60
	800	76701108	842	2872	£47.56	£57.07	-	-	-	-	-	76702208	1569	5355	£72.16	£86.59
	900	76701109	947	3230	£53.50	£64.20	-	-	-	-	-	76702209	1765	6024	£78.07	£93.68
	1000	76701110	1052	3589	£59.45	£71.34	-	-	-	-	-	76702210	1962	6693	£83.27	£99.92
	1100	76701111	1157	3948	£65.38	£78.46	-	-	-	-	-	76702211	2158	7362	£91.59	£109.91
	1200	76701112	1262	4307	£71.34	£85.61	-	-	-	-	-	76702212	2354	8031	£99.92	£119.90
	1400	76701114	1473	5025	£83.23	£99.88	-	-	-	-	-	76702214	2746	9369	£128.72	£154.46
	1600	76701116	1683	5743	£95.11	£114.13	-	-	-	-	-	76702216	3139	10710	£147.11	£176.53
	1800	76701118	1894	6461	£116.18	£139.42	-	-	-	-	-	76702218	3531	12048	£165.50	£198.60

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).


For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

UPGRADE TO A
VITA DECO
FROM

£14.07*

*based on a 300 x 500 K1



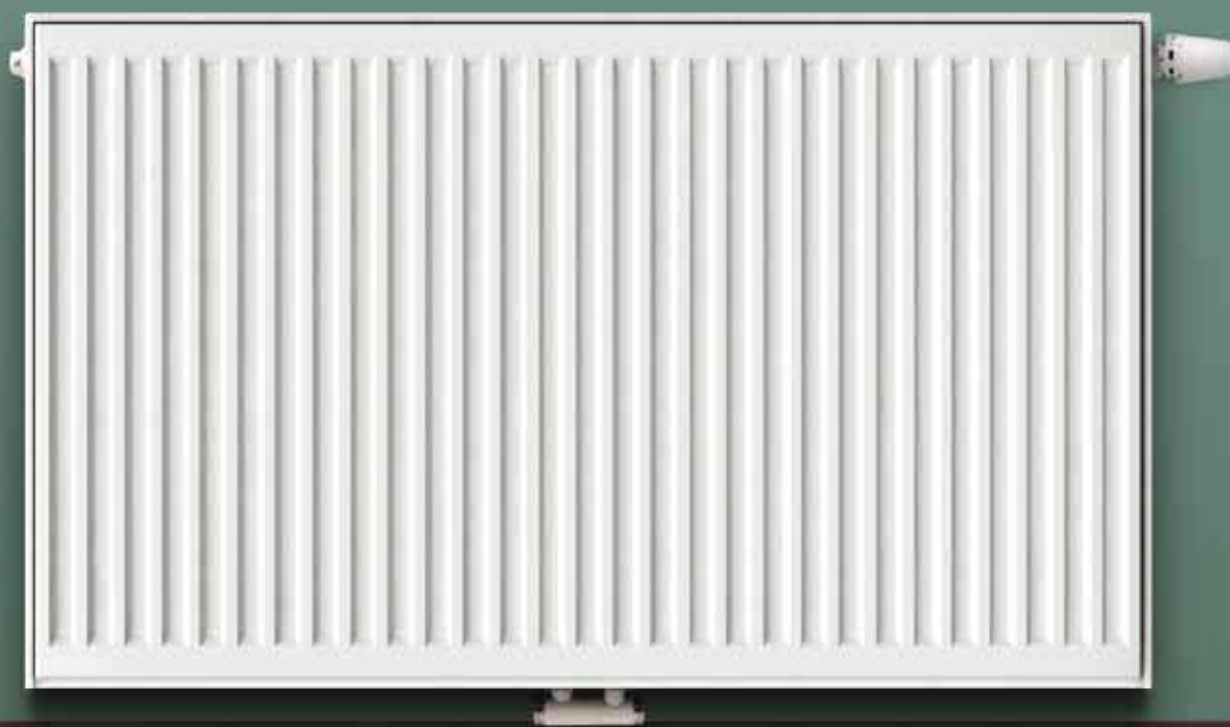

Save money & energy. Highly efficient energy saving radiator saving up to 10.5% on fuel bills, at a cost-effective price, that's the Stelrad Vita Eco.

50 Δt

(75/65/20°C)

K1



Height mm	Length mm	Straight 10mm	Angle 10mm	Straight 15mm	Angle 15mm	Heat output Watts	Heat output Btu/h	Price excl VAT	Price incl VAT
300	1000	843111010S	843111010A	843111015S	843111015A	509	1737	£87.20	£104.64
500	400	845110410S	845110410A	845110415S	845110415A	333	1136	£66.05	£79.26
	500	845110510S	845110510A	845110515S	845110515A	417	1423	£69.14	£82.97
	600	845110610S	845110610A	845110615S	845110615A	500	1706	£70.70	£84.84
600	400	846110410S	846110410A	846110415S	846110415A	392	1338	£71.62	£85.94
	500	846110510S	846110510A	846110515S	846110515A	490	1672	£75.35	£90.42
	600	846110610S	846110610A	846110615S	846110615A	588	2006	£77.21	£92.65

K2



Height mm	Length mm	Straight 10mm	Angle 10mm	Straight 15mm	Angle 15mm	Heat output Watts	Heat output Btu/h	Price excl VAT	Price incl VAT
300	1000	843221010S	843221010A	843221015S	843221015A	933	3183	£116.13	£139.36
500	400	845220410S	845220410A	845220415S	845220415A	560	1911	£82.48	£98.98
	500	845220510S	845220510A	845220515S	845220515A	701	2392	£89.60	£107.52
	600	845220610S	845220610A	845220615S	845220615A	841	2869	£95.15	£114.18
	700	845220710S	845220710A	845220715S	845220715A	981	3347	£100.22	£120.26
	800	845220810S	845220810A	845220815S	845220815A	1121	3825	£104.00	£124.80
	900	845220910S	845220910A	845220915S	845220915A	1261	4303	£109.39	£131.27
	1000	845221010S	845221010A	845221015S	845221015A	1401	4780	£114.14	£136.97
	1200	845221210S	845221210A	845221215S	845221215A	1681	5736	£129.35	£155.22
	1400	845221410S	845221410A	845221415S	845221415A	1961	6691	£155.63	£186.76
	1600	845221610S	845221610A	845221615S	845221615A	2242	7650	£172.43	£206.92
	1800	845221810S	845221810A	845221815S	845221815A	2522	8605	£189.21	£227.05
	2000	845222010S	845222010A	845222015S	845222015A	2802	9560	£269.34	£323.21
600	400	846220410S	846220410A	846220415S	846220415A	647	2208	£91.35	£109.62
	500	846220510S	846220510A	846220515S	846220515A	809	2760	£99.90	£119.88
	600	846220610S	846220610A	846220615S	846220615A	970	3310	£106.53	£127.84
	700	846220710S	846220710A	846220715S	846220715A	1132	3862	£112.63	£135.16
	800	846220810S	846220810A	846220815S	846220815A	1294	4415	£117.21	£140.65
	900	846220910S	846220910A	846220915S	846220915A	1455	4964	£123.65	£148.38
	1000	846221010S	846221010A	846221015S	846221015A	1617	5517	£129.35	£155.22
	1100	846221110S	846221110A	846221115S	846221115A	1779	6070	£138.46	£166.15
	1200	846221210S	846221210A	846221215S	846221215A	1940	6619	£147.59	£177.11
	1400	846221410S	846221410A	846221415S	846221415A	2264	7725	£179.14	£214.97
	1600	846221610S	846221610A	846221615S	846221615A	2587	8827	£199.27	£239.12
	1800	846221810S	846221810A	846221815S	846221815A	2911	9932	£219.42	£263.30
	2000	846222010S	846222010A	846222015S	846222015A	3234	11034	£315.58	£378.70

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

Accessories included are:

- TRV head
- Integral Thermostatic Valve
- Piping connections with either 10mm or 15mm couplings
- Hydro connection block with straight or angled piping options
- Hydro block also includes drain off function





The Stelrad Vita Deco's sleek and elegant lines make this an easy move to designer radiators. With a premium exterior and Stelrad quality, it's a clear choice for the interior-conscious homeowner.

50 Δt

(75/65/20°C)

K1



K2



Height mm	Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/h	Price excl VAT	Price incl VAT	Stelrad UIN	Heat output Watts	Heat output Btu/h	Price excl VAT	Price incl VAT
300	500	82301105	235	802	£34.15	£40.98	82302205	465	1587	£50.90	£61.08
	1000	82301110	469	1601	£55.73	£66.88	82302210	929	3171	£88.57	£106.28
	1500	82301115	704	2401	£79.26	£95.11	82302215	1394	4756	£136.06	£163.27
450	400	82451104	268	915	£34.85	£41.82	82452204	500	1705	£55.39	£66.47
	600	82451106	403	1376	£40.67	£48.80	82452206	750	2559	£71.22	£85.46
	800	82451108	537	1834	£54.22	£65.06	82452208	999	3410	£82.28	£98.74
	1000	82451110	672	2292	£67.77	£81.32	82452210	1249	4262	£94.93	£113.92
	1200	82451112	806	2751	£81.32	£97.58	82452212	1499	5114	£113.94	£136.73
	1400	82451114	941	3209	£94.90	£113.88	82452214	1749	5967	£146.78	£176.14
	1600	82451116	1075	3668	£108.45	£130.14	82452216	1999	6819	£167.74	£201.29
	1800	82451118	1209	4126	£132.46	£158.95	82452218	2248	7672	£188.72	£226.46
600	400	82601104	348	1188	£38.01	£45.61	82602204	640	2184	£60.43	£72.52
	600	82601106	522	1782	£44.37	£53.24	82602206	961	3280	£77.68	£93.22
	800	82601108	696	2375	£59.15	£70.98	82602208	1281	4372	£89.78	£107.74
	1000	82601110	870	2969	£73.94	£88.73	82602210	1601	5464	£103.59	£124.31
	1200	82601112	1044	3563	£88.72	£106.46	82602212	1921	6556	£124.29	£149.15
	1400	82601114	1218	4157	£103.51	£124.21	82602214	2242	7649	£160.12	£192.14
	1600	82601116	1392	4751	£118.30	£141.96	82602216	2563	8744	£183.00	£219.60
	1800	82601118	1566	5345	£144.49	£173.39	82602218	2883	9836	£205.85	£247.02
	2000	82601120	1740	5939	£148.22	£177.86	82602220	3203	10928	£315.07	£378.08

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

See how a Stelrad Vita Deco is manufactured at www.stelrad.com

UPGRADE TO A
VITA PLAN
FROM

£17.06*

*based on a 300 x 500 K1





NEW VITA DECO CONCEPT



Designer looks with a dash of extra style. The Vita Deco Concept in Anthracite Grey adds cool contemporary colour to sleek and elegant lines to make a smart fashion statement that'll complement any choice of décor.

50 Δt

(75/65/20°C)

K1



K2



Height mm	Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/h	Price excl VAT	Price incl VAT	Stelrad UIN	Heat output Watts	Heat output Btu/h	Price excl VAT	Price incl VAT
600	400	22601104	348	1187	£108.01	£129.61	22602204	640	2184	£130.43	£156.52
	600	22601106	522	1781	£114.37	£137.24	22602206	961	3279	£147.68	£177.22
	800	22601108	696	2375	£129.15	£154.98	22602208	1281	4371	£159.78	£191.74
	1000	22601110	870	2968	£143.94	£172.73	22602210	1601	5463	£173.59	£208.31
	1200	22601112	1044	3562	£158.72	£190.46	22602212	1921	6554	£194.29	£233.15
	1400	22601114	1218	4156	£173.51	£208.21	22602214	2241	7646	£230.12	£276.14

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

VITA DECO CONCEPT COMES IN RAL: A7016 ANTHRACITE GREY AND IS AVAILABLE FROM STOCK.



A7016 Anthracite Grey



A minimal, stylish design for an understated, flat finish, the Stelrad Vita Plan is simplicity at its best. Available in a wide range of heights and widths, the Vita Plan can be tailored to work for any space.

50 Δt

(75/65/20°C)

K1



K2



Height mm	Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/h	Price excl VAT	Price incl VAT	Stelrad UIN	Heat output Watts	Heat output Btu/h	Price excl VAT	Price incl VAT
300	500	81301105	235	802	£51.21	£61.45	81302205	465	1587	£76.34	£91.61
	1000	81301110	469	1601	£83.58	£100.30	81302210	929	3171	£132.85	£159.42
	1500	81301115	704	2401	£118.87	£142.64	81302215	1394	4756	£204.10	£244.92
450	400	81451104	268	915	£52.29	£62.75	81452204	500	1705	£83.10	£99.72
	600	81451106	403	1376	£61.01	£73.21	81452206	750	2559	£106.81	£128.17
	800	81451108	537	1834	£81.33	£97.60	81452208	999	3410	£123.42	£148.10
	1000	81451110	672	2292	£101.67	£122.00	81452210	1249	4262	£142.41	£170.89
	1200	81451112	806	2751	£122.00	£146.40	81452212	1499	5114	£170.91	£205.09
	1400	81451114	941	3209	£142.35	£170.82	81452214	1749	5967	£220.15	£264.18
	1600	81451116	1075	3668	£162.68	£195.22	81452216	1999	6819	£251.60	£301.92
	1800	81451118	1209	4126	£198.69	£238.43	81452218	2248	7672	£283.08	£339.70
600	400	81601104	348	1188	£57.02	£68.42	81602204	640	2184	£90.64	£108.77
	600	81601106	522	1782	£66.55	£79.86	81602206	961	3280	£116.51	£139.81
	800	81601108	696	2375	£88.72	£106.46	81602208	1281	4372	£134.67	£161.60
	1000	81601110	870	2969	£110.91	£133.09	81602210	1601	5464	£155.38	£186.46
	1200	81601112	1044	3563	£133.07	£159.68	81602212	1921	6556	£186.44	£223.73
	1400	81601114	1218	4157	£155.28	£186.34	81602214	2242	7649	£240.18	£288.22
	1600	81601116	1392	4751	£177.46	£212.95	81602216	2563	8744	£274.48	£329.38
	1800	81601118	1566	5345	£216.74	£260.09	81602218	2883	9836	£308.78	£370.54
	2000	81601120	1740	5939	£222.32	£266.78	81602220	3203	10928	£472.59	£567.11

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.





NEW VITA PLAN CONCEPT



The understated, minimalist design of the simply stunning Vita Plan Concept is complemented by the grace and elegance of its Anthracite Grey finish – with a range of heights and widths to perfectly match any space.

50 Δt

(75/65/20°C)

K1



K2



Height mm	Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/h	Price excl VAT	Price incl VAT	Stelrad UIN	Heat output Watts	Heat output Btu/h	Price excl VAT	Price incl VAT
600	400	21601104	364	1242	£127.02	£152.42	21602204	654	2231	£160.64	£192.77
	600	21601106	547	1866	£136.55	£163.86	21602206	980	3344	£186.51	£223.81
	800	21601108	729	2487	£158.72	£190.46	21602208	1307	4459	£204.67	£245.60
	1000	21601110	911	3108	£180.91	£217.09	21602210	1634	5575	£225.38	£270.46
	1200	21601112	1093	3729	£203.07	£243.68	21602212	1961	6691	£256.44	£307.73
	1400	21601114	1275	4350	£225.28	£270.34	21602214	2288	7807	£310.18	£372.22

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

VITA PLAN CONCEPT COMES IN RAL: A7016 ANTHRACITE GREY AND IS AVAILABLE FROM STOCK.





VITA COLUMN HORIZONTAL

Stelrad Vita Series

Perfect designs for both contemporary and traditional interiors, the Vita Column is available in a range of sizes that will see these beautiful radiators matching virtually any space in the home.

50 Δt

(75/65/20°C)

Height mm	Length mm	Elements	Columns	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
300	858	18	3	463002	576	1966	£190.69	£228.83
	1042	22	3	463003	704	2403	£222.48	£266.98
500	628	13	2	463012	499	1703	£127.13	£152.56
	858	18	2	463013	691	2358	£158.92	£190.70
	628	13	3	463017	671	2290	£139.85	£167.82
	858	18	3	463018	929	3171	£171.62	£205.94
	1042	22	3	463019	1135	3874	£235.19	£282.23
	1272	27	3	463020	1393	4754	£311.47	£373.76
600	628	13	2	463028	589	2010	£139.85	£167.82
	858	18	2	463029	815	2782	£158.92	£190.70
	1042	22	2	463030	997	3403	£203.41	£244.09
	1272	27	2	463031	1223	4174	£260.61	£312.73
	628	13	3	463033	792	2703	£152.55	£183.06
	858	18	3	463034	1096	3741	£177.98	£213.58
	1042	22	3	463035	1340	4573	£203.41	£244.09
	1272	27	3	463036	1644	5611	£273.33	£328.00
	628	13	4	463040	1037	3539	£158.92	£190.70
	858	18	4	463041	1436	4901	£203.41	£244.09
	1042	22	4	463042	1756	5993	£260.61	£312.73
	1272	27	4	463043	2155	7355	£311.47	£373.76

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

Floor mounting brackets are available, for more information see page 163.

UPGRADE TO A
VITA COLUMN
CONCEPT FROM

£75.25*

*based on 600 x 1272 x 4





VITA COLUMN CONCEPT

Stelrad Vita Series

Add a little colour to your home with the new Anthracite Grey radiator, it's the ideal choice if you want to be 'IN' fashion this season!
Available in a range of sizes to complement every room.

50 Δt

(75/65/20°C)

Height mm	Length mm	Elements	Columns	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
600	628	13	3	463133	792	2703	£227.80	£273.36
	858	18	3	463134	1096	3741	£253.23	£303.88
	1042	22	3	463135	1340	4573	£278.66	£334.39
	1272	27	3	463136	1644	5611	£348.58	£418.30
	628	13	4	463140	1037	3538	£234.17	£281.00
	858	18	4	463141	1436	4900	£278.66	£334.39
	1042	22	4	463142	1756	5990	£335.86	£403.03
	1272	27	4	463143	2155	7353	£386.72	£464.06

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

Floor mounting brackets are available, for more information see page 163.

VITA COLUMN CONCEPT COMES IN RAL: A7016 ANTHRACITE GREY AND IS AVAILABLE FROM STOCK.



A7016 Anthracite Grey



VITA COLUMN VERTICAL

 **Stelrad** Vita Series

The Vita Column Vertical provides a real style statement. Ideal for use in any minimalist project or where wall space is restricted.

50 Δt


(75/65/20°C)

Height mm	Length mm	Elements	Columns	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
1800	444	9	2	463055	1116	3809	£177.98	£213.58
2000	444	9	2	463057	1242	4239	£177.98	£213.58

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

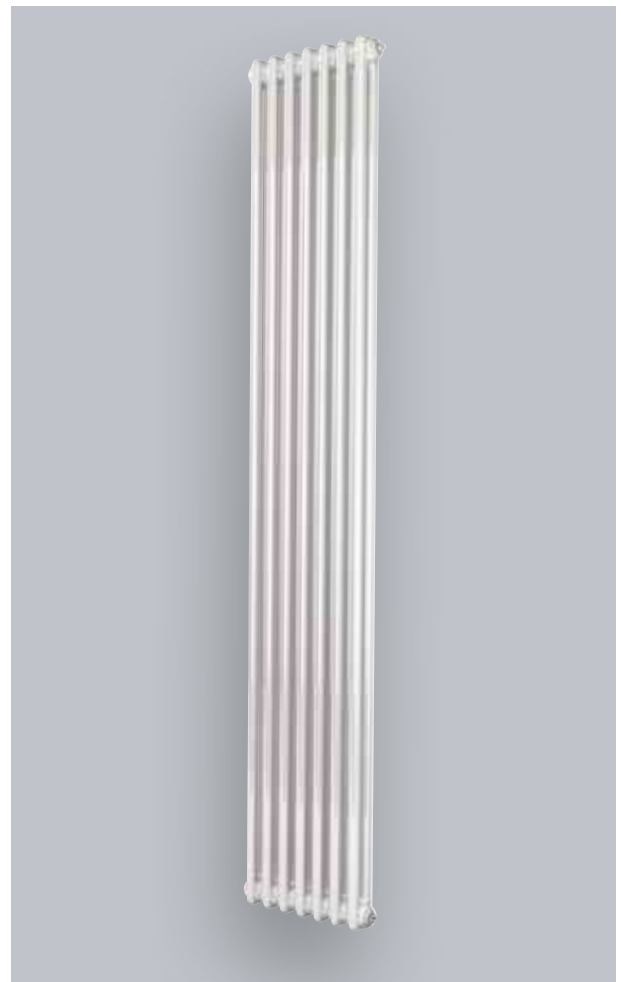



The Stelrad Vita Ultra radiator is ideal for those who are passionate about colour. Available in a range of bespoke finishes and optional towel rails, the Stelrad Vita Ultra is also perfectly suited for bathrooms and kitchens.

50 Δt

(75/65/20°C)

P+



K2



Front Panel Height mm	Emitter Height mm	Front Panel Length mm	Emitter Length mm	Stelrad UIN	Heat output Watts	Btu/h	Price excl VAT	Price incl VAT	Stelrad UIN	Heat output Watts	Btu/h	Price excl VAT	Price incl VAT
545	500	470	400	-	-	-	-	-	83502204	410	1398	£148.10	£177.72
		670	600	-	-	-	-	-	83502206	614	2096	£190.37	£228.44
		870	800	-	-	-	-	-	83502208	819	2795	£219.99	£263.99
		1070	1000	-	-	-	-	-	83502210	1024	3494	£253.88	£304.66
		1270	1200	-	-	-	-	-	83502212	1229	4193	£304.67	£365.60
		1470	1400	-	-	-	-	-	83502214	1434	4892	£392.45	£470.94
		1670	1600	-	-	-	-	-	83502216	1638	5590	£448.51	£538.21
		1870	1800	-	-	-	-	-	83502218	1843	6289	£504.57	£605.48
645	600	2070	2000	-	-	-	-	-	83502220	2048	6988	£772.18	£926.62
		470	400	83602104	474	1616	£149.38	£179.26	83602204	640	2184	£177.72	£213.26
		670	600	83602106	710	2424	£193.62	£232.34	83602206	961	3280	£228.46	£274.15
		870	800	83602108	947	3232	£237.87	£285.44	83602208	1281	4372	£264.05	£316.86
		1070	1000	83602110	1184	4040	£297.36	£356.83	83602210	1601	5464	£304.67	£365.60
		1270	1200	83602112	1421	4848	£356.78	£428.14	83602212	1921	6556	£365.55	£438.66
		1470	1400	83602114	1658	5656	£416.29	£499.55	83602214	2242	7649	£470.96	£565.15
		1670	1600	83602116	1894	6464	£475.78	£570.94	83602216	2563	8744	£538.21	£645.85
		1870	1800	83602118	2131	7272	£643.59	£772.31	83602218	2883	9836	£605.45	£726.54
		2070	2000	83602120	2368	8080	£707.22	£848.66	83602220	3203	10928	£926.64	£1,111.97

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

COLOUR OPTIONS



Please refer to page 164 for colour options.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

*Please note: Only the front fascia panel can be coloured. Emitter, top grille and side panels are black.

VITA ULTRA TOWEL RAIL BAR

Towel Rail Bar	Stelrad UIN	Price excl VAT	Price incl VAT
400mm wide	83100004	£70.98	£85.18
600mm wide	83100006	£83.62	£100.34
800mm wide	83100008	£96.41	£115.69
1000mm wide	83100010	£107.84	£129.41

Towel rail bar is 120mm wider than actual radiator.

For more information visit www.stelrad.com

OPTIONAL TOWEL RAIL CAN BE ADDED



A2003 Pastel Orange





VITA COMPACT VERTICAL


Stelrad Vita Series

A compact vertical with a compact price to match, the Vita Compact Vertical is a smart and stylish choice for a smaller space.

50 Δt

(75/65/20°C)

K2



Height mm	Length mm	Sections	Stelrad UIN	Watts	Heat output Btu/h	Price excl VAT	Price incl VAT
1800	400	12	89121418	1584	5405	£174.23	£209.08
	500	15	89122518	1980	6756	£191.53	£229.84
	600	18	89122618	2376	8107	£209.65	£251.58

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV NOW AVAILABLE

Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00
145317	Angled Right White	£50.00	£60.00
145318	Angled Right Chrome	£50.00	£60.00



UPGRADE TO A
VITA DECO
VERTICAL FROM

£66.90*

*based on 1800 x 400 K2





VITA DECO VERTICAL


Stelrad Vita Series

Designer style hits new heights with this sleek and elegant Vita Deco Vertical - the perfect premium quality choice for modern homes.

50 Δt

(75/65/20°C)

K2



Height mm	Length mm	Sections	Stelrad UIN	Watts	Heat output Btu/h	Price excl VAT	Price incl VAT
1800	400	12	89222418	1476	5036	£241.13	£289.36
	500	15	89222518	1845	6295	£264.97	£317.96
	600	18	89222618	2214	7554	£290.17	£348.20

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV NOW AVAILABLE

Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00
145317	Angled Right White	£50.00	£60.00
145318	Angled Right Chrome	£50.00	£60.00



UPGRADE TO A
VITA PLAN
VERTICAL FROM

£18.78*

*based on 1800 x 400 K2





VITA PLAN VERTICAL


Stelrad Vita Series

Minimalist styling with an understated flat finish, simply perfect. The Vita Plan Vertical will complement any space.

50 Δt

(75/65/20°C)

K2




Height mm	Length mm	Sections	Stelrad UIN	Watts	Heat output Btu/h	Price excl VAT	Price incl VAT
1800	400	12	89322418	1476	5036	£259.91	£311.89
	500	15	89322518	1845	6295	£288.20	£345.84
	600	18	89322618	2214	7554	£315.42	£378.50

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV NOW AVAILABLE

Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00
145317	Angled Right White	£50.00	£60.00
145318	Angled Right Chrome	£50.00	£60.00

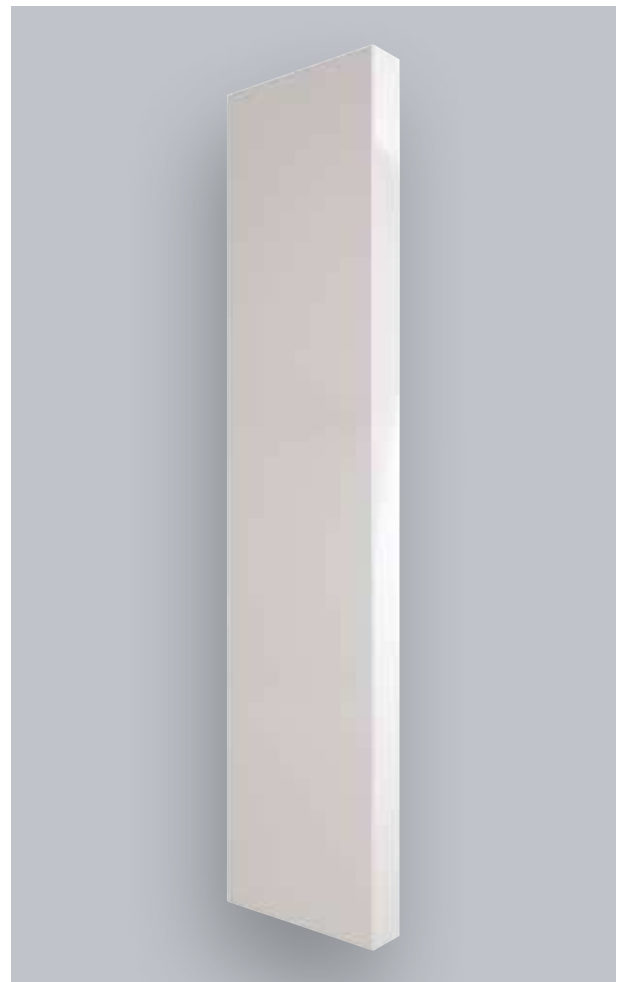



VITA COMPACT K3



The Vita Compact K3 provides a solution to homes needing additional heat from low energy systems. It's a stylish Compact K3 with a compact price to match.

50 Δt

(75/65/20°C)

K3



Height mm	Length mm	Sections	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
600	400	12	76603304	956	3262	£83.54	£100.25
	500	15	76603305	1195	4077	£96.94	£116.33
	600	18	76603306	1433	4889	£107.38	£128.86
	700	21	76603307	1672	5705	£116.94	£140.33
	800	24	76603308	1911	6520	£124.11	£148.93
	900	27	76603309	2150	7336	£134.24	£161.09
	1000	30	76603310	2389	8151	£143.20	£171.84
	1100	33	76603311	2628	8967	£157.50	£189.00
	1200	36	76603312	2867	9782	£171.82	£206.18
	1400	42	76603314	3345	11413	£221.34	£265.61

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.







KITCHEN AND BATHROOM COLLECTION

A radiator shouldn't just be functional - it should also add aesthetic appeal to any room. Combining dependable performance with designer styling, our Aqua Series offers you the best of both worlds. Choose from our Decorative and Designer Collections and discover the perfect radiator for your unique kitchen or bathroom.

AQUA SERIES

Decorative Collection

Slimline Towel Rail
Classic Towel Rail
STR (Stelrad Towel Radiator)
Caliente Rail
Caliente Curved Rail
Concord Rail
Esprit

Designer Collection

Vertical Ultra
Excel
Arc & Wave
Vistaline
Ellipse
Optia



SLIMLINE TOWEL RAIL

Stelrad Aqua Series

The Stelrad Slimline Towel Rail complements and completes the Aqua Series, with its chrome finish offering a slimline option at an affordable price.

50 Δt

(75/65/20°C)


STRAIGHT CHROME

Height mm	Length mm	Max Projection mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
650	400	100	148700	174	594	£71.81	£86.17
803	500	100	148701	236	806	£81.16	£97.39
	600	100	148702	268	915	£87.33	£104.80
1188	500	100	148703	345	1178	£97.88	£117.46
	600	100	148704	402	1372	£117.45	£140.94
1600	500	100	148705	467	1594	£144.65	£173.58
	600	100	148706	548	1870	£173.59	£208.31
1785	500	100	148707	524	1788	£180.41	£216.49
	600	100	148708	614	2095	£216.48	£259.78

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

TUBE DIMENSIONS





CLASSIC TOWEL RAIL

Stelrad Aqua Series

Stelrad's Classic Towel Rails offer stylish looks and effective heating and drying performance in any kitchen or bathroom. Available from stock in white, chrome, straight or curved.

50 Δt

(75/65/20°C)

STRAIGHT WHITE

STRAIGHT CHROME

Height mm	Length mm	Max Projection mm	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT
760	500	100	148070	376	1282	£106.76	£128.11	147002	246	839	£212.22	£254.66
	600	100	148071	445	1517	£108.13	£129.76	147003	294	1003	£221.55	£265.86
1211	500	100	148072	576	1964	£142.87	£171.44	147004	379	1292	£283.76	£340.51
	600	100	148073	686	2339	£146.96	£176.35	147005	453	1545	£301.69	£362.03
1744	500	100	148074	844	2878	£221.02	£265.22	142768	557	1899	£356.98	£428.38
	600	100	148075	1000	3410	£238.06	£285.67	142769	667	2274	£382.17	£458.60

CURVED WHITE

CURVED CHROME

Height mm	Length mm	Max Projection mm	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT
760	500	100	147006	376	1282	£136.03	£163.24	147012	246	839	£264.80	£317.76
	600	100	147007	445	1517	£144.63	£173.56	147013	294	1003	£290.15	£348.18
1211	500	100	147008	576	1964	£181.08	£217.30	147014	379	1292	£333.42	£400.10
	600	100	147009	686	2339	£222.48	£266.98	147015	453	1545	£341.62	£409.94
1744	500	100	147010	844	2878	£225.27	£270.32	147016	557	1899	£407.02	£488.42
	600	100	147011	1000	3410	£252.76	£303.31	147017	667	2274	£472.19	£566.63

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

CLASSIC MINI TOWEL RAIL

50 Δt

(75/65/20°C)

WHITE



CHROME

Height mm	Length mm	Max Projection mm	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT
678	400	100	147000	273	931	£79.45	£95.34	147001	175	597	£149.79	£179.75

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

TUBE DIMENSIONS

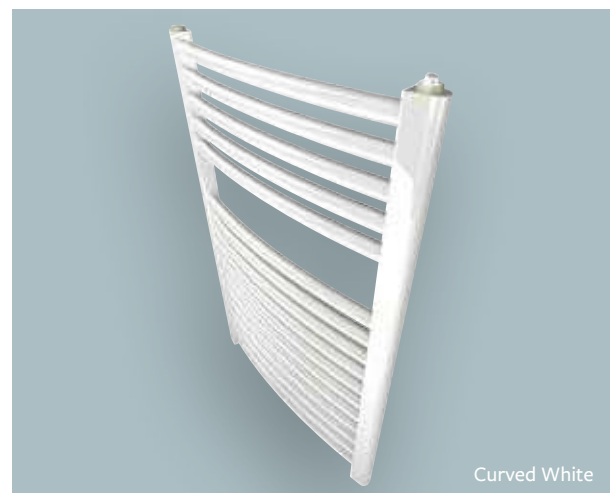

Curved White



STR (STELRAD TOWEL RADIATOR)

Stelrad Aqua Series

The simple design of the Stelrad Towel Radiator is the ultimate in neat, efficient functionality for towel warming and space heating. The superbly integrated unit allows towels and clothes to warm without interfering with the vital flow of convected room heat.

50 Δt

(75/65/20°C)

STR2

STR3

STR4

Height mm	Length mm	Sections	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT
645	425	12	140129	419	1430	£146.22	£175.46	-	-	-	-	-	-	-	-	-	-
	625	18	-	-	-	-	-	140130	611	2085	£185.93	£223.12	-	-	-	-	-
745	425	12	-	-	-	-	-	-	-	-	-	-	140022	475	1621	£150.78	£180.94

STR6

STR8

Height mm	Length mm	Sections	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT
745	625	18	140023	693	2365	£195.48	£234.58	-	-	-	-	-
	825	24	-	-	-	-	-	140024	922	3147	£231.25	£277.50

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.





Elegant tube on tube design consisting of a tight array of slim tubes makes the Stelrad Caliente Rail an easy choice for any bathroom or kitchen whether it's a modern, contemporary or period interior.

50 Δt

(75/65/20°C)

STRAIGHT SINGLE

Height mm	Lengths mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
755	450	407501450	389	1327	£256.47	£307.76
	500	407501500	431	1471	£262.15	£314.58
	600	407501600	517	1764	£273.49	£328.19
	750	407501750	645	2201	£294.77	£353.72
1199	450	401101450	615	2098	£296.37	£355.64
	500	401101500	675	2303	£304.63	£365.56
	600	401101600	794	2709	£320.95	£385.14
	750	401101750	972	3316	£350.41	£420.49
1791	450	401701450	900	3071	£349.16	£418.99
	500	401701500	986	3364	£361.09	£433.31
	600	401701600	1158	3951	£391.91	£470.29
	750	401701750	1416	4831	£433.70	£520.44
2013	450	402001450	1002	3419	£369.95	£443.94
	500	402001500	1099	3750	£390.47	£468.56
	600	402001600	1294	4415	£417.56	£501.07
	750	402001750	1586	5411	£464.45	£557.34

STRAIGHT DOUBLE

Height mm	Lengths mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
755	450	407502450	552	1883	£325.16	£390.19
	500	407502500	616	2102	£335.02	£402.02
	600	407502600	748	2552	£355.04	£426.05
	750	407502750	947	3231	£389.69	£467.63
1199	450	401102450	868	2962	£392.62	£471.14
	500	401102500	963	3286	£416.70	£500.04
	600	401102600	1154	3937	£446.92	£536.30
	750	401102750	1441	4917	£497.57	£597.08
1791	450	401702450	1268	4326	£490.30	£588.36
	500	401702500	1402	4784	£513.77	£616.52
	600	401702600	1670	5698	£557.47	£668.96
	750	401702750	2073	7073	£653.97	£784.76
2013	450	402002450	1427	4869	£527.74	£633.29
	500	402002500	1576	5377	£553.98	£664.78
	600	402002600	1874	6394	£627.64	£753.17
	750	402002750	2321	7919	£708.18	£849.82

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).


For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV NOW AVAILABLE

Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00
145317	Angled Right White	£50.00	£60.00
145318	Angled Right Chrome	£50.00	£60.00



TUBE DIMENSIONS



COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 164 for colour options.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For more information on colour radiator prices please contact your local merchant.





ML130 Blue Grey

CALIENTE CURVED RAIL

Stelrad Aqua Series

The stylish Stelrad Caliente Curved Rail will complement your bathroom or en-suite whatever the décor.

50 Δt

(75/65/20°C)

CURVED SINGLE

Height mm	Lengths mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
1199	496	401101496	675	2303	£416.71	£500.05
	595	401101595	794	2709	£446.92	£536.30
1791	496	401701496	986	3364	£513.77	£616.52
	595	401701595	1158	3951	£557.46	£668.95
2013	496	402001496	1099	3750	£553.98	£664.78
	595	402001595	1294	4415	£627.64	£753.17

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).


For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV NOW AVAILABLE

Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00
145317	Angled Right White	£50.00	£60.00
145318	Angled Right Chrome	£50.00	£60.00



TUBE DIMENSIONS



COLOUR OPTIONS




Comes in White as standard (RAL 9016).

Please refer to page 164 for colour options.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For more information on colour radiator prices please contact your local merchant.

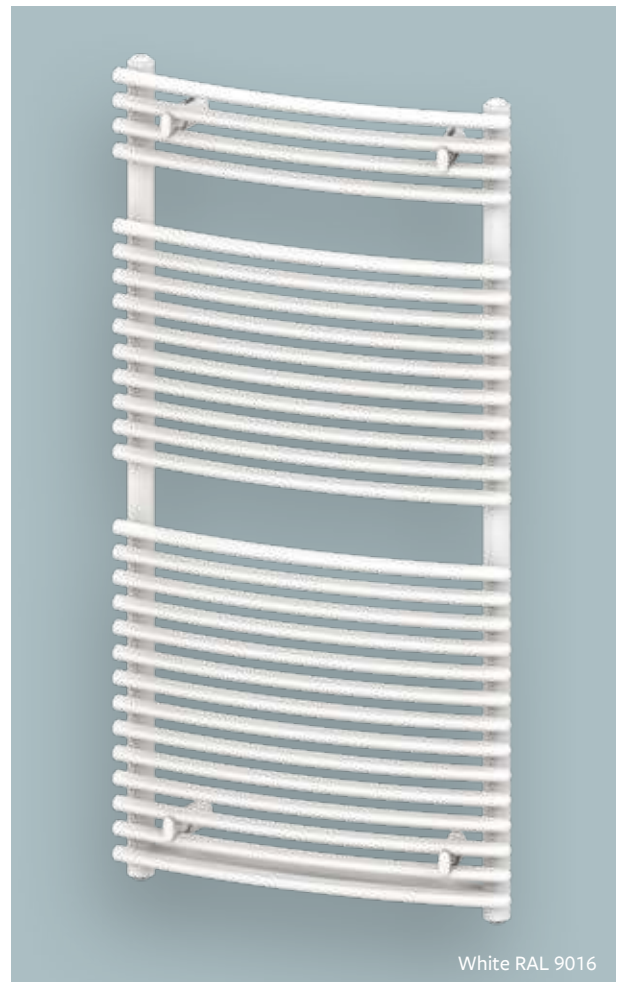

White RAL 9016





The Stelrad Concord Rail offers a stunning alternative to tubular towel rails, with its flat tube on tube. Offering visual appeal combined with advanced technology, the Stelrad Concord Rail provides a contemporary solution for a wide range of building applications.

50 Δt

(75/65/20°C)

STRAIGHT SINGLE

Height mm	Length mm	Tap centres	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
731	450	400	148581	342	1167	£288.70	£346.44
	600	550	148582	447	1525	£304.95	£365.94
1186	450	400	148583	530	1808	£365.16	£438.19
	600	550	148584	694	2368	£390.67	£468.80
1511	450	400	148585	666	2272	£417.61	£501.13
	600	550	148586	869	2965	£455.26	£546.31
1771	450	400	148587	777	2651	£472.47	£566.96
	600	550	148588	1010	3446	£509.79	£611.75

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).


For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV NOW AVAILABLE

Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00
145317	Angled Right White	£50.00	£60.00
145318	Angled Right Chrome	£50.00	£60.00



TUBE DIMENSIONS



COLOUR OPTIONS



Comes in White as standard (RAL 9016). Please refer to page 164 for colour options.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For more information on colour radiator prices please contact your local merchant.



A7001 Silver Grey



Elegant and ultra slim, the Stelrad Esprit is a beautifully stylish range of radiators that's great for space saving and it looks simply stunning.

50 Δt

(75/65/20°C)

STRAIGHT WHITE

STRAIGHT CHROME

Height mm	Length mm	Max Projection mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT	Max Projection mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
900	450	100	148049	405	1382	£339.25	£407.10	100	148053	316	1079	£717.83	£861.40
1200	450	100	148050	554	1891	£392.63	£471.16	100	148054	432	1474	£846.21	£1,015.45
1200	550	100	148051	676	2307	£404.17	£485.00	100	148055	527	1799	£874.62	£1,049.54
1800	550	100	148052	1056	3604	£550.29	£660.35	100	148056	824	2812	£1,229.12	£1,474.94

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

CURVED WHITE


CURVED CHROME

Height mm	Length mm	Max Projection mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT	Max Projection mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
900	550	75	148057	452	1543	£445.33	£534.40	75	148061	384	1311	£904.11	£1,084.93
1200	550	75	148058	676	2307	£506.46	£607.75	75	148062	527	1799	£1,031.36	£1,237.63
1500	550	75	148059	860	2935	£603.01	£723.61	75	148063	671	2290	£1,247.66	£1,497.19
1800	550	75	148060	1056	3604	£660.25	£792.30	75	148064	824	2812	£1,374.56	£1,649.47

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

TUBE DIMENSIONS





Outstanding performance and the beautiful design of the Stelrad Vertical Ultra elevates any room. Available in a range of bespoke colour finishes, and optional towel rails, the Vertical Ultra is perfectly suited for bathrooms and kitchens.

50 Δt

(75/65/20°C)

VERTICAL ULTRA

Front Panel Height mm	Emitter Height mm	Front Panel Length mm	Emitter Length mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
1040	1000	470	400	86110224	857	2924	£426.13	£511.36
		570	500	86110225	1071	3654	£459.19	£551.03
		670	600	86110226	1285	4384	£533.38	£640.06
1240	1200	470	400	86112224	999	3409	£431.13	£517.36
		570	500	86112225	1249	4262	£518.35	£622.02
		670	600	86112226	1499	5115	£597.35	£716.82
1840	1800	470	400	86118224	1476	5036	£558.94	£670.73
		570	500	86118225	1845	6295	£652.08	£782.50
		670	600	86118226	2214	7554	£726.60	£871.92
2040	2000	470	400	86120224	1584	5405	£579.40	£695.28
		570	500	86120225	1980	6756	£668.83	£802.60
		670	600	86120226	2376	8107	£736.10	£883.32

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV NOW AVAILABLE

Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00
145317	Angled Right White	£50.00	£60.00
145318	Angled Right Chrome	£50.00	£60.00



Towel Rail Bar	Stelrad UIN	Price excl VAT	Price incl VAT
400mm wide	83200004	£62.62	£75.14
500mm wide	83200005	£68.14	£81.77
600mm wide	83200006	£73.78	£88.54

Towel rail bar is 120mm wider than actual radiator.
Optional towel rails can be added.

For more information visit www.stelrad.com

COLOUR OPTIONS

Please refer to page 164 for colour options.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

NB: When choosing a colour only the front fascia panel can be coloured. Where the product is 1000mm and 1200mm, the emitter, top grille and side panels are black. If the product is 1800mm and 2000mm, the emitter, top grille and side panels are white.





The Excel is a practical and stylish lattice design radiator for domestic or commercial applications.

50 Δt


(75/65/20°C)

WALL MOUNTED

Height mm	Length mm	Max Projection mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
1800	380	60	147040	727	2481	£665.03	£798.04
	500	60	147075	957	3266	£765.75	£918.90
2000	500	60	147110	1048	3577	£832.37	£998.84

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

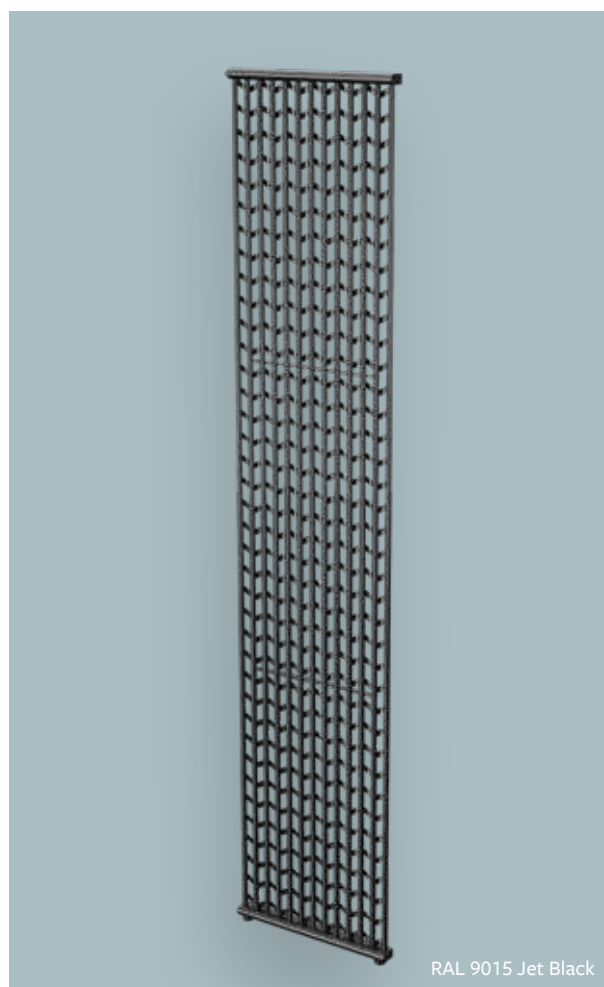

RAL 9015 Jet Black



Wave BR0007 Satin Metal Grey

Precision curved, fine tubes define the elegant lines of the Arc and Wave, make spaces that little bit more special and create a clear style statement for any living space.

50 Δt

(75/65/20°C)

ARC


Height mm	Length mm	Max Projection mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
1800	380	200	147037	882	3010	£522.40	£626.88
	440	200	147038	1021	3485	£548.20	£657.84
	620	200	147039	1438	4908	£681.96	£818.35

WAVE

Height mm	Length mm	Max Projection mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
1800	380	200	147034	882	3010	£582.84	£699.41
	440	200	147035	1021	3485	£615.90	£739.08
	620	200	147036	1438	4908	£749.68	£899.62

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

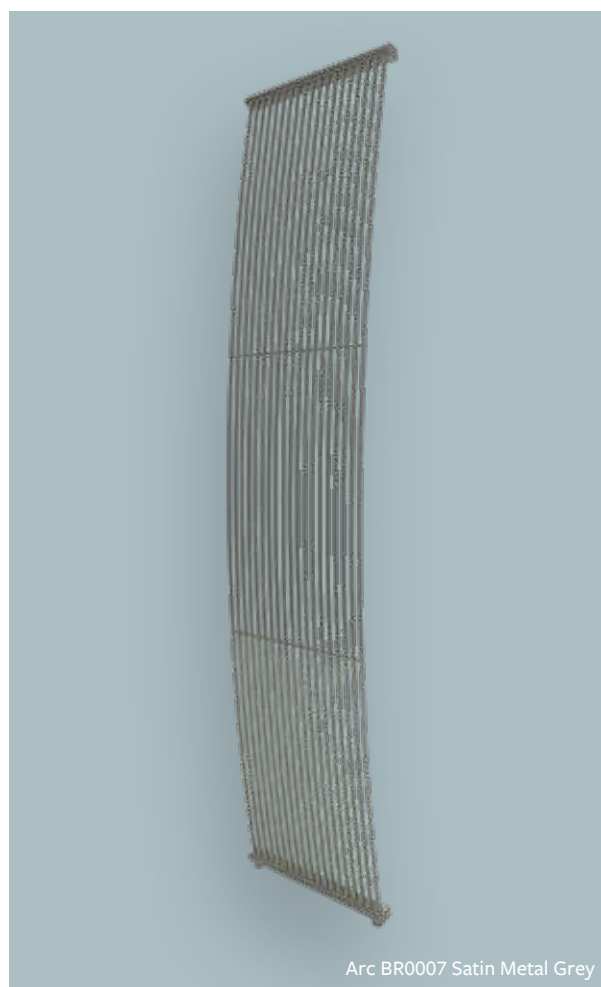

Arc BR0007 Satin Metal Grey







The tightly aligned slim tubes of the Stelrad Vistaline don't just look great, they also deliver a superb heating performance. Available with tubes in a single or staggered double row for maximum output flexibility, and in a wide range of colours.

50 Δt

(75/65/20°C)

SINGLE ROW


Height mm	Length mm	Max Projection mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
1800	320	60	147250	742	2532	£302.38	£362.86
	440	60	147285	1021	3485	£344.43	£413.32
	620	60	147320	1438	4908	£445.89	£535.07
2000	500	60	147355	1275	4352	£397.62	£477.14
	620	60	147390	1580	5393	£482.83	£579.40
	740	60	147425	1886	6437	£568.88	£682.66

DOUBLE OFFSET ROW


Height mm	Length mm	Max Projection mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
1800	320	60	147460	818	2792	£380.85	£457.02
	440	60	147495	1130	3857	£454.35	£545.22
	620	60	147530	1597	5451	£609.34	£731.21
2000	500	60	147565	1415	4829	£544.47	£653.36
	620	60	147600	1758	6000	£662.02	£794.42

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.


COLOUR OPTIONS



Comes in White as standard (RAL 9016).
Please refer to page 165 for colour options.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For more information on colour radiator prices please contact your local merchant.

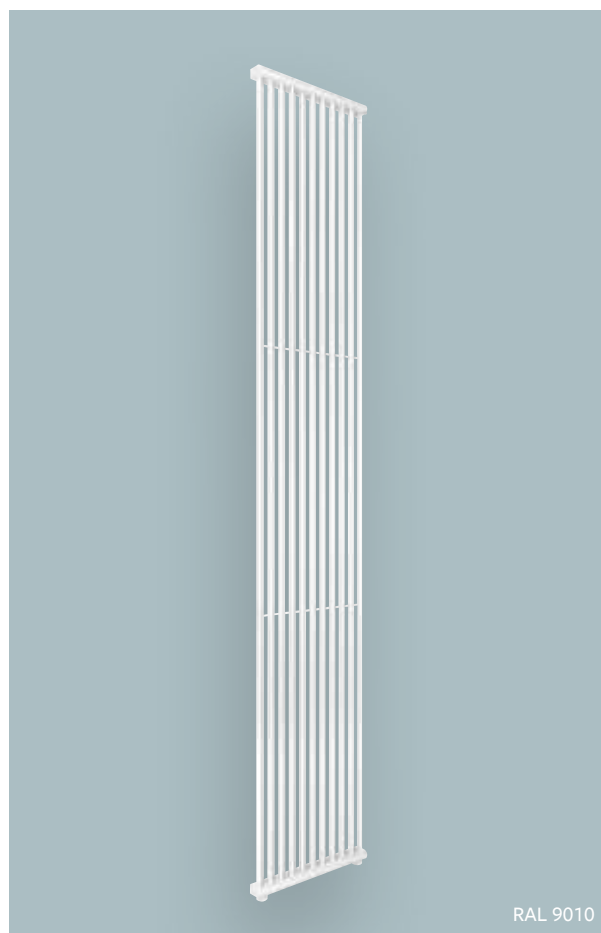

RAL 9010





Vertical C shaped tubes in inward or outward facing columns give the Stelrad Ellipse a distinctive look and make it a feature in any room. The large capacity of the tubes also delivers outstanding heating performance. Available in a wide range of colours.

50 Δt

(75/65/20°C)



EH

INWARD FACING COLUMNS

Height mm	Length mm	Max Projection mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
1800	459	65	147635	858	2928	£349.57	£419.48
	689	65	147670	1287	4393	£453.84	£544.61
2000	459	65	147705	954	3256	£362.97	£435.56
	689	65	147740	1431	4884	£471.13	£565.36
	765	65	147775	1590	5427	£507.03	£608.44



EOH

OUTWARD FACING COLUMNS

Height mm	Length mm	Max Projection mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
1800	459	65	147810	858	2928	£394.11	£472.93
	689	65	147845	1287	4393	£497.97	£597.56
2000	459	65	147880	954	3256	£407.88	£489.46
	689	65	147915	1431	4884	£516.03	£619.24
	765	65	147950	1590	5427	£551.22	£661.46

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.


COLOUR OPTIONS



Comes in White as standard (RAL 9016).
Please refer to page 165 for colour options.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For more information on colour radiator prices please contact your local merchant.

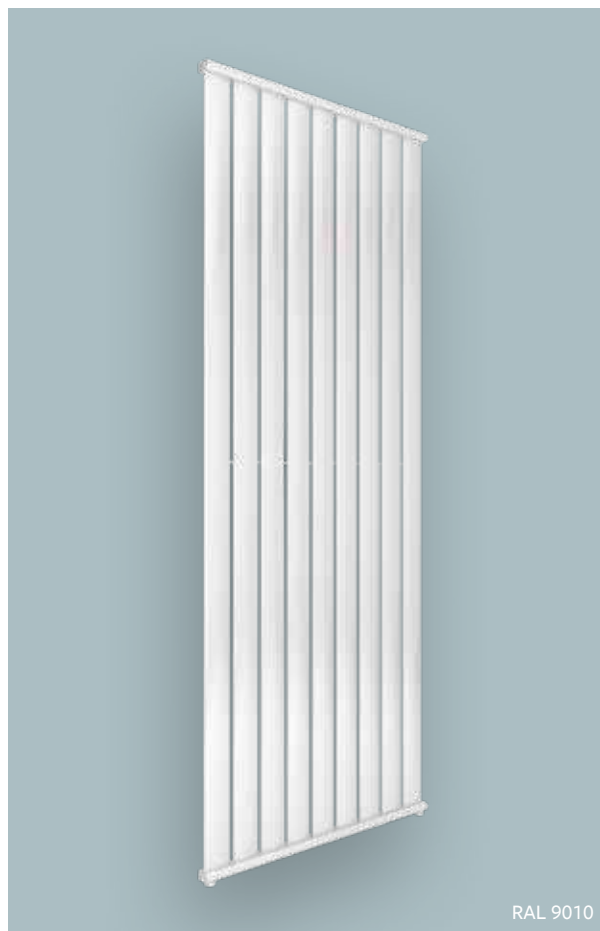

RAL 9010





BR0007 Satin Metal Grey

Pietro Facheris' iconic design, affectionately known as the 'boat', delivers excellent heat output and cleverly integrated towel stacking spaces. Available in three lengths, and finished in cool metallic grey.

50 Δt

(75/65/20°C)


Height mm	Length mm	Max Projection mm	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
1800	160	202	147985	742	2532	£923.75	£1,108.50
	200	242	147986	928	3167	£990.54	£1,188.65
	240	282	147987	1114	3802	£1,055.42	£1,266.50

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV NOW AVAILABLE

Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00
145317	Angled Right White	£50.00	£60.00
145318	Angled Right Chrome	£50.00	£60.00

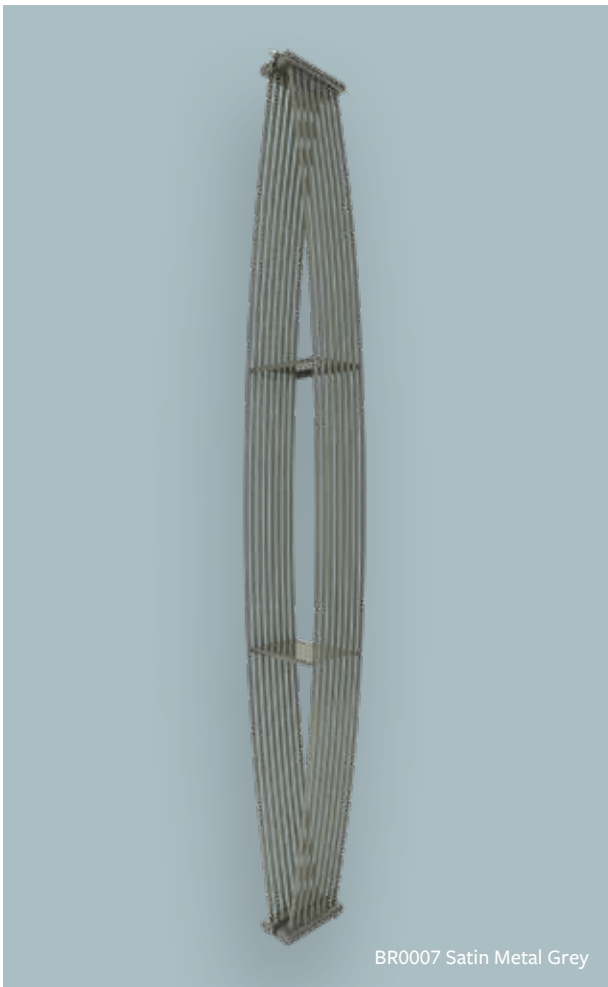

BR0007 Satin Metal Grey





CURVED COLLECTION

Compact and with a beautifully curved top grille and end panels, the designer looks of the Softline range give you extra choice and flexibility for domestic and commercial applications.

SOFTLINE SERIES

Softline Compact

Softline Deco

NEW Softline Deco Concept

Softline Plan

NEW Softline Plan Concept

NEW Softline Column Horizontal

NEW Softline Column Concept

NEW Softline Column Vertical

Softline Compact Vertical

Softline Deco Vertical

Softline Plan Vertical

Softline Compact K3


Curved top grille and end panels



WHY NOT UPGRADE?

SOFTLINE PLAN

from **£65.77**
exc. VAT.*

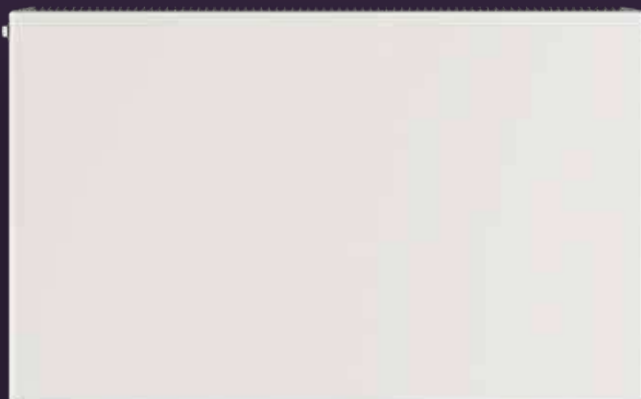


**UPGRADE TO A
SOFTLINE PLAN
FROM £21.15**



SOFTLINE DECO


from **£44.62**
exc. VAT.*

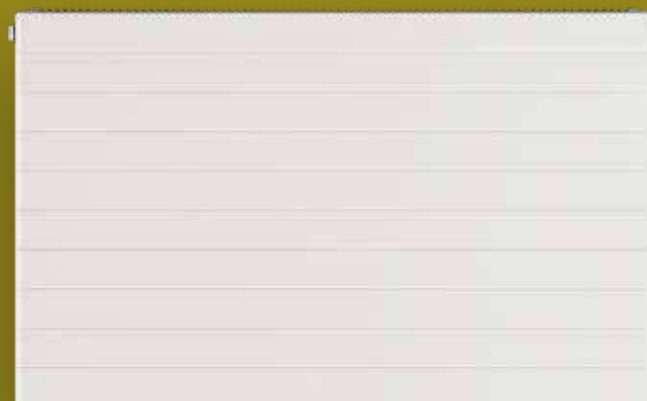

**UPGRADE TO A
SOFTLINE DECO
FROM £8.51**



**SOFTLINE
COMPACT**
from **£36.11**
exc. VAT.*

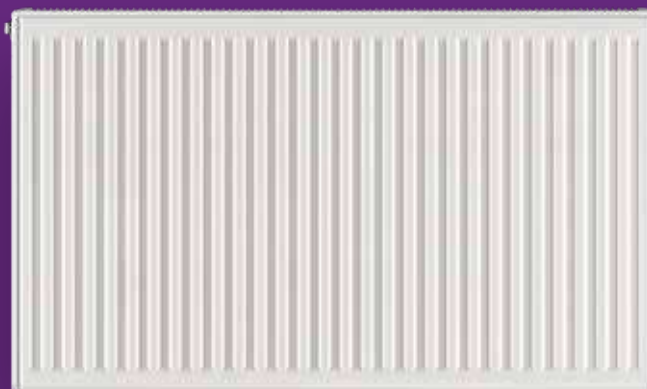

All our Softline Series premium panel radiators have the same lugs and brackets plus all the same easy installation features that make them the UK's No.1 choice.

SOFTLINE COMPACT VERTICAL

from **£200.26** exc. VAT.**



SOFTLINE DECO VERTICAL

from **£267.92** exc. VAT.**



SOFTLINE PLAN VERTICAL

from **£288.78** exc. VAT.**



**UPGRADE TO A
SOFTLINE DECO
VERTICAL FROM
£67.66**



**UPGRADE TO A
SOFTLINE PLAN
VERTICAL FROM
£20.86**



**Based on 1800 x 400 K2




SOFTLINE COMPACT

Stelrad Softline Series

With smooth curved edges the Stelrad Softline Compact radiator is a stylish addition to any home. Choose from a wide range of sizes and fit a designer radiator from the UK's market leading brand.

50 Δt

(75/65/20°C)



Height mm	Length mm	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat output Watts	Btu/hr	Price excl VAT	Price incl VAT
300	500	80301105	255	870	£36.11	£43.33	-	-	-	-	-	80302205	491	1676	£52.45	£62.94
	1000	80301110	509	1737	£64.45	£77.34	-	-	-	-	-	80302210	982	3352	£94.34	£113.21
	1500	80301115	764	2608	£96.81	£116.17	-	-	-	-	-	80302215	1473	5027	£141.59	£169.91
	2000	80301120	1018	3474	£124.47	£149.36	-	-	-	-	-	80302220	1964	6703	£188.86	£226.63
450	400	80451104	302	1031	£35.15	£42.18	-	-	-	-	-	80452204	548	1870	£48.31	£57.97
	500	80451105	378	1290	£39.16	£46.99	-	-	-	-	-	80452205	686	2341	£58.58	£70.30
	600	80451106	454	1550	£44.16	£52.99	-	-	-	-	-	80452206	823	2809	£69.40	£83.28
	700	80451107	529	1805	£48.69	£58.43	-	-	-	-	-	80452207	960	3276	£80.45	£96.54
	800	80451108	605	2065	£52.56	£63.07	-	-	-	-	-	80452208	1097	3744	£90.72	£108.86
	900	80451109	680	2321	£57.36	£68.83	-	-	-	-	-	80452209	1234	4212	£102.07	£122.48
	1000	80451110	756	2580	£63.77	£76.52	80452110	1055	3601	£92.96	£111.55	80452210	1371	4679	£113.48	£136.18
	1100	80451111	832	2840	£70.21	£84.25	80452111	1161	3962	£102.28	£122.74	80452211	1508	5147	£124.85	£149.82
	1200	80451112	907	3096	£76.58	£91.90	80452112	1266	4321	£111.59	£133.91	80452212	1645	5614	£136.19	£163.43
	1400	80451114	1058	3611	£89.41	£107.29	80452114	1477	5041	£130.19	£156.23	80452214	1919	6550	£158.96	£190.75
	1600	80451116	1210	4130	£102.23	£122.68	80452116	1688	5761	£148.80	£178.56	80452216	2194	7488	£181.76	£218.11
	1800	80451118	1361	4645	£115.06	£138.07	-	-	-	-	-	80452218	2468	8423	£204.52	£245.42
	2000	80451120	1512	5160	£127.87	£153.44	-	-	-	-	-	80452220	2742	9358	£227.24	£272.69
600	400	80601104	392	1338	£40.51	£48.61	80602104	538	1836	£54.49	£65.39	80602204	693	2365	£60.07	£72.08
	500	80601105	490	1672	£46.42	£55.70	80602105	673	2297	£65.18	£78.22	80602205	866	2956	£72.82	£87.38
	600	80601106	588	2007	£52.02	£62.42	80602106	807	2754	£74.92	£89.90	80602206	1039	3546	£86.33	£103.60
	700	80601107	686	2341	£58.70	£70.44	80602107	942	3215	£85.00	£102.00	80602207	1212	4137	£100.10	£120.12
	800	80601108	784	2676	£65.22	£78.26	80602108	1076	3672	£97.55	£117.06	80602208	1386	4730	£113.74	£136.49
	900	80601109	882	3010	£73.78	£88.54	80602109	1211	4133	£109.93	£131.92	80602209	1559	5321	£127.14	£152.57
	1000	80601110	980	3345	£82.36	£98.83	80602110	1345	4590	£122.30	£146.76	80602210	1732	5911	£143.21	£171.85
	1100	80601111	1078	3679	£90.97	£109.16	80602111	1480	5051	£133.28	£159.94	80602211	1905	6502	£155.49	£186.59
	1200	80601112	1176	4014	£99.55	£119.46	80602112	1614	5509	£147.09	£176.51	80602212	2078	7092	£172.72	£207.26
	1400	80601114	1372	4683	£117.91	£141.49	80602114	1883	6427	£169.67	£203.60	80602214	2425	8277	£202.33	£242.80
	1600	80601116	1568	5352	£129.47	£155.36	80602116	2152	7345	£193.96	£232.75	80602216	2771	9457	£226.41	£271.69
	1800	80601118	1764	6021	£145.69	£174.83	-	-	-	-	-	80602218	3118	10642	£254.78	£305.74
	2000	80601120	1960	6689	£161.95	£194.34	-	-	-	-	-	80602220	3464	11823	£281.05	£337.26
700	400	80701104	447	1526	£48.94	£58.73	-	-	-	-	-	80702204	784	2676	£69.12	£82.94
	500	80701105	559	1908	£55.04	£66.05	-	-	-	-	-	80702205	981	3348	£83.87	£100.64
	600	80701106	670	2287	£61.78	£74.14	-	-	-	-	-	80702206	1177	4017	£99.45	£119.34
	700	80701107	782	2669	£69.14	£82.97	-	-	-	-	-	80702207	1373	4686	£115.37	£138.44
	800	80701108	894	3051	£75.85	£91.02	-	-	-	-	-	80702208	1569	5355	£130.17	£156.20
	900	80701109	1005	3430	£85.33	£102.40	-	-	-	-	-	80702209	1765	6024	£146.51	£175.81
	1000	80701110	1117	3812	£94.89	£113.87	-	-	-	-	-	80702210	1961	6693	£162.84	£195.41
	1100	80701111	1229	4195	£104.44	£125.33	-	-	-	-	-	80702211	2157	7362	£179.16	£214.99
	1200	80701112	1340	4573	£113.94	£136.73	-	-	-	-	-	80702212	2353	8031	£195.51	£234.61
	1400	80701114	1564	5338	£133.02	£159.62	-	-	-	-	-	80702214	2745	9369	£228.17	£273.80
	1600	80701116	1787	6099	£152.06	£182.47	-	-	-	-	-	80702216	3138	10710	£260.88	£313.06
	1800	80701118	2011	6864	£171.19	£205.43	-	-	-	-	-	80702218	3530	12048	£293.55	£352.26
	2000	80701120	2234	7625	£190.21	£228.25	-	-	-	-	-	80702220	3922	13386	£326.21	£391.45

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.



UPGRADE TO A
SOFTLINE DECO
FROM

£8.51*

*based on 300 x 500 K1



The Stelrad Softline Deco is the epitome of minimalist, contemporary design. With a premium exterior look and Stelrad manufacturing quality inside, it's a clear choice for the interior-conscious homeowner.

50 Δt

(75/65/20°C)

K1



K2



Height mm	Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
300	500	84301105	235	802	£44.62	£53.54	84302205	449	1532	£66.52	£79.82
	1000	84301110	470	1604	£72.82	£87.38	84302210	898	3064	£115.75	£138.90
	1500	84301115	705	2405	£103.58	£124.30	84302215	1347	4596	£177.83	£213.40
450	400	84451104	272	928	£45.57	£54.68	84452204	509	1737	£72.39	£86.87
	600	84451106	409	1396	£53.15	£63.78	84452206	764	2607	£93.07	£111.68
	800	84451108	545	1860	£70.86	£85.03	84452208	1018	3473	£107.53	£129.04
	1000	84451110	681	2324	£88.57	£106.28	84452210	1273	4343	£124.08	£148.90
	1200	84451112	817	2788	£106.29	£127.55	84452212	1528	5214	£148.91	£178.69
	1400	84451114	953	3252	£124.02	£148.82	84452214	1782	6080	£191.81	£230.17
	1600	84451116	1090	3719	£141.74	£170.09	84452216	2037	6950	£219.20	£263.04
600	1800	84451118	1226	4183	£173.11	£207.73	84452218	2291	7817	£246.63	£295.96
	400	84601104	348	1187	£49.69	£59.63	84602204	640	2184	£78.97	£94.76
	600	84601106	522	1781	£57.99	£69.59	84602206	961	3279	£101.51	£121.81
	800	84601108	696	2375	£77.30	£92.76	84602208	1281	4371	£117.33	£140.80
	1000	84601110	870	2968	£96.63	£115.96	84602210	1601	5463	£135.39	£162.47
	1200	84601112	1044	3562	£115.95	£139.14	84602212	1921	6554	£162.43	£194.92
	1400	84601114	1218	4156	£135.29	£162.35	84602214	2241	7646	£209.27	£251.12
	1600	84601116	1392	4750	£154.62	£185.54	84602216	2562	8742	£239.14	£286.97
	1800	84601118	1566	5343	£188.83	£226.60	84602218	2882	9833	£269.03	£322.84
	2000	84601120	1740	5937	£193.70	£232.44	84602220	3202	10925	£411.75	£494.10

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

UPGRADE TO A
SOFTLINE PLAN
FROM

£21.15*

*based on a 300 x 500 K1





NEW SOFTLINE DECO CONCEPT Stelrad® Softline Series

The outstanding quality of Stelrad manufacturing on the inside, a classy, contemporary Anthracite Grey finish on the outside. The smart minimalist looks of the Softline Deco Concept make this a must-have radiator for stylish homes.

50 Δt

(75/65/20°C)

K1



K2



Height mm	Length mm	Stelrad UIN	Heat output		Price excl VAT	Price incl VAT	Stelrad UIN	Heat output		Price excl VAT	Price incl VAT
600	400	24601104	348	1187	£119.69	£143.63	24602204	640	2184	£148.97	£178.76
	600	24601106	522	1781	£127.99	£153.59	24602206	961	3279	£171.51	£205.81
	800	24601108	696	2375	£147.30	£176.76	24602208	1281	4371	£187.33	£224.80
	1000	24601110	870	2968	£166.63	£199.96	24602210	1601	5463	£205.39	£246.47
	1200	24601112	1044	3562	£185.95	£223.14	24602212	1921	6554	£232.43	£278.92
	1400	24601114	1218	4156	£205.29	£246.35	24602214	2241	7646	£279.27	£335.12

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

SOFTLINE DECO CONCEPT COMES IN RAL: A7016 ANTHRACITE GREY AND IS AVAILABLE FROM STOCK.



A7016 Anthracite Grey



It's the ultimate in minimalism for radiators as the slim profile of the Stelrad Softline Plan is an attractive addition to any space - simplicity at its best. The Softline Plan is proof that a radiator can be good looking as well as functional and extremely cost effective.

50 Δt

(75/65/20°C)

K1




K2



Height mm	Length mm	Stelrad UIN	Heat output		Price excl VAT	Price incl VAT	Stelrad UIN	Heat output		Price excl VAT	Price incl VAT
			Watts	Btu/hr				Watts	Btu/hr		
300	500	85301105	235	802	£65.77	£78.92	85302205	465	1587	£98.03	£117.64
	1000	85301110	469	1600	£107.31	£128.77	85302210	929	3170	£170.58	£204.70
	1500	85301115	704	2402	£152.63	£183.16	85302215	1394	4756	£262.06	£314.47
450	400	85451104	280	955	£67.13	£80.56	85452204	518	1767	£106.68	£128.02
	600	85451106	421	1436	£78.34	£94.01	85452206	778	2655	£137.15	£164.58
	800	85451108	561	1914	£104.44	£125.33	85452208	1037	3538	£158.47	£190.16
	1000	85451110	701	2392	£130.53	£156.64	85452210	1296	4422	£182.87	£219.44
	1200	85451112	841	2869	£156.64	£187.97	85452212	1555	5306	£219.45	£263.34
	1400	85451114	981	3347	£182.77	£219.32	85452214	1814	6189	£282.67	£339.20
	1600	85451116	1122	3828	£208.87	£250.64	85452216	2074	7076	£323.05	£387.66
	1800	85451118	1262	4306	£255.12	£306.14	85452218	2333	7960	£363.46	£436.15
600	400	85601104	364	1242	£73.22	£87.86	85602204	654	2231	£116.38	£139.66
	600	85601106	547	1866	£85.46	£102.55	85602206	980	3344	£149.59	£179.51
	800	85601108	729	2487	£113.92	£136.70	85602208	1307	4459	£172.90	£207.48
	1000	85601110	911	3108	£142.39	£170.87	85602210	1634	5575	£199.50	£239.40
	1200	85601112	1093	3729	£170.87	£205.04	85602212	1961	6691	£239.38	£287.26
	1400	85601114	1275	4350	£199.38	£239.26	85602214	2288	7807	£308.41	£370.09
	1600	85601116	1458	4975	£227.86	£273.43	85602216	2614	8919	£352.44	£422.93
	1800	85601118	1640	5596	£278.30	£333.96	85602218	2941	10035	£396.48	£475.78
	2000	85601120	1822	6217	£285.46	£342.55	85602220	3268	11150	£606.79	£728.15

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

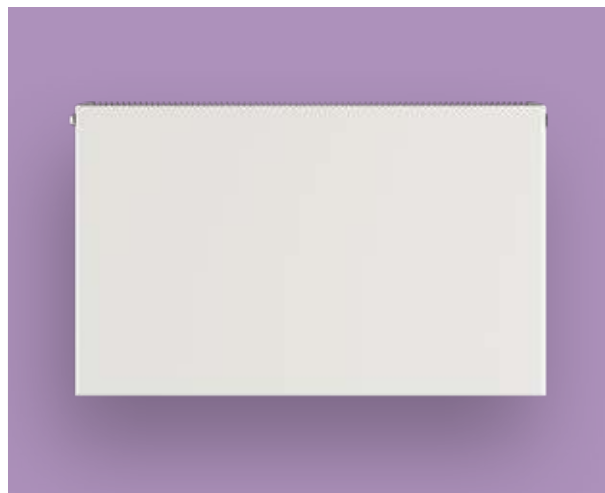



NEW SOFTLINE PLAN CONCEPT Stelrad® Softline Series

Slim and softly curved, the simple, sophisticated looks of the Softline Plan Concept radiator add a subtle dash of colour to a classic minimalist design, with an attractive Anthracite Grey finish. Style and quality in perfect harmony.

50 Δt

(75/65/20°C)

K1



K2



Height mm	Length mm	Stelrad UIN	Heat output		Price excl VAT	Price incl VAT	Stelrad UIN	Heat output		Price excl VAT	Price incl VAT
600	400	25601104	364	1242	£143.22	£171.86	25602204	654	2231	£186.38	£223.66
	600	25601106	547	1866	£155.46	£186.55	25602206	980	3344	£219.59	£263.51
	800	25601108	729	2487	£183.92	£220.70	25602208	1307	4459	£242.90	£291.48
	1000	25601110	911	3108	£212.39	£254.87	25602210	1634	5575	£269.50	£323.40
	1200	25601112	1093	3729	£240.87	£289.04	25602212	1961	6691	£309.38	£371.26
	1400	25601114	1275	4350	£269.38	£323.26	25602214	2288	7807	£378.41	£454.09

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

SOFTLINE PLAN CONCEPT COMES IN RAL: A7016 ANTHRACITE GREY AND IS AVAILABLE FROM STOCK.





NEW SOFTLINE COLUMN HORIZONTAL

Stelrad® Softline Series

Perfect designs for both contemporary and traditional interiors, the Softline Column is available in a range of sizes that will see these beautiful radiators matching virtually any space in the home.

50 Δt

(75/65/20°C)

Height mm	Length mm	Elements	Columns	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
300	858	18	3	563002	576	1966	£195.00	£234.00
	1042	22	3	563003	704	2403	£225.00	£270.00
500	628	13	2	563012	499	1703	£130.00	£156.00
	858	18	2	563013	691	2358	£160.00	£192.00
	628	13	3	563017	671	2290	£140.00	£168.00
	858	18	3	563018	929	3171	£175.00	£210.00
	1042	22	3	563019	1135	3874	£235.00	£282.00
	1272	27	3	563020	1393	4754	£315.00	£378.00
600	628	13	2	563028	589	2010	£140.00	£168.00
	858	18	2	563029	815	2782	£160.00	£192.00
	1042	22	2	563030	997	3403	£205.00	£246.00
	1272	27	2	563031	1223	4174	£265.00	£318.00
	628	13	3	563033	792	2703	£155.00	£186.00
	858	18	3	563034	1096	3741	£180.00	£216.00
	1042	22	3	563035	1340	4573	£205.00	£246.00
	1272	27	3	563036	1644	5611	£275.00	£330.00
	628	13	4	563040	1037	3539	£160.00	£192.00
	858	18	4	563041	1436	4901	£205.00	£246.00
	1042	22	4	563042	1756	5993	£265.00	£318.00
	1272	27	4	563043	2155	7355	£315.00	£378.00

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

Floor mounting brackets are available, for more information see page 163.

UPGRADE TO A
SOFTLINE
COLUMN
CONCEPT FROM

£75.00*

*based on 600 x 628 x 3 column





NEW SOFTLINE COLUMN CONCEPT

Stelrad® Softline Series

Add a little colour to your home with the new Anthracite Grey radiator, it's the ideal choice if you want to be 'IN' fashion this season!
Available in a range of sizes to complement every room.

50 Δt

(75/65/20°C)

Height mm	Length mm	Elements	Columns	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
600	628	13	3	563133	792	2703	£230.00	£276.00
	858	18	3	563134	1096	3741	£255.00	£306.00
	1042	22	3	563135	1340	4573	£280.00	£336.00
	1272	27	3	563136	1644	5611	£350.00	£420.00
	628	13	4	563140	1037	3539	£240.00	£288.00
	858	18	4	563141	1436	4901	£280.00	£336.00
	1042	22	4	563142	1756	5993	£340.00	£408.00
	1272	27	4	563143	2155	7355	£395.00	£474.00

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from www.stelrad.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

Floor mounting brackets are available, for more information see page 163.

SOFTLINE COLUMN CONCEPT COMES IN RAL: A7016 ANTHRACITE GREY AND IS AVAILABLE FROM STOCK.



A7016 Anthracite Grey



NEW SOFTLINE COLUMN VERTICAL



The Softline Column Vertical provides a real style statement. Ideal for use in any minimalist projects or where wall space is restricted.

50 Δt


(75/65/20°C)

Height mm	Length mm	Elements	Columns	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
1800	444	9	2	563055	1116	3809	£180.00	£216.00
2000	444	9	2	563057	1242	4239	£200.00	£240.00

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

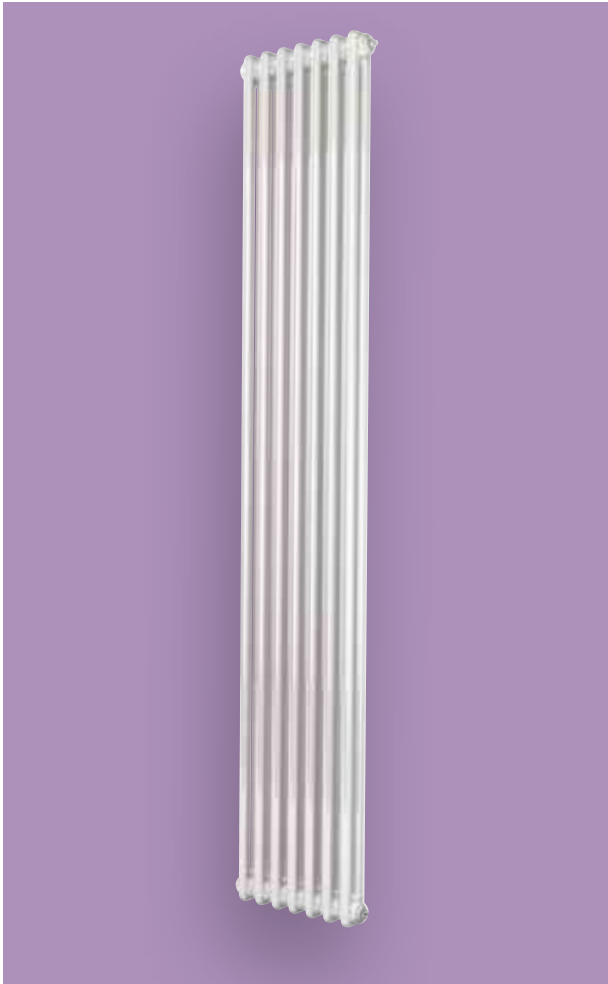



SOFTLINE COMPACT VERTICAL

Stelrad® Softline Series

The Softline Compact Vertical is a stylish, attractive radiator for applications where space is at a premium. The Softline Compact Vertical is designed to complement the Stelrad Softline Series.

50 Δt

(75/65/20°C)

K2



Height mm	Length mm	Sections	Stelrad UIN	Watts	Heat output Btu/h	Price excl VAT	Price incl VAT
1800	400	12	87122418	1584	5405	£200.26	£240.31
	500	15	87122518	1980	6756	£220.15	£264.18
	600	18	87122618	2376	8107	£240.97	£289.16

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV NOW AVAILABLE

Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00
145317	Angled Right White	£50.00	£60.00
145318	Angled Right Chrome	£50.00	£60.00



UPGRADE TO A
SOFTLINE DECO
VERTICAL FROM

£67.66*

*based on 1800 x 400 K2





SOFTLINE DECO VERTICAL


Stelrad Softline Series

The subtle architectural look and feel of the Softline Deco Vertical is combined with value, range and availability to give you sophisticated designer styling for any room, commercial or domestic, at affordable prices.

50 Δt

(75/65/20°C)

K2



Height mm	Length mm	Sections	Stelrad UIN	Watts	Heat output Btu/h	Price excl VAT	Price incl VAT
1800	400	12	87222418	1476	5036	£267.92	£321.50
	500	15	87222518	1845	6295	£294.42	£353.30
	600	18	87222618	2214	7554	£322.41	£386.89

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV NOW AVAILABLE


Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00
145317	Angled Right White	£50.00	£60.00
145318	Angled Right Chrome	£50.00	£60.00



UPGRADE TO A
SOFTLINE PLAN
VERTICAL FROM

£20.86*

*based on 1800 x 400 K2

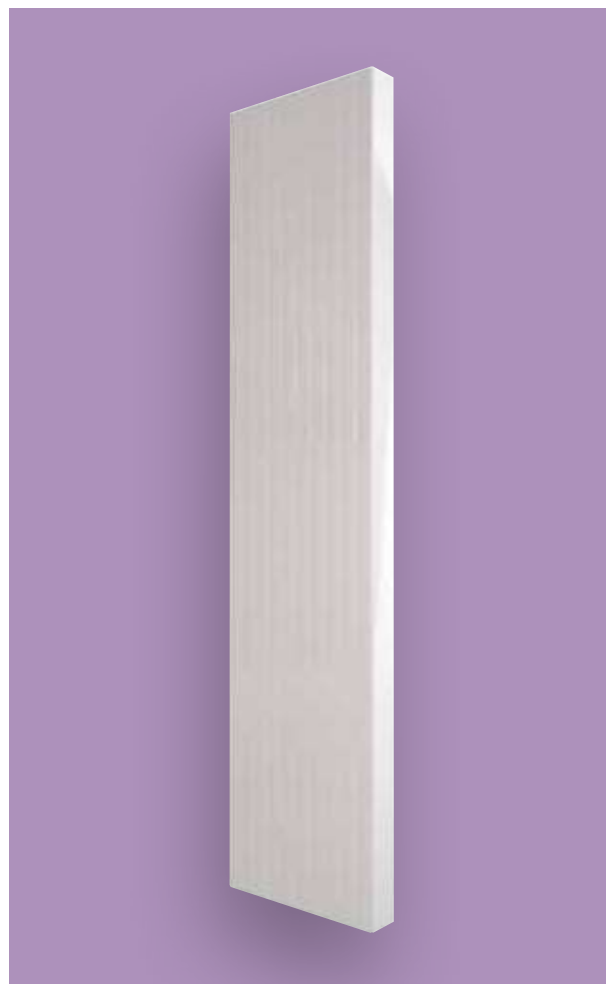



SOFTLINE PLAN VERTICAL


Stelrad® Softline Series

Simple and understated design makes the Softline Plan Vertical the ultimate in minimalism for radiators. With its completely flat, smooth finish, it has a remarkably slim and stylish profile that will enhance any space.

50 Δt

(75/65/20°C)

K2



Height mm	Length mm	Sections	Stelrad UIN	Watts	Heat output Btu/h	Price excl VAT	Price incl VAT
1800	400	12	87322418	1476	5036	£288.78	£346.54
	500	15	87322518	1845	6295	£320.21	£384.25
	600	18	87322618	2214	7554	£350.45	£420.54

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV NOW AVAILABLE

Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00
145317	Angled Right White	£50.00	£60.00
145318	Angled Right Chrome	£50.00	£60.00






SOFTLINE COMPACT K3

Stelrad® Softline Series

The Softline Compact K3 radiator brings a model to the popular Softline Series, that is ideal for low energy heating systems. It provides outstanding heat output from a smaller radiator footprint.

50 Δt

(75/65/20°C)



Height mm	Length mm	Sections	Stelrad UIN	Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
600	400	12	80603304	956	3262	£106.08	£127.30
	500	15	80603305	1195	4077	£128.22	£153.86
	600	18	80603306	1433	4889	£147.82	£177.38
	700	21	80603307	1672	5705	£168.36	£202.03
	800	24	80603308	1911	6520	£191.65	£229.98
	900	27	80603309	2150	7336	£211.79	£254.15
	1000	30	80603310	2389	8151	£231.54	£277.85
	1100	33	80603311	2628	8967	£252.38	£302.86
	1200	36	80603312	2867	9782	£275.52	£330.62
	1400	42	80603314	3345	11413	£296.24	£355.49

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).


For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.





BLENDING FORM AND FUNCTION

Stelrad's range of super-stylish radiators give you extensive options to express and complement any design concept. Subtle, striking, classic or contemporary - there are hundreds of models to choose from, in all sorts of shapes, sizes and colours, to suit any living space.

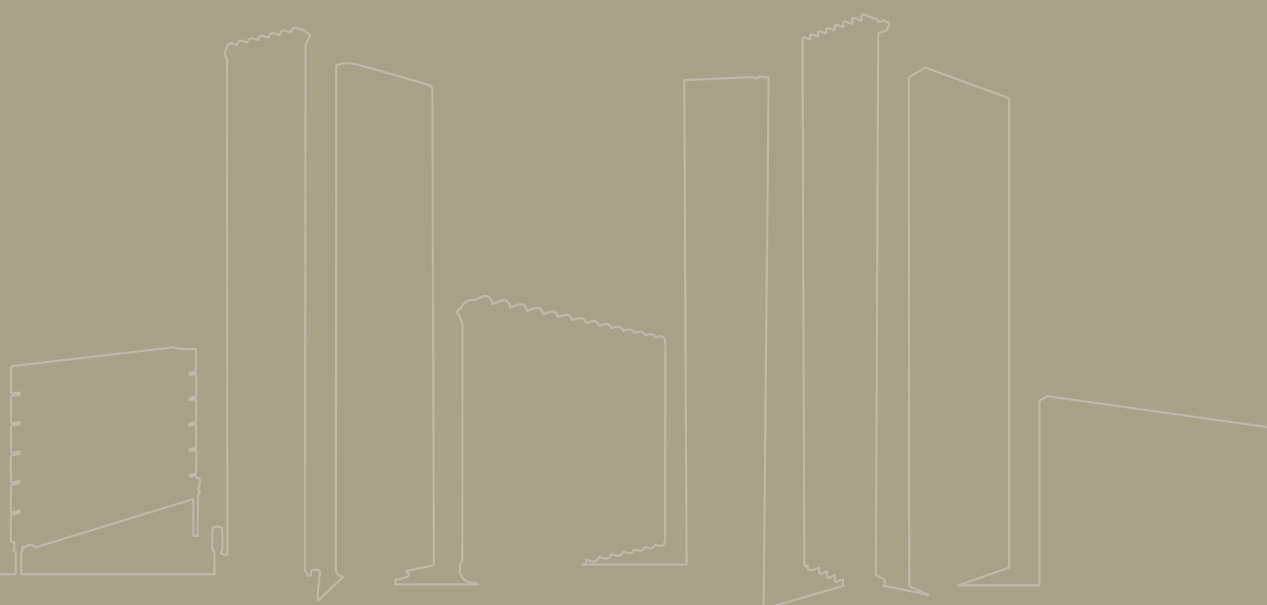

DESIGNER SERIES

Compact with Style Range

Planar Range

Concord Range

Classic Column Range

Swing

Caliente Range



COMPACT WITH STYLE HORIZONTAL

 **Stelrad**® Designer Series

Subtle architectural looks combine with outstanding Stelrad value, choice and availability to make the Compact with Style Horizontal perfect for designer styling in any room.

50 Δt

(75/65/20°C)

K1



K2



Height mm	Length mm	Sections	Stelrad UIN	Heat output		Stelrad UIN	Heat output	
				Watts	Btu/hr		Watts	Btu/hr
300	500	15	7431105	235	802	7432205	465	1587
	1000	30	7431110	469	1601	7432210	929	3171
	1400	42	7431114	657	2242	7432214	1301	4440
	2000	60	7431120	938	3201	7432220	1858	6341
500	400	12	7451104	298	1017	7452204	555	1894
	600	18	7451106	448	1529	7452206	833	2843
	800	24	7451108	597	2038	7452208	1110	3788
	1000	30	7451110	746	2546	7452210	1388	4737
	1200	36	7451112	895	3055	7452212	1666	5686
	1400	42	7451114	1044	3563	7452214	1943	6631
	1600	48	7451116	1194	4075	7452216	2221	7580
	1800	54	7451118	1343	4584	7452218	2498	8526
600	2000	60	7451120	1492	5092	7452220	2776	9474
	400	12	7461104	348	1188	7462204	640	2184
	600	18	7461106	522	1782	7462206	961	3280
	800	24	7461108	696	2375	7462208	1281	4372
	1000	30	7461110	870	2969	7462210	1601	5464
	1200	36	7461112	1044	3563	7462212	1921	6556
	1400	42	7461114	1218	4157	7462214	2241	7649
	1600	48	7461116	1392	4751	7462216	2562	8744
	1800	54	7461118	1566	5345	7462218	2882	9836
	2000	60	7461120	1740	5939	7462220	3202	10928

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

COLOUR OPTIONS



Comes in White as standard (RAL 9016). Please refer to page 164 for colour options.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.





COMPACT WITH STYLE LO-LINE

 **Stelrad**® Designer Series

The low set, stylish design of the Compact with Style Lo-line creates a sophisticated, subtle look that's at home with any décor choice - and with great Stelrad value too.


50 Δt

(75/65/20°C)

P+



K2



Height mm	Length mm	Sections	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr
200	500	15	7422105	242	826	7422205	307	1048
	1000	30	7422110	483	1648	7422210	614	2096
	1400	42	7422114	676	2307	7422214	860	2935
	2000	60	7422120	966	3297	7422220	1228	4191

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

This product is only floor standing, no wall brackets are supplied.





COMPACT WITH STYLE VERTICAL

Stelrad Designer Series

Stunning good looks are combined with the quality and performance you would expect from Stelrad.


50 Δt

(75/65/20°C)

P2



K2



Height mm	Length mm	Sections	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr
1600	300	9	148140	693	2365	-	-	-
	500	15	148148	1155	3942	-	-	-
	600	18	148152	1386	4730	-	-	-
1800	300	9	148141	760	2594	-	-	-
	400	12	-	-	-	32182204	1476	5036
	500	15	148149	1266	4321	32182205	1845	6295
	600	18	148153	1519	5184	32182206	2214	7554
	700	21	-	-	-	32182207	2583	8813
2000	300	9	148142	824	2812	-	-	-
	400	12	-	-	-	32202204	1588	5405
	500	15	148150	1374	4689	32202205	1980	6756
	600	18	148154	1649	5628	32202206	2376	8107
	700	21	-	-	-	32202207	2772	9458
2200	300	9	148143	887	3027	32222203	1269	4330
	400	12	-	-	-	32222204	1692	5773
	500	15	148151	1479	5048	32222205	2115	7216
	600	18	148155	1775	6058	32222206	2538	8660

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV NOW AVAILABLE

Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00
145317	Angled Right White	£50.00	£60.00
145318	Angled Right Chrome	£50.00	£60.00




COLOUR OPTIONS



Comes in White as standard (RAL 9016).
Please refer to page 164 for colour options.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

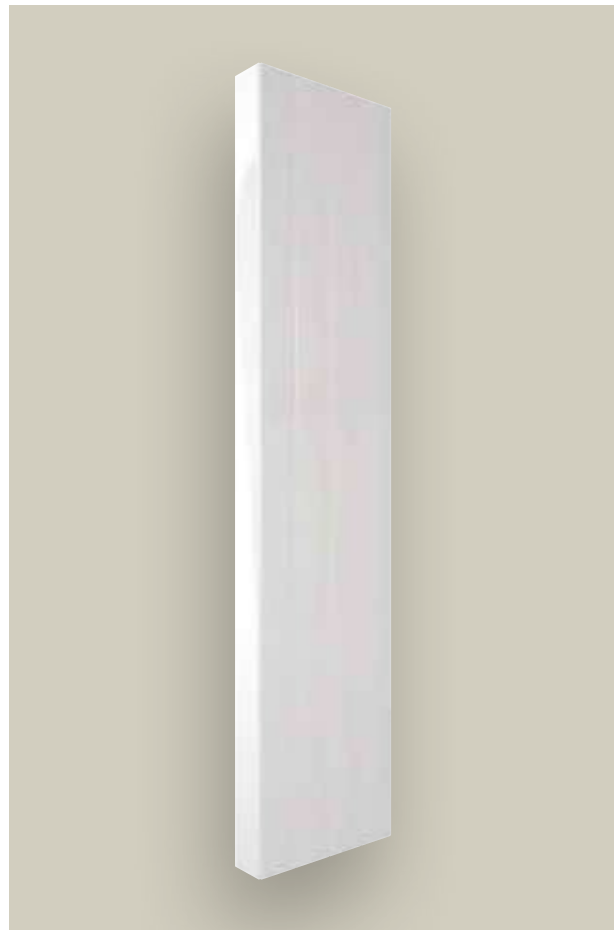




The simple and understated design makes the Stelrad Planar the ultimate in minimalism for radiators. With its completely flat, smooth finish and integrated top grille and side panels it has a remarkably slim and stylish profile that will enhance the look in any room.

50 Δt

(75/65/20°C)

K1



K2



Height mm	Length mm	Sections	Stelrad UIN	Watts	Heat output Btu/hr	Stelrad UIN	Watts	Heat output Btu/hr
300	500	15	140900	235	802	140904	465	1587
	1000	30	140901	469	1601	140905	929	3171
	1400	42	140902	657	2242	140906	1301	4440
	2000	60	140903	938	3201	140907	1858	6341
400	400	12	140908	250	853	140917	471	1608
	600	18	140909	376	1283	140918	706	2410
	800	24	140910	501	1710	140919	942	3215
	1000	30	140911	626	2137	140920	1177	4017
	1200	36	140912	751	2563	140921	1412	4819
	1400	42	140913	876	2990	140922	1648	5625
	1600	48	140914	1002	3420	140923	1883	6427
	1800	54	140915	1127	3846	140924	2119	7232
500	2000	60	140916	1252	4273	140925	2354	8034
	400	12	140926	310	1058	140935	564	1925
	600	18	140927	464	1584	140936	847	2891
	800	24	140928	619	2113	140937	1129	3853
	1000	30	140929	774	2642	140938	1411	4816
	1200	36	140930	929	3171	140939	1693	5778
	1400	42	140931	1084	3700	140940	1975	6741
	1600	48	140932	1238	4225	140941	2258	7707
600	1800	54	140933	1393	4754	140942	2540	8669
	2000	60	140934	1548	5283	140943	2822	9631
	400	12	140944	364	1242	140953	654	2232
	600	18	140945	547	1867	140954	980	3345
	800	24	140946	729	2488	140955	1307	4461
	1000	30	140947	911	3109	140956	1634	5577
	1200	36	140948	1093	3730	140957	1961	6693
	1400	42	140949	1275	4352	140958	2288	7809
700	1600	48	140950	1458	4976	140959	2614	8922
	1800	54	140951	1640	5597	140960	2941	10038
	2000	60	140952	1822	6218	140961	3268	11154
	400	12	140974	415	1417	140983	739	2522
	600	18	140975	623	2125	140984	1109	3783
	800	30	140976	830	2833	140985	1478	5044
	1000	36	140977	1038	3542	140986	1848	6305
	1200	42	140978	1246	4250	140987	2218	7566
	1400	48	140979	1453	4958	140988	2587	8828
	1600	54	140980	1661	5667	140989	2957	10089
	1800	60	140981	1868	6375	140990	3326	11350
	2000	66	140982	2076	7083	140991	3696	12611

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

COLOUR OPTIONS

Comes in White as standard (RAL 9016). Please refer to page 164 for colour options.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.





PLANAR VERTICAL


Stelrad Designer Series

With an exceptionally slim profile and silky-smooth surface, the Stelrad Planar offers a stylish alternative for domestic or commercial developments.

50 Δt

(75/65/20°C)

K2



Height mm	Length mm	Sections	Stelrad UIN	Watts	Heat output Btu/hr
1800	400	12	30182204	1476	5036
	500	15	30182205	1845	6295
	600	18	30182206	2214	7554
	700	21	30182207	2583	8813
2000	400	12	30202204	1584	5405
	500	15	30202205	1980	6756
	600	18	30202206	2376	8107
	700	21	30202207	2772	9458
2200	400	12	30222204	1692	5773
	500	15	30222205	2115	7216
	600	18	30222206	2538	8660
	700	21	30222207	2961	10103

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV NOW AVAILABLE

Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00
145317	Angled Right White	£50.00	£60.00
145318	Angled Right Chrome	£50.00	£60.00




COLOUR OPTIONS



Comes in White as standard (RAL 9016).
Please refer to page 164 for colour options.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

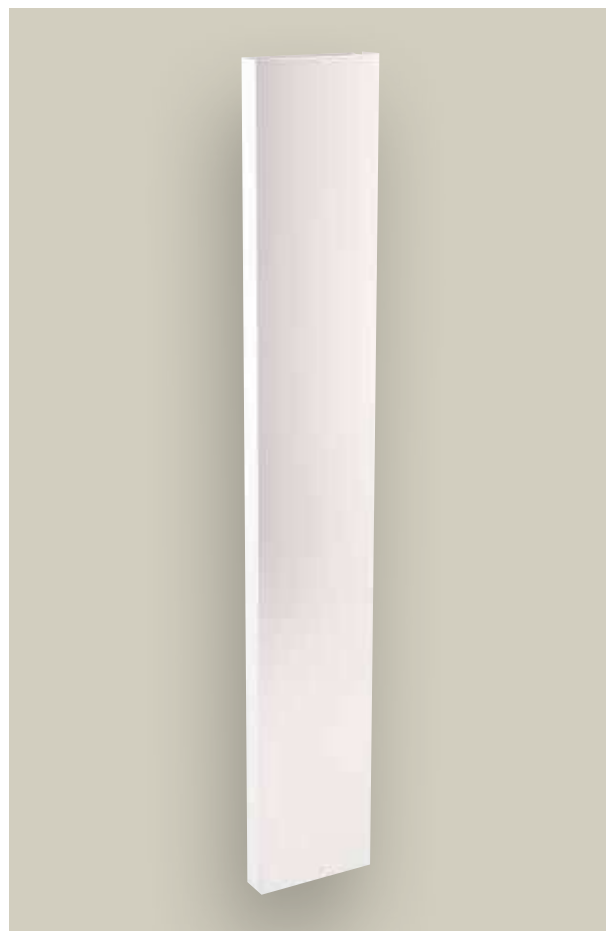



Super stylish, with a distinctive profile created by slim, flat horizontal tubes, the Concord Plane has a great combination of design and technology, and it's perfect for any room.

50 Δt

(75/65/20°C)

SINGLE



DOUBLE



Height mm	Length mm	Elements	Tap centres	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr
440	500	6	512	148346	382	1303	148397	673	2296
	600	6	612	148347	458	1563	148398	808	2757
	700	6	712	148348	535	1825	148399	942	3214
	800	6	812	148349	611	2085	148400	1077	3675
	900	6	912	148350	688	2347	148401	1211	4132
	1000	6	1012	148351	764	2607	148402	1346	4593
	1100	6	1112	148352	840	2866	148403	1481	5053
	1200	6	1212	148353	917	3129	148404	1615	5510
	1400	6	1412	148354	1070	3651	148405	1884	6428
	1600	6	1612	148355	1222	4169	148406	2154	7349
	1800	6	1812	148356	1375	4692	148407	2423	8267
	2000	6	2012	148357	1528	5214	148408	2692	9185
	2200	6	2212	148358	1681	5736	148409	2961	10103
	2400	6	2412	148359	1834	6258	148410	3230	11021
	2600	6	2612	148360	1986	6776	148411	3500	11942
	2800	6	2812	148361	2139	7298	148412	3769	12860
	3000	6	3012	148362	2292	7820	148413	4038	13778
588	500	8	512	148363	500	1706	148414	827	2822
	600	8	612	148364	599	2044	148415	992	3385
	700	8	712	148365	699	2385	148416	1158	3951
	800	8	812	148366	799	2726	148417	1323	4514
	900	8	912	148367	899	3067	148418	1489	5080
	1000	8	1012	148368	999	3409	148419	1654	5643
	1100	8	1112	148369	1099	3750	148420	1819	6206
	1200	8	1212	148370	1199	4091	148421	1985	6773
	1400	8	1412	148371	1399	4773	148422	2316	7902
	1600	8	1612	148372	1598	5452	148423	2646	9028
	1800	8	1812	148373	1798	6135	148424	2977	10158
	2000	8	2012	148374	1998	6817	148425	3308	11287
	2200	8	2212	148375	2198	7500	148426	3639	12416
	2400	8	2412	148376	2398	8182	148427	3970	13546
	2600	8	2612	148377	2597	8861	148428	4300	14672
	2800	8	2812	148378	2797	9543	148429	4631	15801
	3000	8	3012	148379	2997	10226	148430	4962	16930
736	500	10	512	148380	606	2068	148431	1046	3569
	600	10	612	148381	727	2481	148432	1255	4282
	700	10	712	148382	848	2893	148433	1464	4995
	800	10	812	148383	970	3310	148434	1674	5712
	900	10	912	148384	1091	3722	148435	1883	6425
	1000	10	1012	148385	1212	4135	148436	2092	7138
	1100	10	1112	148386	1333	4548	148437	2301	7851
	1200	10	1212	148387	1454	4961	148438	2510	8564
	1400	10	1412	148388	1697	5790	148439	2929	9994
	1600	10	1612	148389	1939	6616	148440	3347	11420
	1800	10	1812	148390	2182	7445	148441	3766	12850
	2000	10	2012	148391	2424	8271	148442	4184	14276
	2200	10	2212	148392	2666	9096	148443	4602	15702
	2400	10	2412	148393	2909	9926	148444	5021	17132
	2600	10	2612	148394	3151	10751	148445	5439	18558
	2800	10	2812	148395	3394	11580	148446	5858	19987
	3000	10	3012	148396	3636	12406	148447	6276	21414

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

COLOUR OPTIONS



Comes in White as standard (RAL 9016).
Please refer to page 165 for colour options.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.



IN STOCK



RAL 9016



CONCORD LO-LINE

 **Stelrad** Designer Series

With a low set profile at just 144mm or 292mm high, and great looking design based on slim, flat horizontal tubes, the Concord Lo-line is a stylish, technically advanced radiator from Stelrad.

50 Δt

(75/65/20°C)

Height mm	Length mm	Elements	Tap centres	Stelrad UIN	Watts	Heat output Btu/hr
144	800	2	812	148308	530	1808
	1000	2	1012	148309	663	2262
	1200	2	1212	148310	796	2716
	1400	2	1412	148311	928	3166
	1600	2	1612	148312	1061	3620
	1800	2	1812	148313	1193	4071
	2000	2	2012	148314	1326	4524
	2200	2	2212	148315	1459	4978
292	800	4	812	148316	898	3064
	1000	4	1012	148317	1122	3828
	1200	4	1212	148318	1346	4593
	1400	4	1412	148319	1571	5360
	1600	4	1612	148320	1795	6125
	1800	4	1812	148321	2020	6892
	2000	4	2012	148322	2244	7657
	2200	4	2212	148323	2468	8421

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

If feet are required, they must be ordered when you purchase your product. The feet are welded on and can not be added to the product once your order has been placed.

COLOUR OPTIONS



Comes in White as standard (RAL 9016). Please refer to page 165 for colour options.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

IN STOCK



RAL 9016





CONCORD VERTICAL

 **Stelrad**® Designer Series

The outstanding visual appeal of the Concord Vertical, created by a slim flat tubes of heights up to 2 metres, combines with advanced technology to make this a versatile solution for many applications.

50 Δt

(75/65/20°C)

VERTICAL SINGLE

Height mm	Length mm	Elements	Tap centres	Stelrad UIN	Watts	Heat output Btu/hr
1800	440	6	440	148340	780	2661
	588	8	588	148341	1040	3548
	736	10	736	148342	1300	4436
2000	440	6	440	148343	870	2968
	588	8	588	148344	1160	3958
	736	10	736	148345	1450	4947

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

COLOUR OPTIONS



Comes in White as standard (RAL 9016). Please refer to page 165 for colour options.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.





Super slim and super stylish, the Concord Slimline reaches new heights of aesthetic appeal. Slender flat vertical tubes and advanced Stelrad technology combine to create a great look for any room.

50 Δt

(75/65/20°C)

Height mm	Length mm	Elements	Tap centres	Stelrad UIN	Heat output Watts	Btu/hr
1800	320	8	320	148300	872	2975
	440	11	440	148301	1199	4091
	520	13	520	148302	1417	4835
	640	16	640	148303	1744	5951
2000	320	8	320	148304	978	3337
	440	11	440	148305	1344	4586
	520	13	520	148306	1589	5422
	640	16	640	148307	1956	6674

Δt_{50} is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt_{40} or Δt_{30} output (see your installer or system designer or download from www.stelrad.com).


For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

COLOUR OPTIONS



Comes in White as standard (RAL 9016). Please refer to page 165 for colour options.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

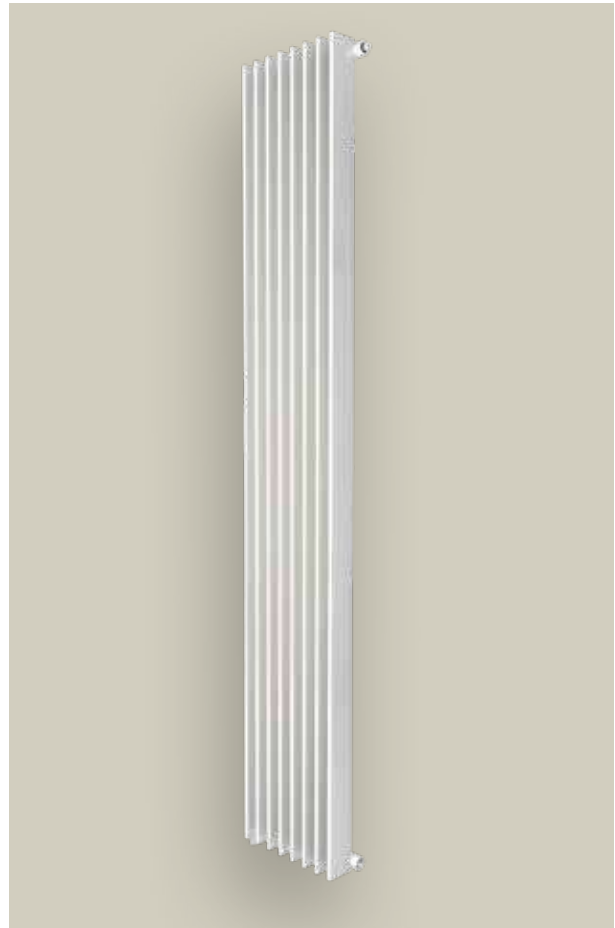



CLASSIC COLUMN HORIZONTAL Stelrad® Designer Series

A timeless classic design, to complement both contemporary and traditional interiors. The Stelrad Classic Column is a real style statement, with a beautiful finish and sizes to suit almost any space.

50 Δt

(75/65/20°C)

Height mm	Length mm	Elements	Columns	Stelrad UIN	Watts	Heat output Btu/hr
300	444	9	3	163000	288	983
	628	13	3	163001	416	1420
	858	18	3	163002	576	1966
	1042	22	3	163003	704	2403
	1272	27	3	163004	864	2949
	1456	31	3	163005	992	3386
	1870	40	3	163006	1280	4369
	444	9	4	163007	377	1287
	628	13	4	163008	545	1860
	858	18	4	163009	754	2573
	1042	22	4	163010	922	3147
	1272	27	4	163011	1131	3860
500	628	13	2	163012	499	1703
	858	18	2	163013	691	2358
	1042	22	2	163014	845	2884
	1272	27	2	163015	1037	3539
	444	9	3	163016	464	1584
	628	13	3	163017	671	2290
	858	18	3	163018	929	3171
	1042	22	3	163019	1135	3874
	1272	27	3	163020	1393	4754
	1456	31	3	163021	1600	5461
	1870	40	3	163022	2064	7044
	444	9	4	163023	608	2075
	628	13	4	163024	879	3000
	858	18	4	163025	1217	4154
	1042	22	4	163026	1487	5075
	1272	27	4	163027	1825	6229
	628	13	2	163028	589	2010
	858	18	2	163029	815	2782
600	1042	22	2	163030	997	3403
	1272	27	2	163031	1223	4174
	444	9	3	163032	548	1870
	628	13	3	163033	792	2703
	858	18	3	163034	1096	3741
	1042	22	3	163035	1340	4573
	1272	27	3	163036	1644	5611
	1456	31	3	163037	1888	6444
	1870	40	3	163038	2436	8314
	444	9	4	163039	718	2451
	628	13	4	163040	1037	3539
	858	18	4	163041	1436	4901
	1042	22	4	163042	1756	5993
	1272	27	4	163043	2155	7355
	858	18	3	163044	1337	4563
	1042	22	3	163045	1635	5580
	1272	27	3	163046	2006	6846
750	1456	31	3	163047	2303	7860
	1870	40	3	163048	2972	10143
	444	9	4	163049	877	2993
	628	13	4	163050	1266	4321
	858	18	4	163051	1753	5983
	1042	22	4	163052	2143	7314
	1272	27	4	163053	2630	8976

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from www.stelrad.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

COLOUR OPTIONS



Comes in White as standard (RAL 9016). Please refer to page 165 for colour options.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For more information on colour radiator prices please contact your local merchant.

Floor mounting brackets are available, for more information see page 163.





CLASSIC COLUMN VERTICAL

 **Stelrad** Designer Series

With a variety of heights and widths the Classic Column provides versatile sizing flexibility that is ideal for use in a minimalist project, or for applications where work space is restricted.

50 Δt

(75/65/20°C)

Height mm	Length mm	Elements	Columns	Stelrad UIN	Watts	Heat output Btu/hr
1800	352	7	2	163054	868	2962
	444	9	2	163055	1116	3809
2000	352	7	2	163056	966	3297
	444	9	2	163057	1242	4239
2500	352	7	2	163058	1197	4085
	444	9	2	163059	1539	5253

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

Due to production tolerances, the length of the product and therefore the tap centres could contain a variation of +/- 1.5% of the overall stated length.

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.


COLOUR OPTIONS



Comes in White as standard (RAL 9016). Please refer to page 165 for colour options.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

For more information on colour radiator prices please contact your local merchant.

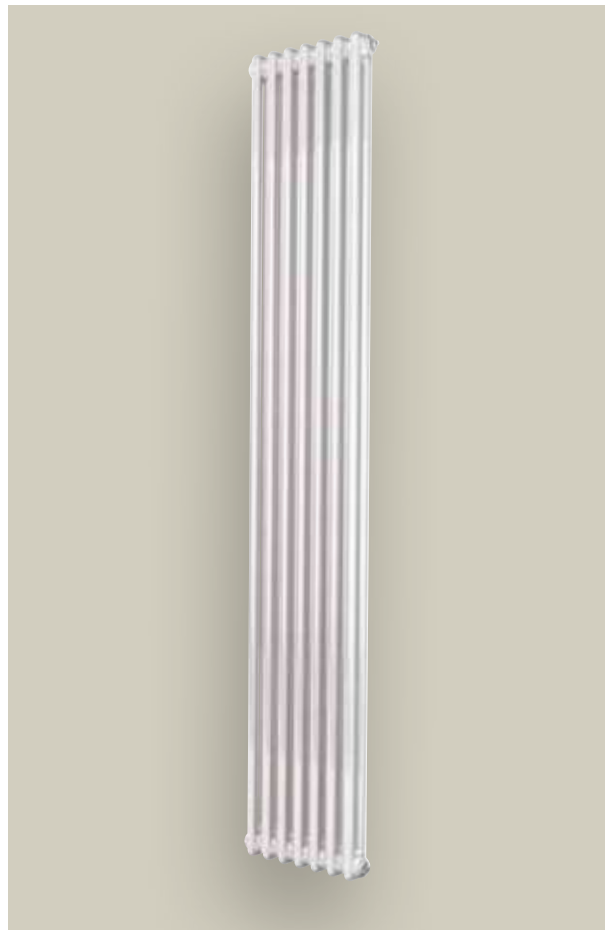



A3002 Carmine Red

The curved cover of the Stelrad Swing makes it a focal point in any room. And with a choice of 36 colours you can make a real statement.

50 Δt

(75/65/20°C)

P+

K2

Height mm	Emitter Length mm	Casing Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Emitter Length mm	Casing Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr
1820	400	504	38418210	1224	4176	400	527	38418220	1476	5036
	500	604	38518210	1530	5220	500	627	38518220	1845	6295
	600	704	38618210	1836	6264	600	727	38618220	2214	7554
2020	400	504	38420210	1308	4463	400	527	38420220	1584	5405
	500	604	38520210	1635	5579	500	627	38520220	1980	6756
	600	704	38620210	1962	6694	600	727	38620220	2376	8107

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

CENTRE TAP TRV NOW AVAILABLE

Stelrad UIN	Description	Price excl VAT	Price incl VAT
145313	Straight White	£50.00	£60.00
145314	Straight Chrome	£50.00	£60.00
145315	Angled Left White	£50.00	£60.00
145316	Angled Left Chrome	£50.00	£60.00
145317	Angled Right White	£50.00	£60.00
145318	Angled Right Chrome	£50.00	£60.00



COLOUR OPTIONS



Comes in White as standard (RAL 9016).
Please refer to page 164 for colour options.

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.



A9003 Signal White





CALIENTE HORIZONTAL

Stelrad Designer Series

A smart design, with slim tubes in a tight row, not only makes the Stelrad Caliente range look great - it also delivers a high heat output. Available in horizontal and vertical models to add style to any interior.

50 Δt

(75/65/20°C)

Height mm	Length mm	Elements	SINGLE TUBE			DOUBLE TUBE		
			Stelrad UIN	Watts	Heat output Btu/hr	Stelrad UIN	Watts	Heat output Btu/hr
594	800	18	405911800	626	2136	405922800	968	3306
	1000	18	405911100	788	2668	405922100	1211	4132
	1200	18	405911120	938	3200	-	-	-
	1400	18	405911140	1095	3736	-	-	-

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.





CALIENTE VERTICAL

Stelrad Designer Series

The Caliente is a stylish tubular design and is available in single and double tube versions. With an elegant tube-on-tube design consisting of a tight array of slim tubes makes the Caliente an easy choice for any modern, contemporary or period interior.


50 Δt

(75/65/20°C)

Height mm	Length mm	Elements	SINGLE TUBE			DOUBLE TUBE		
			Stelrad UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr
1200	330	10	401211330	485	1655	-	-	-
	495	15	401211495	727	2481	-	-	-
1800	330	10	401811330	702	2395	-	-	-
	429	13	401811429	912	3112	-	-	-
	495	15	-	-	-	401822495	1590	5425
	528	16	401811528	1123	3832	-	-	-
	660	20	401811660	1404	4790	401822660	2120	7233
	726	22	401811726	1544	5268	-	-	-

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

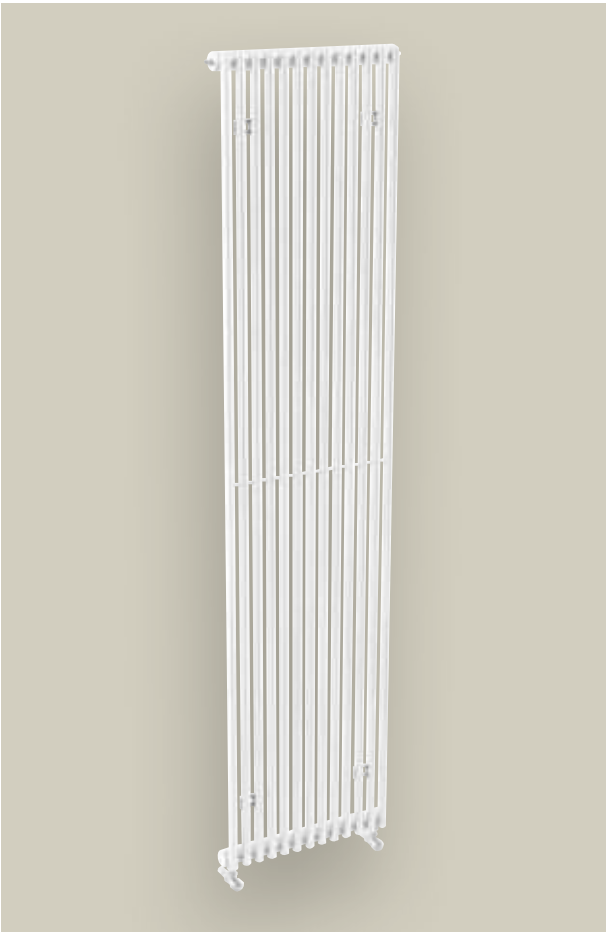





Stelrad®

Special Application Series

SPECIAL PERFORMANCE FOR SPECIALISED APPLICATIONS

The more demanding the location, the higher the performance needs to be. That's why we've developed an advanced new series of innovative ideas for specialised spaces, from our robust Heavy Duty Planar, designed to take the hard knocks in a wide variety of industrial applications, to the outstanding space-saving output of Compact K3 and Compact 300. The Compact Xtra Protection is rust resistant providing additional protection to applications where moisture is ever present in the atmosphere.



SPECIAL APPLICATION SERIES

Heavy Duty Planar

Compact K3

Compact 300

Compact Xtra Protection





The Stelrad Heavy Duty Planar looks stylish, yet it's robust enough to withstand the knocks of heavy traffic in commercial environments. Manufactured with a 2mm one section integrated steel fascia, incorporating side and top panels. The Heavy Duty Planar is also supplied with anti-lift brackets. It's designed to survive in a busy commercial area. And we're proud to say it's made in the UK.

50 Δt

(75/65/20°C)

K1



K2



Height mm	Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	List Price excl VAT	List Price incl VAT	Stelrad UIN	Heat output Watts	Heat output Btu/hr	List Price excl VAT	List Price incl VAT
450	400	141259	268	915	£185.84	£223.01	141269	500	1705	£235.69	£282.83
	600	141261	403	1376	£214.96	£257.95	141271	750	2559	£279.33	£335.20
	800	141262	537	1834	£240.80	£288.96	141272	999	3410	£331.33	£397.60
	1000	141263	672	2292	£279.55	£335.46	141273	1249	4262	£396.72	£476.06
	1200	141264	806	2751	£306.97	£368.36	141274	1499	5114	£439.64	£527.57
	1400	141265	941	3209	£341.65	£409.98	141275	1749	5967	£498.17	£597.80
	1600	141266	1075	3668	£376.73	£452.08	141276	1999	6819	£554.11	£664.93
	1800	141267	1209	4126	£419.07	£502.88	141277	2248	7672	£615.68	£738.82
	2000	141268	1362	4648	£455.76	£546.91	141278	2546	8686	£676.26	£811.51
600	400	141279	348	1187	£211.62	£253.94	141289	640	2184	£276.16	£331.39
	600	141281	522	1781	£251.52	£301.82	141291	961	3280	£339.41	£407.29
	800	141282	696	2375	£287.97	£345.56	141292	1281	4372	£404.22	£485.06
	1000	141283	870	2968	£338.44	£406.13	141293	1601	5464	£487.95	£585.54
	1200	141284	1044	3562	£375.84	£451.01	141294	1921	6556	£547.25	£656.70
	1400	141285	1218	4156	£420.76	£504.91	141295	2241	7649	£622.76	£747.31
	1600	141286	1392	4750	£466.43	£559.72	141296	2563	8744	£695.60	£834.72
	1800	141287	1566	5343	£520.62	£624.74	141297	2883	9836	£775.69	£930.83
	2000	141288	1740	5937	£567.63	£681.16	141298	3203	10928	£849.84	£1,019.81

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.






The Stelrad Compact K3 is the ideal choice for low energy systems, providing outstanding heat output from a smaller footprint.

50 Δt

(75/65/20°C)



Height mm	Length mm	Sections	Stelrad UIN	Watts	Heat output Btu/hr
300	1000	30	3033310	1349	4603
	2000	60	3033320	2698	9206
500	600	18	3053306	1234	4210
	700	21	3053307	1439	4910
	800	24	3053308	1645	5613
	900	27	3053309	1850	6312
	1000	30	3053310	2056	7015
	1100	33	3053311	2262	7718
	1200	36	3053312	2467	8417
	1400	42	3053314	2878	9820
	1600	48	3053316	3290	11225
	1800	54	3053318	3701	12628
	2000	60	3053320	4112	14030
	2400	72	3053324	4934	16835
600	400	12	3063304	956	3262
	500	15	3063305	1195	4077
	600	18	3063306	1433	4889
	700	21	3063307	1672	5705
	800	24	3063308	1911	6520
	900	27	3063309	2150	7336
	1000	30	3063310	2389	8151
	1100	33	3063311	2628	8967
	1200	36	3063312	2867	9782
	1400	42	3063314	3345	11413
	1600	48	3063316	3822	13041
	1800	54	3063318	4300	14672
	2000	60	3063320	4778	16303
	2400	72	3063324	5734	19564
700	500	15	3073305	1356	4627
	600	18	3073306	1627	5551
	700	21	3073307	1898	6476
	800	24	3073308	2170	7404
	900	27	3073309	2441	8329
	1000	30	3073310	2712	9253
	1100	33	3073311	2983	10178
	1200	36	3073312	3254	11103
	1400	42	3073314	3797	12955
	1600	48	3073316	4339	14805
	1800	54	3073318	4882	16657
	2000	60	3073320	5424	18507

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.





COMPACT 300

Stelrad Special Application Series

The introduction of the 300mm wide Compact radiator is the response to customer demand. These smaller radiators are ideal for smaller rooms, and those where available wall space is at a premium.

50 Δt

(75/65/20°C)

K1



K2



Height mm	Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Price excl VAT	Price incl VAT
600	300	143646	294	1003	£33.30	£39.96	143647	520	1774	£52.27	£62.72
700	300	143648	335	1143	£39.29	£47.15	143649	588	2006	£58.22	£69.86

Δt 50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt 40 or Δt 30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.





COMPACT XTRA PROTECTION

Stelrad Special Application Series

The Compact Xtra Protection radiator is rust resistant in high humidity environments, providing additional protection to applications where moisture is ever present in the atmosphere such as bathrooms, showers and wet rooms.

50 Δt

(75/65/20°C)

K1



K2



Height mm	Length mm	Stelrad UIN	Heat output		Price excl VAT	Price incl VAT	Stelrad UIN	Heat output		Price excl VAT	Price incl VAT
			Watts	Btu/hr				Watts	Btu/hr		
450	400	144850	302	1031	£54.24	£65.09	144858	548	1870	£78.28	£93.94
	600	144851	454	1550	£70.38	£84.46	144859	823	2809	£106.43	£127.72
	800	144852	605	2065	£87.01	£104.41	144860	1097	3744	£135.14	£162.17
	1000	144853	756	2580	£103.61	£124.33	144861	1371	4679	£164.09	£196.91
	1200	-	-	-	-	-	144867	1645	5614	£199.24	£239.09
	1400	-	-	-	-	-	144868	1919	6550	£241.92	£290.30
	1600	-	-	-	-	-	144869	2194	7488	£293.75	£352.50
	1800	-	-	-	-	-	144870	2468	8423	£356.68	£428.02
600	400	144854	392	1338	£60.50	£72.60	144862	693	2365	£95.29	£114.35
	600	144855	588	2007	£74.24	£89.09	144863	1039	3546	£129.22	£155.06
	800	144856	784	2676	£96.26	£115.51	144864	1386	4730	£168.00	£201.60
	1000	144857	980	3345	£118.24	£141.89	144865	1732	5911	£203.45	£244.14
	1200	-	-	-	-	-	144871	2078	7092	£246.38	£295.66
	1400	-	-	-	-	-	144872	2425	8277	£298.37	£358.04
	1600	-	-	-	-	-	144873	2771	9457	£361.33	£433.60
	1800	-	-	-	-	-	144874	3118	10642	£437.57	£525.08

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.







TAKING CARE IN SPECIAL ENVIRONMENTS

Stelrad's range of Low Surface Temperature radiators is the most comprehensive in the UK, with sizes and models to suit all applications. They all meet NHS Guidance for 'safe hot water and surface temperature' and are finished with antibacterial paint as standard, making them the No.1 choice for safety-critical environments. Installation is simple and all components are included in a single robust pack.

SAFETY SERIES

LST Standard

LST Plus Vertical




LST i Plus

NEW LST i Plus Xtra Protection



The Stelrad LST Standard leaves you free to specify your preferred controls. They all meet NHS Guidance for 'safe hot water and surface temperature' and are finished with anti-bacterial paint as standard.

50 Δt
(75/65/20°C)



Casing Height mm	Casing Length mm	Emitter Height mm	Emitter Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr
500	560	300	400	145000	196	669	145008	284	969	145016	348	1187
	760	300	600	145001	293	1000	145009	426	1454	145017	522	1781
	960	300	800	145002	391	1334	145010	568	1938	145018	696	2375
	1160	300	1000	145003	489	1668	145011	710	2423	145019	870	2968
	1360	300	1200	145004	587	2003	145012	852	2907	145020	1044	3562
	1560	300	1400	145005	685	2337	145013	994	3392	145021	1218	4156
	1760	300	1600	145006	782	2668	145014	1136	3876	145022	1392	4750
650	1960	300	1800	145007	880	3003	145015	1278	4361	145023	1566	5343
	560	450	400	145024	290	989	145032	386	1317	145040	478	1631
	760	450	600	145025	435	1484	145033	580	1979	145041	717	2446
	960	450	800	145026	580	1979	145034	773	2637	145042	956	3262
	1160	450	1000	145027	725	2474	145035	966	3296	145043	1195	4077
	1360	450	1200	145028	870	2968	145036	1159	3955	145044	1434	4893
	1560	450	1400	145029	1015	3463	145037	1352	4613	145045	1673	5708
800	1760	450	1600	145030	1160	3958	145038	1546	5275	145046	1912	6524
	1960	450	1800	145031	1305	4453	145039	1739	5933	145047	2151	7339
	460	600	300	145072	274	935	-	-	-	145073	461	1573
	560	600	400	145048	365	1245	145056	501	1709	145064	615	2098
	760	600	600	145049	548	1870	145057	751	2562	145065	922	3146
	960	600	800	145050	730	2491	145058	1002	3419	145066	1230	4197
	1160	600	1000	145051	913	3115	145059	1252	4272	145067	1537	5244
	1360	600	1200	145052	1096	3740	145060	1502	5125	145068	1844	6292
	1560	600	1400	145053	1278	4361	145061	1753	5981	145069	2152	7343
	1760	600	1600	145054	1461	4985	145062	2003	6834	145070	2459	8390
	1960	600	1800	145055	1643	5606	145063	2254	7691	145071	2767	9441

$\Delta t 50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t 40$ or $\Delta t 30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.



LST Standard front case view.



LST Standard inside the casing showing the emitter.



LST Standard emitter, showing high level valve option (valve not included).



LST Standard circular knockout for TRV. Oblong knockout for pipe.






LST PLUS VERTICAL



Stelrad's LST Vertical radiator is suitable for applications where space is at a premium. Meeting NHS Guidance for 'safe hot water and surface temperature' and finished with anti-bacterial paint as standard, makes the LST's the No.1 choice for safety-critical environments.

50 Δt

(75/65/20°C)




Casing Height mm	Casing Length mm	Emitter Height mm	Emitter Length mm	Stelrad UIN	Watts	Heat output Btu/hr
2110	560	1800	400	142241	1271	4337
	660	1800	500	142242	1588	5418
	760	1800	600	142243	1855	6330

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.



LST Plus Vertical inside the casing showing the emitter.



LST Plus Vertical oblong knockout for pipe.



LST Standard circular knockout for TRV. Oblong knockout for pipe.


5
YEAR WARRANTY ON CASING

10
YEAR WARRANTY ON EMITTER

BIM
AVAILABLE

CPD
AVAILABLE

10
BAR WORKING PRESSURE

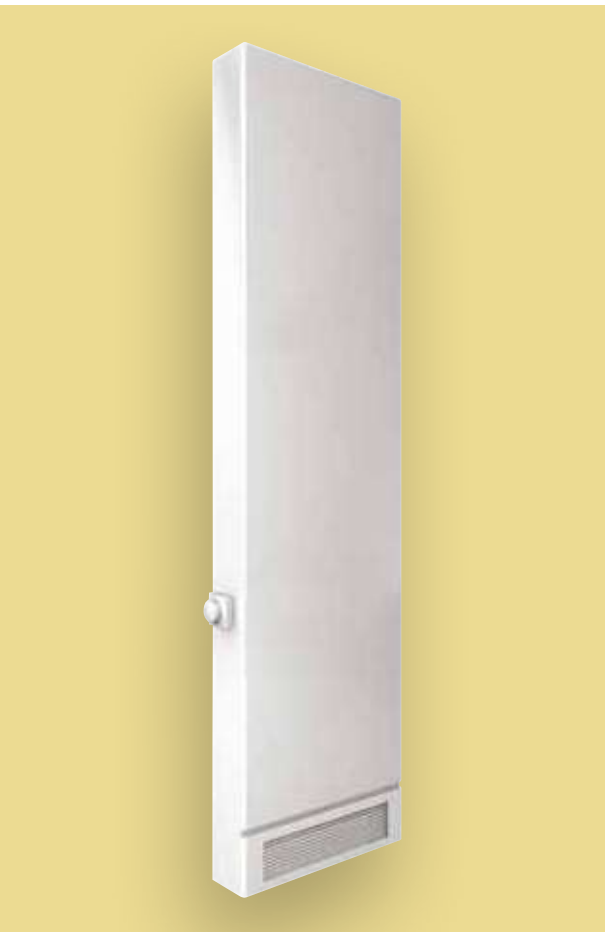




The Stelrad LST i Plus completes the popular LST range and offers improved heat outputs. It's simple and quick to install with an attractive, flat panel outer casing, which is totally reversible to allow for piping flexibility. All specified components are supplied in one robust package and the smooth surface is coated in anti-bacterial paint as standard.

50 Δt

(75/65/20°C)



Casing Height mm	Casing Length mm	Emitter Height mm	Emitter Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr	Stelrad UIN	Heat output Watts	Heat output Btu/hr
500	650	300	400	145200	196	669	145248	284	969	145224	348	1187
	850	300	600	145201	293	1000	145249	426	1454	145225	522	1781
	1050	300	800	145202	391	1334	145250	568	1938	145226	696	2375
	1250	300	1000	145203	489	1668	145251	710	2423	145227	870	2968
	1450	300	1200	145204	587	2003	145252	852	2907	145228	1044	3562
	1650	300	1400	145205	685	2337	145253	994	3392	145229	1218	4156
	1850	300	1600	145206	782	2668	145254	1136	3876	145230	1392	4750
650	2050	300	1800	145207	880	3003	145255	1278	4361	145231	1566	5343
	650	450	400	145208	290	989	145256	386	1317	145232	478	1631
	850	450	600	145209	435	1484	145257	580	1979	145233	717	2446
	1050	450	800	145210	580	1979	145258	773	2637	145234	956	3262
	1250	450	1000	145211	725	2474	145259	966	3296	145235	1195	4077
	1450	450	1200	145212	870	2968	145260	1159	3955	145236	1434	4893
	1650	450	1400	145213	1015	3463	145261	1352	4613	145237	1673	5708
800	1850	450	1600	145214	1160	3958	145262	1546	5275	145238	1912	6524
	2050	450	1800	145215	1305	4453	145263	1739	5933	145239	2151	7339
	650	600	400	145216	365	1245	145264	501	1709	145240	615	2098
	850	600	600	145217	548	1870	145265	751	2562	145241	922	3146
	1050	600	800	145218	730	2491	145266	1002	3419	145242	1230	4197
	1250	600	1000	145219	913	3115	145267	1252	4272	145243	1537	5244
	1450	600	1200	145220	1096	3740	145268	1502	5125	145244	1844	6292
	1650	600	1400	145221	1278	4361	145269	1753	5981	145245	2152	7343
	1850	600	1600	145222	1461	4985	145270	2003	6834	145246	2459	8390
	2050	600	1800	145223	1643	5606	145271	2254	7691	145247	2767	9441

$\Delta t50$ is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider $\Delta t40$ or $\Delta t30$ output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.



LST i Plus front case view.



LST i Plus inside the casing showing the emitter.



LST i Plus oblong knockout for pipe.



Optional cover cap to discourage unauthorised tampering.



An arthritic adaptor is supplied as standard for special needs environments.



Accommodated within the casing, the Stelrad LST i Plus emitter, with TBSE valve arrangement and 2 x 1/2" BSP connections as standard.



Includes Danfoss RA-2000 TRV and copper pipe configuration.



The remote sensing thermostatic valve gives accuracy of operation and the limiting device is completely hidden to prevent the maximum temperature being exceeded.






NEW LST i PLUS XTRA PROTECTION



The advanced technology of our acclaimed Low Surface Temperature radiator is rust resistant in high humidity areas, this additional finish provides extra protection in constantly moist environments making the Stelrad LST i Plus Xtra Protection the perfect high-performance choice for bathrooms, showers and wetrooms.

50 Δt
(75/65/20°C)



Casing Height mm	Casing Length mm	Emitter Height mm	Emitter Length mm	Stelrad UIN	Heat output Watts	Heat output Btu/hr
650	650	450	400	146232	478	1631
	850	450	600	146233	717	2446
	1050	450	800	146234	956	3262
	1250	450	1000	146235	1195	4077
	1450	450	1200	146236	1434	4893
	1650	450	1400	146237	1673	5708
	1850	450	1600	146238	1912	6524
800	2050	450	1800	146239	2151	7339
	650	600	400	146240	615	2098
	850	600	600	146241	922	3146
	1050	600	800	146242	1230	4197
	1250	600	1000	146243	1537	5244
	1450	600	1200	146244	1844	6292
	1650	600	1400	146245	2152	7343
	1850	600	1600	146246	2459	8390
	2050	600	1800	146247	2767	9441

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.



LST i Plus Xtra Protection front case view.



LST i Plus Xtra Protection inside the casing showing the emitter.



LST i Plus Xtra Protection oblong knockout for pipe.



Optional cover cap to discourage unauthorised tampering.



An arthritic adaptor is supplied as standard for special needs environments.



Accommodated within the casing, the Stelrad LST i Plus Xtra Protection emitter, with TBSE valve arrangement and 2 x 1/2" BSP connections as standard.



Includes Danfoss RA-2000 TRV and copper pipe configuration.



The remote sensing thermostatic valve gives accuracy of operation and the limiting device is completely hidden to prevent the maximum temperature being exceeded.

5

YEAR WARRANTY ON CASING

10

YEAR WARRANTY ON EMITTER

10

BAR WORKING PRESSURE



RADICAL THINKING BY STELRAD

The European Union are making energy consumption standards stricter, so here at Stelrad we believe the heating industry has a major role to play, by developing systems that work so efficiently that they produce more heat at lower temperatures.



ENERGY SAVING SERIES

Radical



Radical™
The Energy Saving Radiator

PRODUCT SUMMARY:

- A radiator that produces more comfort at less cost
- A radiator that reduces energy bills by up to 10.5%
- Raising comfort levels with more radiant heat
- Up to 50% more radiant heat means more comfort - at a lower cost
- Compatible with:
 - Gas boilers • Ground source heat pumps (GSHP) • Air source heat pumps (ASHP)
 - Solar PV • Biomass
- Supported by a RIBA & CIBSE CPD programme
- Energy savings tested, assessed and declared by KIWA

The Stelrad Radical Energy Saving Radiator can save up to 10.5% on energy bills, delivering higher comfort levels at a lower thermostat setting. That's radical thinking, from Stelrad. It's the first serial feed radiator in the UK, meaning you simply feel warmer faster - and it's less costly, both on the pocket and to the environment.


50 Δt

(75/65/20°C)

K1



K2



Height mm	Length mm	Straight 10mm UIN	Angle 10mm UIN	Straight 15mm UIN	Angle 15mm UIN	Heat output Watts	Heat output Btu/hr	Straight 10mm UIN	Angle 10mm UIN	Straight 15mm UIN	Angle 15mm UIN	Heat output Watts	Heat output Btu/hr
300	1000	33111010S	33111010A	33111015S	33111015A	509	1737	33221010S	33221010A	33221015S	33221015A	933	3183
500	400	35110410S	35110410A	35110415S	35110415A	333	1136	35220410S	35220410A	35220415S	35220415A	560	1911
	500	35110510S	35110510A	35110515S	35110515A	417	1423	35220510S	35220510A	35220515S	35220515A	701	2392
	600	35110610S	35110610A	35110615S	35110615A	500	1706	35220610S	35220610A	35220615S	35220615A	841	2869
	700	-	-	-	-	-	-	35220710S	35220710A	35220715S	35220715A	981	3347
	800	-	-	-	-	-	-	35220810S	35220810A	35220815S	35220815A	1121	3825
	900	-	-	-	-	-	-	35220910S	35220910A	35220915S	35220915A	1261	4303
	1000	-	-	-	-	-	-	35221010S	35221010A	35221015S	35221015A	1401	4780
	1200	-	-	-	-	-	-	35221210S	35221210A	35221215S	35221215A	1681	5736
	1400	-	-	-	-	-	-	35221410S	35221410A	35221415S	35221415A	1961	6691
	1600	-	-	-	-	-	-	35221610S	35221610A	35221615S	35221615A	2242	7650
	1800	-	-	-	-	-	-	35221810S	35221810A	35221815S	35221815A	2522	8605
	2000	-	-	-	-	-	-	35222010S	35222010A	35222015S	35222015A	2802	9560
600	400	36110410S	36110410A	36110415S	36110415A	392	1338	36220410S	36220410A	36220415S	36220415A	647	2208
	500	36110510S	36110510A	36110515S	36110515A	490	1672	36220510S	36220510A	36220515S	36220515A	809	2760
	600	36110610S	36110610A	36110615S	36110615A	588	2006	36220610S	36220610A	36220615S	36220615A	970	3310
	700	-	-	-	-	-	-	36220710S	36220710A	36220715S	36220715A	1132	3862
	800	-	-	-	-	-	-	36220810S	36220810A	36220815S	36220815A	1294	4415
	900	-	-	-	-	-	-	36220910S	36220910A	36220915S	36220915A	1455	4964
	1000	-	-	-	-	-	-	36221010S	36221010A	36221015S	36221015A	1617	5517
	1100	-	-	-	-	-	-	36221110S	36221110A	36221115S	36221115A	1779	6070
	1200	-	-	-	-	-	-	36221210S	36221210A	36221215S	36221215A	1940	6619
	1400	-	-	-	-	-	-	36221410S	36221410A	36221415S	36221415A	2264	7725
	1600	-	-	-	-	-	-	36221610S	36221610A	36221615S	36221615A	2587	8827
	1800	-	-	-	-	-	-	36221810S	36221810A	36221815S	36221815A	2911	9932
	2000	-	-	-	-	-	-	36222010S	36222010A	36222015S	36222015A	3234	11034

Δt50 is the UK's industry standard for heating outputs, which has an operating temperature of 75/65/20°C. If you have a low temperature heat source you may wish to consider Δt40 or Δt30 output (see your installer or system designer or download from www.stelrad.com).

For EN442 data, technical and installation information please visit our website: www.stelrad.com and search product downloads.

ACCESSORIES INCLUDED:

- ¾ inch male thread H block
- Preset thermostatic valve which regulates water supply in the radiator
- Thermostatic head with built in sensor



TECHNICAL INFORMATION

Many technical features are constant across the Stelrad ranges, as outlined here - apart from the Radical Energy Saving Radiator, which has its own technical information pages (see www.stelrad.com). Each section's introduction page provides you with any further technical information specific to the ranges included.

EXTRA PERFORMANCE TO GUARANTEED STANDARDS

Stelrad combine the most sophisticated production resources in Europe with substantial investment in testing and verification of performance data - which has helped us create high output radiators delivering heating performance that exceeds expectation.

MORE CHOICE FOR APPLICATION FLEXIBILITY

A range of models provide extra sizing flexibility and covers a multitude of application requirements, including those where there are installation difficulties or where wall space is at a premium.

SUPERB QUALITY FROM DESIGN TO INSTALLATION

Our radiators are specifically designed to minimise any movement, providing a tight, professional fit that will remain in place, even after storage, transit and installation. Convectors are precision welded directly onto the waterways for greater efficiency and economy, with flexible connection options for the highest of commercial and domestic application specifications.

Stelrad radiators are manufactured under ISO 9001 quality systems in the UK and every one comes wrapped in robust, practical packaging that will keep the product pristine, right through to installation. This clever packaging design allows installation to be completed prior to removal.

TEMPERATURE TABLE

For systems not operating at Δt_{50} the factors in the table below should be applied. The output of a given radiator can be obtained by multiplying the quoted Δt_{50} output by the operating factor. Conversely, to derive a non Δt_{50} output, divide the heat output required by the relevant operation factor. This ' Δt_{50} equivalent output' can then be used to select a radiator from the standard tables.

°C		°F	
Δt	Operating Factor	Δt	Operating Factor
5	0.050	10	0.057
10	0.123	20	0.142
15	0.209	30	0.240
20	0.304	40	0.348
25	0.406	50	0.466
30	0.515	60	0.590
35	0.629	70	0.721
40	0.748	80	0.858
45	0.872	90	1.000
50	1.000	100	1.147
55	1.132	110	1.298
60	1.267	120	1.454
65	1.406	130	1.613
70	1.549	150	1.776
75	1.694	-	-

Example: Exact output at Δt_{50} = 2000 Btu/hr
Output at Δt_{30} = 2000×0.515 = 1030 Btu/hr
Average coefficient of 130 is used in the example above

APPLICATIONS

Stelrad radiators are suitable for two pipe installations. For single pipe applications, it is advisable to use diversion tees in the pipework, as this will assist in obtaining design performance from the radiators. Although our radiators are suitable for Microbore pipework, the back tappings make them unsuitable for twin entry valves.

INSTALLATION

Everything required for installation can be found within each radiator's packaging. Brackets are of a strong design, with open top and deep slots, which facilitate easy and secure installation. Plastic inserts seat the radiator precisely on the bracket minimising expansion and contraction noise.

The neat nickel-plated plug and vent provide a watertight joint, whilst complementing the superior finish.

To facilitate easy one off replacement, nickel-plated brass extension pieces are also available, complete with sealing washer, in 20mm, 30mm and 40mm options. Recommended height from the floor to the base of the radiator is 150mm minimum. This allows adequate airflow when the radiator is placed on the bracket.

CAUTION

When designing for domestic systems we recommend that the Stelrad radiators are only used in heating systems complying with British Standard Code of Practice for Central Heating for Domestic Premises BS EN 12828:2003 and BS EN 12831:2003.

Single feed, direct cylinders are not recommended as should interchange of water occur, fresh aerated water would enter the heating system, resulting in corrosion.

WATER TREATMENT

On completion of the installation, the system should be properly flushed and filled in accordance with the British Standard Code of Practice BS 7593:2006 for the Treatment of Water in Domestic Hot Water Central Heating Systems, Part L of Building Regulations and Good Practice Guidance for Scotland.

After installation of a new Stelrad radiator the central heating system should be cleaned and flushed with cleaner to remove existing contaminants, flux residue and other installation debris which, if left, can cause damage to the new radiator. Afterwards, treat the system with an inhibitor to ensure long term protection against corrosion and limescale.

A comprehensive range of quality chemicals including inhibitors, cleaners, leak sealers and noise reducers that protect and maintain central heating systems can be obtained from:

Sentinel Performance Solutions Ltd

7650 Daresbury Park,
Warrington,
Cheshire, WA4 4BS,
www.sentinelprotects.com

Fernox

Unit 2 Genesis Business Park,
Albert Drive, Sheerwater,
Woking, Surrey,
GU21 5RW
www.fernox.com

TWO COAT PAINT PROCESS

Each Stelrad radiator is subjected to a multi stage cleaning process before the paint is applied. This involves several rinsing stages, including an iron phosphate and demineralisation rinse. The first coat of paint is applied by electrophoresis and the radiator is then stoved and cooled. The second powder coat is applied and the radiator goes through a final curing stage. It is then allowed to cool, prior to packaging.



STELRAD'S ADVANCED
HEATLOSS CALCULATOR

The Stelrad STARS Basic & Advanced Heatloss Calculator contains an inbuilt U value calculator.

Save time and effort by using the Stelrad STARS program - the perfect solution for accurate sizing and design flexibility.

Basic: <http://starsapp.co.uk/basic-heat-loss-calculator/>

Advanced: <http://app.starsapp.co.uk/login>

For further information and advice call 0844 543 6200.

ACCESSORIES

VERTICAL ULTRA TOWEL RAIL BAR



400mm UIN 83200004
500mm UIN 83200005
600mm UIN 83200006

Available for the
Vertical Ultra only.

VITA ULTRA TOWEL RAIL BAR



400mm wide UIN 83100004
600mm wide UIN 83100006
800mm wide UIN 83100008
1000mm wide UIN 83100010

Available for the
Vita Ultra only.

PRESET KEY



Part of the hardware pack.
UIN no. 9222

Available for the
Radical and Vita Eco only.

ADDITIONAL TOWEL RAIL



300mm UIN 147995
400mm UIN 147996
460mm UIN 147997
620mm UIN 147998

Available for the Ellipse,
Esprit & Vistaline Only.

DRYING AND STACKING RAIL



UIN 147999
ME46 Chrome

Available for the
Vistaline & Ellipse only.

FULL HEIGHT & ANTI-LIFT BRACKETS



300mm wide UIN 9191
400mm wide UIN 9192
450mm wide UIN 9193
500mm wide UIN 9194
600mm wide UIN 9195
700mm wide UIN 9196

Full height and anti-lift brackets
are available for a secure fixing
in commercial applications.

Available for all the products
within the Vita Series, Stelrad
Series, Softline Series plus the
Planar & Compact with Style
within the Designer Series.

EXTENSION PIECES



Optional extension pieces
for easy replacement.

20mm UIN 9176
30mm UIN 9177
40mm UIN 9178

Available for all the products
within the Vita Series, Aqua
Series, Stelrad Series, Softline
Series, Designer Series &
Special Application Series.

3/4" VALVE ADAPTOR



Optional 3/4" valve adaptor for
connection without performance
reduction.

UIN 140117

Available for all the products
in the Vita Series, Aqua Series,
Stelrad Series & Special
Application Series.

CHROME ROBE HOOKS



UIN 147988

Available for the Vistaline,
Ellipse & Esprit only.

FLOOR MOUNTING BRACKETS



300mm UIN 9179
450mm UIN 9180
500mm UIN 9197
600mm UIN 9181
700mm UIN 9182
(sold single)

Floor standing brackets provide a practical solution for standard models, where situations, such as tiled walls, create installation difficulties.

Available for all the products in the Stelrad Series & Softline Series. Plus the Vita Value, Vita Compact, Vita Deco, Vita Plan, Vita Eco, Planar, Compact with Style & Special Application Series.

COLUMN FLOOR MOUNTING BRACKETS




UIN 148137 White
UIN 148138 Anthracite Grey
(sold in pairs)

Available for the Classic Column, Vita Column & Softline Column in White.

Available for the Vita Column Concept & Softline Column Concept in Anthracite Grey RAL: A7016.

TOWEL RAIL ELECTRIC HEATER ELEMENT



Electric heating element
150 watt UIN 141536
300 watt UIN 141531
615 watt UIN 141532

Available for the Slimline Towel Rail, Classic Towel Rail, Caliente Rail, Caliente Curved Rail & Concord Rail.

ESPRIT ELECTRIC HEATER ELEMENT



Electric heating element
350 watt UIN 148000
650 watt UIN 148001
900 watt UIN 148002

Available for Esprit only.

CENTRE TAP TRV



Available for the Compact Vertex, Compact with Style Vertical, Planar Vertical, Caliente Rail, Caliente Curved Rail, Concord Rail, Optia, Softline Compact Vertical, Softline Deco Vertical, Softline Plan Vertical, Vita Compact Vertical, Vita Deco Vertical, Vita Plan Vertical, Vertical Ultra and Swing.

Straight White UIN 145313
Straight Chrome UIN 145314
Angled Left White UIN 145315
Angled Left Chrome UIN 145316
Angled Right White UIN 145317
Angled Right Chrome UIN 145318

OPTIONAL FITTINGS SUPPLIED

½" Blanking Plug
UIN 140072



Available for the:
Aqua Series,
Stelrad Series,
Softline Series &
Special Application
Series.

T-Piece
UIN 141533



Available for the:
Aqua Series (not Esprit).

PACKAGING



Robust packaging protects the product right through to hand over. Installation instructions can be found on the reverse of the identification label.

Example packaging above, the packaging for each radiator will vary.

ALL FIXINGS

Air Vent &
Blanking Plug



Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Brackets

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Blanking Plug

Saddle Strips

Saddle Strips

Saddle Strips

Saddle Strips

Saddle Strips

Saddle Strips

Saddle Strips

Saddle Strips

Saddle Strips

Saddle Strips

Saddle Strips

Saddle Strips

Saddle Strips

Saddle Strips

Saddle Strips

Saddle Strips

Saddle Strips

Saddle Strips

Saddle Strips

Saddle Strips

Branded Clips

All fixing requirements are complete within the packaging. Content will vary depending on product.

COLOUR GUIDE

COLOUR INFORMATION FOR THE:

Vita Series - Vita Ultra* and all Vita Concept radiators****

Softline Series - All Softline Concept radiators****


Aqua Series - Caliente Rail, Caliente Curved Rail, Concord Rail & Vertical Ultra*

Designer Series - Compact with Style, Planar and Swing

NATURAL COLOURS



NT110
Papyrus white



NT120
Pearl white



NT130
Champagne



NT140
Beige




NT150
Beige grey




NT160
Pebble grey



NT170
Quartz grey



SN110
Cream white



SN120
Cream



SN130
Mocca



SN140
Bordeaux



SN150
Sepia



SN160
Pale blue



SN170
Black

METALLIC COLOURS



ML110
Dove grey



ML120
Titanium grey



ML130
Blue grey



ML140
Granite



ML150
Cappuccino



ML160
Terra brown



ML170
Graphite black

RAL COLOURS



A1004
Golden yellow



A2003
Pastel orange



A3002
Carmine red



A3003
Robin red



A5002
Ultramarine blue



A6018
Yellow green



A7001
Silver grey




A7011
Iron grey




A7016****
Anthracite grey




A7030
Stone grey



A7035
Light grey



A8017
Chocolate brown



A9003
Signal white



A9005
Jet black

*Please note: When choosing a colour only the front fascia panel can be coloured. Where the product height is 1000mm and 1200mm, the emitter, top grille and side panels are black. If the product height is 1800mm and 2000mm, the emitter, top grille and side panels are white.



RAL 9016**
Traffic white
comes as
standard on
all radiators.

Stelrad Radiators are available in white (RAL 9016) as standard, however the specific Radiators identified are now available in a variety of colours.

The colours shown are reproduced as accurately as this process will allow and can be made to order on the identified products.

Vita and Softline Concept radiators are only available in this colour: ****Anthracite Grey.







A shade for every room, for every interior. Opt for warm elegance, baroque ambience or modern minimalism. With Stelrad, you can heat your home in colour. Choose from a full range of stylish radiator colours.

COLOUR INFORMATION FOR THE:

Aqua Series - Vistaline and Ellipse

Designer Series - Classic Column and Concord

RAL COLOURS

						
RAL 7035 Pale grey	RAL 7038 Agate grey	RAL 7036 Platinum grey	RAL 7030 Stone grey	RAL 7037 Dusty grey	RAL 7015 Slate grey	RAL 9005* Jet black
						
RAL 8017 Chocolate brown	RAL 1016 Sulphur yellow	RAL 1021 Cadmium yellow	RAL 1004 Dark Golden yellow	RAL 2008 Light red orange	RAL 3000 Flame red	RAL 3003 Ruby red
						
RAL 3005 Wine red	RAL 6027 Light green	RAL 6034 Pastel turquoise	RAL 6019 Pastel green	RAL 6033 Turquoise blue	RAL 6020 Chrome green	RAL 6005 Light moss green
						
RAL 5014 Pigeon blue	RAL 5002 Ultramarine blue	RAL 5024 Pastel blue	RAL 5022 Night blue	RAL 5010 Gentian blue	RAL 9016** Traffic white	RAL 9010† Pure white
						
RAL 9001 Cream	RAL 1013 Pearl white	RAL 1015 Light ivory	RAL 9002 Grey white			

Metallic Colours

		
2765G Metallic silver	BR 0004 Gilded aluminium	BR 0007*** Satin metal grey

FOR FURTHER INFORMATION
ON RAL COLOURS
PLEASE VISIT WWW.RALCOLOR.COM

All colour radiators have up to an 8 week lead time, and when a coloured radiator or radiators have been ordered they cannot be cancelled or returned.

To request a colour chart please email
marketing@stelrad.com

Where indicated products are only available in this colour: *Excel **Standard white ***Arc, Wave, Optia.
Where indicated products come as standard in RAL 9010 Pure White: †Esprit, Vistaline & Ellipse.

GLOSSARY

Btu/hr	British Thermal Unit per hour is the standard measurement used to state the amount of output of any heat generating device.
Watts	Is another measurement for heat output, 1 watt is equivalent to 3.412 Btu/hr.
P1	Also known as Type 10, is a type of radiator with 1 radiator panel and no convection fins.
P2	Also known as Type 20, is a type of radiator with 2 radiator panels and no convection fins.
K1	Also known as Type 11, is a type of radiator with 1 radiator panel and 1 set of convection fins.
P+	Also known as Type 21, is a type of radiator with 2 radiator panels and 1 set of convection fins.
K2	Also known as Type 22, is a type of radiator with 2 radiator panels and 2 sets of convection fins.
K3	Also known as Type 33, is a type of radiator with 3 radiator panels and 3 sets of convection fins.
Δt	Refers to the difference in temperature between the water circulating in the central heating system and that of the ambient temperature. It is important to use the correct Δt when selecting your radiators, as the same radiator will have different outputs at different water temperatures.
Δt_{50}	Δt_{50} is the UK standard, however Stelrad also quote at lower levels for lower water temperature systems.
Heat loss	Is the amount of heat a room loses, it is therefore an important calculation when determining what size radiator is required to heat a room to the correct level.
UIN	Is the unique identification number for Stelrad products.
Warranty	The warranty covers any defect that is attributable to a manufacturing, assembly or material fault. Further details available on request.
ISO14001	Is a set of International regulations related to the environment.
ISO9001	Is a set of International regulations related to quality management systems.
OHSAS18001	Is a set of International regulations related to health and safety.
TBOE / BOE	Refers to which position the pipes are connected to the radiator, OE means opposite end i.e. 1 pipe on each side, TB is top bottom i.e. 1 pipe is connected to the top and 1 to the bottom, B is both pipes connected to the bottom.
CETIAT tested	A leading independent French laboratory which conducts testing and assessments.
	EN 442 is the European standard which defines the manufacturing standards for radiators and convectors which operate at temperatures of less than 120°C. The standard defines the type of steel which must be used, the type of pressure testing which must be carried out and the accuracy of the heat outputs quoted in the literature.
	The Stelrad Technically Advanced Radiator System heatloss calculator, offers an even simpler way to get sizing of radiators right, first time.
KIWA	Kiwa Ltd is an energy consultancy, Notified Body, UKAS-accredited testing lab and training centre with expertise in gas, oil, solid fuel, biomass and other renewables, construction materials, water and electricity.
RAL	A European wide colour matching system.
BSP	British Standard Piping.
	MARC - the Manufacturers' Association of Radiators and Convectors.
CIBSE	The Chartered Institution of Building Services Engineers is the prime source of expertise in the Building Services industry.
RIBA	RIBA aims to support British architects and introduce new people to the world of architecture.
BIID	The British Institute of Interior Design is a professional organisation for commercial and residential interior designers in Britain.

ICON KEY



2 year warranty that covers any defect that is attributable to a manufacturing, assembly or material fault. Further details available on request.



5 year warranty that covers any defect that is attributable to a manufacturing, assembly or material fault. Further details available on request.



10 year warranty that covers any defect that is attributable to a manufacturing, assembly or material fault. Further details available on request.



15 year warranty that covers any defect that is attributable to a manufacturing, assembly or material fault. Further details available on request.



Continuing Professional Development. CIBSE (Chartered Institute of British Service Engineers) and RIBA (Royal Institute of British Architects). CPD approved courses available.



All radiators with this logo are made to order. Made to order radiators cannot be cancelled or returned once ordered.



Business Information Modelling. Visit www.stelrad.com to download BIM components.



Market leading prices from your market leader.



Outstanding energy efficient radiators with the ability to reduce your bills by up to 10.5%.



Award winning radiators from Stelrad, the UK's number one radiator brand.



All colour radiators have up to an 8 week lead time.



The Maximum working pressure is the limit at which the system can operate. Different designs and types of construction requires different gauges of steel in order achieve the desired working pressure.



Concords are manufactured using 1.5mm thick steel.

CORPORATE SOCIAL RESPONSIBILITY (CSR)

Stelrad recognises that its success is built on integrating business values and operations to meet the expectations of stakeholders. Stelrad's social, economic and environmental responsibilities are to these stakeholders, which are demonstrated throughout its business practises, policies and achievements. Stelrad are committed to Integrated Management Systems for control of Quality, Health and Safety and Environment, which are certificated to BSI OHSAS / ISO standards.

Wherever possible, Stelrad sources renewable and recyclable materials. 100% of all metal and other raw materials throughout the manufacturing process are recycled.

A full CSR policy document is available on request.

To re-order this brochure, call sales admin on 0844 543 6200 and quote UIN: 207599

Safety Certificates



Memberships



Follow us on



@stelrad



facebook.com/
stelradradiators



pinterest.com/
stelrad



youtube.com/user/
stelradradiators



instagram.com/
stelradradiators



Stelrad Limited, Stelrad House, Marriott Road
Mexborough, South Yorkshire, S64 8BN

www.stelrad.com

Telephone: 0844 543 6200

UIN 207599
TRB/5K/0618

