

IBC

Better Boilers

ibcboiler.com

ibcboiler.com

ibcboiler.com

ibcboiler.com

ibcboiler.com



T Series

Titanium Pool + Spa Heat Exchangers

T100, T200, T300, T400

An ultralight, one-piece welded pure titanium heat exchanger, designed for the most aggressive water conditions. Exceptional material strength with the highest resistance to corrosion make the T Series the perfect choice for any application.

APPROPRIATE FOR ANY AND ALL APPLICATIONS SUCH AS:

- Applications with extremely high salt water concentration.
- Swimming pools heated by high temperature sources (steam, refrigerants, solar).
- Corrosive fluids.

DISTINCT ADVANTAGES:

- Total immunity to salt corrosion even at high temperatures.
- Ultra-high thermal performance.
- Coil expansion handles extreme temperature differences.
- Light weight.
- Condensate sub-cooling.

Complete titanium welded design

Heating source on the tube side

Unique helical 8mm heating coils

Pool water on the shell side

Vertical or horizontal installation

Ultra Light - Exceptional Strength



Better Boilers




T Series

Titanium Pool + Spa Heat Exchangers

T100, T200, T300, T400

Technical Product Specifications

HEAT EXCHANGER MODEL	DIMENSIONS					CONNECTIONS		HEAT TRANSFER AREA
	L	A	B	C	D	SHELL F	TUBES G	
	INCHES							
T-100	13.1	4.3	5.3	3.9	3.6	1 1/2	1 1/4	2.24
T-200	20.9	4.3	13.1	3.9	3.6	1 1/2	1 1/4	4.15
T-300	29.9	4.3	22.1	3.9	3.6	1 1/2	1 1/4	6.26
T-400	35.9	4.3	28.1	3.9	3.6	1 1/2	1 1/4	7.71

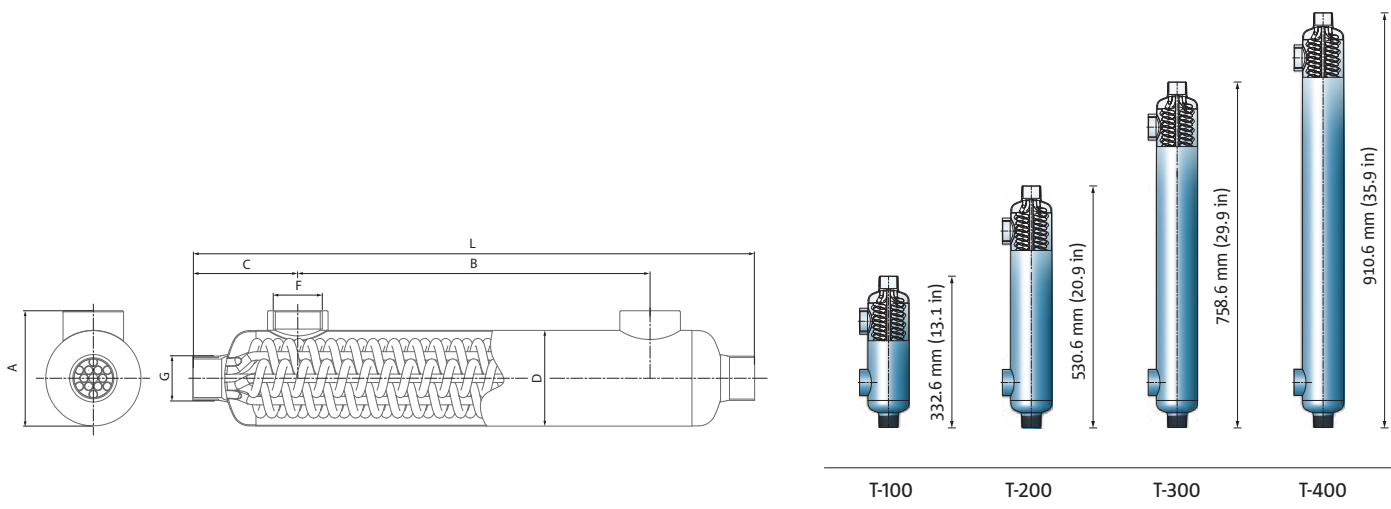

HEAT EXCHANGER MODEL	NOMINAL CAPACITY		HOT WATER SIDE				COLD WATER SIDE			
			FLOW		PRESSURE DROP		FLOW		PRESSURE DROP	
	kW	BTU/hr	LTR/MIN	USG/MIN	kPa	PSI	LTR/MIN	USG/MIN	kPa	PSI
T-100	29	100,000	17	4.6	6.1	0.09	38	10.0	0.3	0.1
T-200	57	200,000	28	7.5	26.7	3.9	61	16.0	1.4	0.2
T-300	87	300,000	36	9.5	63.2	9.2	76	20.0	2.9	0.4
T-400	113	400,000	35	9.1	71.7	10.4	265	70.0	40.7	5.9

Nominal capacity values are based on boiler supply 180°F (82.2°C) and return pool water 80°F (26.7°C).


Evaluate The Boiler Capacity

Ensure that your boiler has enough capacity to reach the required pool temperature, and to maintain it at this temperature through daily use.

To maintain the pool at the required temperature, the boiler should have the capacity to handle the pool heat losses, calculated as:

Heat Loss [Btu/hr] = 12 x [pool surface area (sqft)] x [pool temperature (°F) - air temperature (°F)]

Boiler Selection Chart

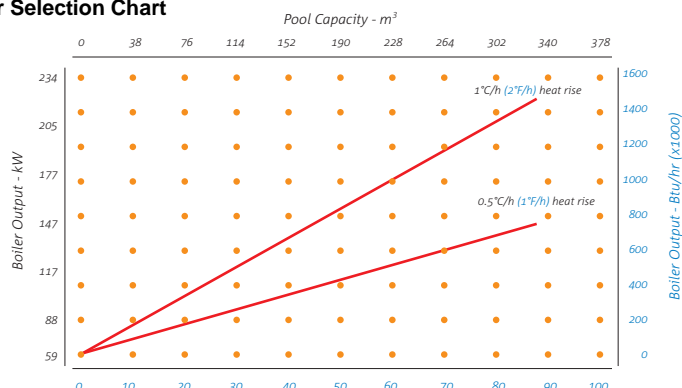

Based on heating source 180°F (82.2°C).

Pool Capacity - USGal (x1000)

In the interest of continuous improvement, specification are subject to change without notice.

Canada 8015 North Fraser Way, Burnaby, BC V5J 5M8
Unit 5, 1455 16th Ave, Richmond Hill, ON L4B 4W5
USA 4203 Industrial Court, Sheboygan, WI 53083
Unit 1, 1100 Taylors Lane, Cinnaminson, NJ 08077

Tel: 604 877 0277 Fax: 604 877 0295
Tel: 905 918 0113 Fax: 604 877 0295
Tel: 920 783 8340 Fax: 920 783 8339
Tel: 856 887 0544 Fax: 856 735 5584

www.ibcboiler.com
Toll Free: 1 844 HEAT IBC (432 8422)